


Recommended Minimum Flow for Middle Econfina Creek, including Gainer Spring, Williford Spring, and Sylvan Spring Groups

Washington and Bay Counties, Florida

Draft

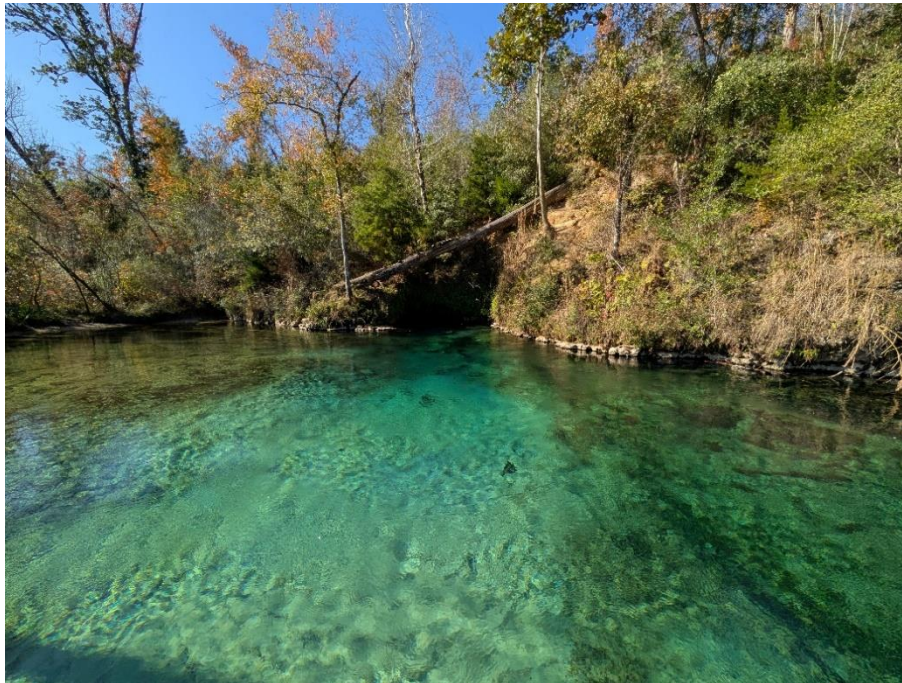

Northwest Florida Water Management District
81 Water Management Drive
Havana, Florida 32333
(850) 539-5999
www.nwfwater.com

January 2025
Program Development Series 25-01



NORTHWEST FLORIDA WATER MANAGEMENT DISTRICT

GOVERNING BOARD

George Roberts
Chair, Panama City

Jerry Pate
Vice Chair, Pensacola

Nick Patronis
Secretary, Panama City

John Alter
Malone

Gus Andrews
DeFuniak Springs

Ted Everett
Chipley

Kellie Ralston
Tallahassee

Anna Upton
Tallahassee

Lyle Seigler
Executive Director



DISTRICT OFFICES

Havana (Headquarters)
DeFuniak Springs
Youngstown
Milton

For Additional Information, write or call:
Northwest Florida Water Management District
81 Water Management Drive
Havana, Florida 32333
850-539-5999
www.nwfwater.com

Table of Contents

TABLE OF CONTENTS	3
LIST OF FIGURES	6
LIST OF TABLES	10
LIST OF ACRONYMS AND ABBREVIATIONS	12
ACKNOWLEDGMENTS	15
EXECUTIVE SUMMARY	16
1 INTRODUCTION	21
1.1 OBJECTIVE	21
1.2 BACKGROUND.....	21
1.3 CONCEPTUAL APPROACH	23
1.4 STUDY AREA	24
2 ECONFINA CREEK AND WATERSHED	26
2.1 ECONFINA CREEK AND WATERSHED.....	26
2.2 ECONFINA CREEK SPRINGS	28
2.2.1 <i>Gainer Spring Group</i>	30
2.2.2 <i>Williford Spring Group</i>	33
2.2.3 <i>Sylvan Spring Group</i>	35
2.3 PHYSIOGRAPHY	37
2.4 HYDROGEOLOGY.....	38
2.5 LAND USE, POPULATION AND STRUCTURAL ALTERATIONS	42
2.5.1 <i>Deer Point Lake Reservoir</i>	46
2.6 PRECIPITATION	47
2.7 WATER QUALITY	50
2.8 IMPACT FROM HURRICANE MICHAEL ON ECONFINA CREEK.....	55
2.9 NATURAL RESOURCES.....	60
2.9.1 <i>Instream Habitats</i>	60
2.9.2 <i>Riparian/Floodplain Habitats</i>	61
2.9.3 <i>Wildlife</i>	61
2.10 RECREATION	65
3 HYDROLOGY	69
3.1 HYDROLOGIC DATA COLLECTION	69
3.2 ECONFINA CREEK DISCHARGE	73
3.3 ECONFINA CREEK SPRING DISCHARGE	74
3.4 HYDROLOGIC EVALUATION FOR USGS STATION 2359500 ECONFINA CREEK NEAR BENNETT, FL.....	76
3.4.1 <i>Trends in Baseflow, Seasonality, and Climatic Conditions</i>	76
3.4.2 <i>Flow Frequencies Post-Hurricane Michael</i>	81
3.4.3 <i>Stage Discharge Relationships Post-Hurricane Michael</i>	82
3.5 HYDROLOGIC EVALUATION FOR NFWFMD STATION 8458 ECONFINA CREEK @SR 20	83
3.5.1 <i>Trends in Baseflow, Seasonality, and Climatic Conditions</i>	83

3.5.2	<i>Flow Frequencies Post-Hurricane Michael</i>	87
3.5.3	<i>Stage-Discharge Relationships Post-Hurricane Michael</i>	88
3.6	GAINER SPRING GROUP DISCHARGE TRENDS.....	89
3.7	GROUNDWATER WITHDRAWALS AND CONSIDERATIONS FOR BASELINE FLOW RECORDS.....	91
3.7.1	<i>Public Supply, Industrial/Commercial/Institutional, and Recreation Groundwater Withdrawals</i>	91
3.7.2	<i>Domestic Self-Supply Groundwater Withdrawals</i>	92
3.7.3	<i>Agriculture Groundwater Withdrawals</i>	94
3.7.4	<i>Groundwater Withdrawal Summary</i>	94
3.7.5	<i>Considerations for Baseline Flow Record</i>	95
4	WATER RESOURCE VALUES AND METRIC DETERMINATION	96
4.1	RECREATION IN AND ON THE WATER	96
4.2	FISH AND WILDLIFE HABITAT AND THE PASSAGE OF FISH.....	97
4.2.1	<i>Fish Passage</i>	97
4.2.2	<i>Instream Woody Habitat Inundation</i>	98
4.2.3	<i>Floodplain Vegetation Inundation</i>	99
4.2.4	<i>In Stream Habitat of Aquatic Species</i>	99
4.3	ESTUARINE RESOURCES	100
4.4	TRANSFER OF DETRITAL MATERIAL	100
4.5	MAINTENANCE OF FRESHWATER STORAGE AND SUPPLY.....	100
4.6	AESTHETIC AND SCENIC ATTRIBUTES	100
4.7	FILTRATION AND ABSORPTION OF NUTRIENTS AND OTHER POLLUTANTS.....	101
4.8	SEDIMENT LOADS	101
4.9	WATER QUALITY	102
4.10	NAVIGATION.....	102
4.11	SELECTION OF WATER RESOURCE VALUES AND ASSOCIATED METRICS.....	102
5	MODELS USED IN MINIMUM FLOW DETERMINATION	104
5.1	HEC-RAS MODEL DEVELOPMENT AND CALIBRATION.....	104
5.2	SEFA MODEL	112
6	EVALUATION OF WATER RESOURCE VALUES AND RESULTS	116
6.1	PASSAGE (LOW FLOW) METRICS EVALUATION.....	116
6.1.1	<i>Methodology</i>	116
6.1.2	<i>Safe Boat Passage</i>	117
6.1.3	<i>Fish Passage</i>	122
6.2	BANKFULL AND OUT-OF-BANK FLOW EVALUATION	125
6.2.1	<i>Evaluation of Wetted Perimeter</i>	125
6.2.2	<i>Evaluation of Bankfull Profile</i>	131
6.3	EVALUATION OF IN STREAM HABITAT.....	132
7	SUMMARY AND RECOMMENDED MINIMUM FLOWS	139
8	ADAPTIVE MANAGEMENT	143
9	REFERENCES	144

10	APPENDICES	150
10.1	APPENDIX A: UPDATE AND CALIBRATION OF THE HYDROLOGIC ENGINEERING CENTER RIVER ANALYSIS SYSTEM (HEC-RAS) MODEL: ECONFINA CREEK SYSTEM.....	150
10.2	APPENDIX B: SEFA MODEL DEVELOPMENT AND EVALUATION OF INSTREAM HABITAT METRICS FOR GAINER SPRING GROUP, WILLIFORD SPRING GROUP, AND SYLVAN SPRING GROUP MINIMUM FLOWS AND LEVELS	150

List of Figures

Figure 1-1. Middle Econfina Creek and Springs MFL Study Area	25
Figure 2-1. Econfina Creek and Deer Point Lake Watersheds	27
Figure 2-2. Locations of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group.....	29
Figure 2-3. Gainer Spring Group Vent Locations	31
Figure 2-4. Gainer Spring Group A) #1C McCormick Spring B) #2 (Emerald Spring) C) #3	33
Figure 2-5. Williford Spring Group Vent Locations	34
Figure 2-6. Williford Spring (Photo taken prior to impacts associated with Hurricane Michael on October 10, 2018).	35
Figure 2-7. Sylvan Spring Group Vent Locations.....	36
Figure 2-8. Sylvan #1	37
Figure 2-9. Land Surface Elevations Within and Adjacent to the Groundwater Contributing Area to the Middle Reach of Econfina Creek and Associated Springs.	38
Figure 2-10. Estimated Thickness of The Surficial Aquifer System in the Vicinity of the Contributing Area to The Middle Reach of Econfina Creek and Associated Springs, Based on Data from Williams and Dixon (2015).....	40
Figure 2-11. Estimated Thickness of the Upper Confining Unit of the Floridan Aquifer System in the Vicinity of the Contributing Area to the Middle Reach of Econfina Creek And Associated Springs, Based on Data From Williams And Dixon (2015).....	41
Figure 2-12. Estimated Thickness of the Upper Floridan Aquifer in the Vicinity of the Contributing Area to the Gainer-Sylvan-Williford Group of Springs, Based on Data from Williams and Dixon (2015)	42
Figure 2-13. Econfina Creek Watershed Land Use (2019 Land Use Data, DEP 2019)	44
Figure 2-14. Econfina Creek Water Management Area	45
Figure 2-15. Comparison of Deer Point Lake levels with Econfina Creek Stage.....	47
Figure 2-16. Annual Precipitation Totals and Long-Term Annual Average Precipitation for NWS Station USC00086842 Located in Panama City, FL and NWS station USW00073805 Located at the Northwest Florida Beaches International Airport (September 2023 - December 2023)	48
Figure 2-17. Monthly Precipitation Averages for NWS Station USC00086842 Located in Panama City, FL and NWS station USW00073805 located at the Northwest Florida Beaches International Airport (September 2023 - December 2023)	49
Figure 2-18. Twelve Month Standard Precipitation Index for NWS Station USC00086842 Located in Panama City, FL and NWS station USW00073805 Located at the Northwest Florida Beaches International Airport (September 2023 - December 2023).....	49
Figure 2-19. A) Nitrate Concentration at Gainer Spring Group between 2001 and 2023 B) Specific Conductance at Gainer Spring Group between 2001 and 2024 C) Dissolved Oxygen at Gainer Spring Group between 2001 and 2024	53
Figure 2-20. A) Nitrate Concentration at Williford Spring between 1994 and 2023 B) Specific Conductance at Williford Spring between 1994 and 2023 C) Dissolved Oxygen at Williford Spring between 1994 and 2023	54

Figure 2-21. A) Nitrate Concentration versus Gainer Spring Group Composite Discharge B) Specific Conductance versus Gainer Spring Group Composite Discharge C) Dissolved Oxygen versus Gainer Spring Group Composite Discharge	55
Figure 2-22. Econfina Creek and Floodplain, November 10, 2018	56
Figure 2-23. Econfina Creek Stage @ SR 20 from 7/15/2018 to 4/1/2019.	56
Figure 2-24. Debris Removal on Econfina Creek (as of 3/29/2019)	58
Figure 2-25. Econfina Creek near Scott Rd., April 2023	59
Figure 2-26. Econfina Creek between SR 20 and CR 388, January 2023	60
Figure 2-27. A) Gulf Moccasinshell (<i>Medionidus penicillatus</i>) and B) Oval Pigtoe (<i>Pleurobema pyriforme</i>). Photos Provided by the Florida Fish and Wildlife Conservation Commission.....	64
Figure 2-28. Econfina Creek Paddling Trail (Reprinted from FDEP Econfina Creek Paddling Guide, 2023)	67
Figure 2-29. Williford Spring Recreation Area (Photo taken post Hurricane Michael)	68
Figure 3-1. Econfina Creek Surface Water Monitoring Stations and Groundwater Monitoring Wells	72
Figure 3-2. Flow Frequency Curves for Econfina Creek Surface Water Stations.....	73
Figure 3-3. Flow Frequency Curve for Gainer Spring Group Composite Discharge	75
Figure 3-4. Daily Flow Hydrograph and Baseflow Hydrograph at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388).....	77
Figure 3-5. Average Monthly Flow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)	78
Figure 3-6. Baseflow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) versus Preceding Two-year Moving Average Monthly Total Rainfall from the National Weather Service Station USC00086842 Located in Panama City, Florida.....	79
Figure 3-7. Baseflow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) versus Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to Present.....	80
Figure 3-8. Linear Regression Between Baseflow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) and Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to Present.....	80
Figure 3-9. Flow Frequency Curve for the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)	81
Figure 3-10. Flow Frequency Curve for Surface Water Inputs for the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388).....	82
Figure 3-11. Comparison of Stage-Discharge Relationships for the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388).....	83
Figure 3-12. Daily Flow Hydrograph and Baseflow Hydrograph at the NFWWMD Station 8458 Econfina Creek @ SR 20.....	84
Figure 3-13. Average Monthly Flow at NFWWMD Station 8458 Econfina Creek @ SR 20	85
Figure 3-14. Baseflow at the NFWWMD Station 8458 Econfina Creek @ SR 20 versus Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to 2023	86

Figure 3-15. Linear Regression Between Baseflow at the NFWMD Station 8458 Econfina Creek @ SR 20 and Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to 2023	86
Figure 3-16. Flow Frequency Curve for the NFWMD Station 8458 Econfina Creek @ SR 20	87
Figure 3-17. Flow Frequency Curve for Surface Water Inputs for the NFWMD Station 8458 Econfina Creek @ SR 20.....	88
Figure 3-18. Comparison of Stage-Discharge Relationships for the NFWMD Station 8458 Econfina Creek @ SR 20.....	89
Figure 3-19. Gainer Spring Group Composite Discharge Measurements (1962-2022).....	90
Figure 3-20. Gainer Spring Group Composite Discharge Measurements (2002-2022).....	90
Figure 5-1. Econfina Creek and Springs MFL HEC-RAS Model Extent	105
Figure 5-2. Econfina Creek Field Reconnaissance, June 2021	107
Figure 5-3. Econfina Creek Monitoring Stations Utilized to Develop Model Boundary Conditions ..	108
Figure 5-4. Comparison of Measured Stage-Discharge Rating at NFWMD 8548 (Econfina Creek @ SR 20 Station) With Final Simulated Stage-Discharge Rating at XS 17965 (Nearest XS to Econfina Creek @ SR 20 Station) for Calibration Period from 4/1/2019 through 9/18/2023	110
Figure 5-5. Comparison of Measured Stage-Discharge Rating at NFWMD 8100 (Econfina Creek Below Gainer Spring Group) With Final Simulated Stage-Discharge Rating at XS 17077 (Nearest XS to Econfina Creek Below Gainer Spring Group) for Calibration Period from 4/1/2019 through 9/18/2023	111
Figure 5-6. Comparison of Measured Stage-Discharge Rating at USGS 2359500 (Econfina Creek @ CR 388) With Final Simulated Stage-Discharge Rating at XS 7624 (Nearest XS to Econfina Creek @ CR 388 Station) for Calibration Period from 4/1/2019 through 9/18/2023.....	112
Figure 6-1. Critical Elevation and Minimum Modeled Water Levels for Safe Canoe/Kayak Passage Along Econfina Creek.....	120
Figure 6-2. Critical Elevation and Minimum Modeled Water Levels for Safe Power Boat Passage Along Econfina Creek.....	122
Figure 6-3. Critical Elevation and Minimum Modeled Water Levels for Safe Fish Passage Along Econfina Creek	124
Figure 6-4. Example Topography in the Upper and Lower Portion of the Domain A) Zoomed in B) Zoomed out.....	127
Figure 6-5. Example Model Transect in the Upper and Lower Portion of the Domain. Flows depicted are for the 99 percent percentile A) [text] B) [text]	128
Figure 6-6. Average Transect Weighted Wetted Perimeter versus Flow at Econfina Creek @ CR 388, above XS 6361.....	129
Figure 6-7. Average Transect Weighted Wetted Perimeter versus Flow at Econfina Creek @ SR 20 below XS 6361.....	130
Figure 6-8. Bank Profile for Econfina Creek Study Area	132
Figure 6-9. Conceptual Depiction of the Estimation of the Critical Flow Resulting in a 15% Reduction in AWS.....	133
Figure 6-10. Relationship between Flow at Econfina Creek @ CR 388 and AWS for Species and Guilds of Interest.	135

Figure 7-1. Proposed MFL Flow Frequency Curve for Econfina Creek @ CR 388 for WRV Metrics
Evaluated 142

Figure 7-2. Allowable Flow Reductions at Econfina Creek @ CR 388 for WRV Metrics Evaluated.... 142

List of Tables

Table 1-1. Environmental Values (62-40.473, Florida Administrative Code)	22
Table 2-1. Econfina Creek Watershed Land Use.....	43
Table 2-2. Gainer Spring Group Water Quality Summary Statistics.....	50
Table 2-3. Williford Spring Water Quality Summary Statistics.....	51
Table 2-4. Sylvan Spring Water Quality Summary Statistics	51
Table 2-5. Trends in Gainer Spring Group Water Quality.....	52
Table 2-6. List of Fish Species Documented Along Econfina Creek.....	63
Table 2-7. List of Mussels Documented in Econfina Creek and Their Known Host Fish Species. Species in Bold are Federally Listed as Endangered. Host Fish Species Identified from: Freshwater Mussel Host Database, Illinois Natural History Survey Mollusk Collection. https://mollusk.inhs.illinois.edu/57-2/	65
Table 2-8. List of Documented Invertebrate Species along Econfina Creek. No Documented Invertebrate Species are Listed and as Threatened or Endangered	65
Table 3-1. Summary of Surface Water Hydrologic Data Collection for Econfina Creek and Deer Point Lake Watersheds.....	70
Table 3-2. Summary of Groundwater Hydrologic Data Collection for Econfina Creek Watershed	71
Table 3-3. Flow Comparison for Econfina Creek Surface Water Stations (cfs)	74
Table 3-4. Percent of Flow for Econfina Creek Surface Water Stations Relative to CR 388 Station	74
Table 3-5. Econfina Creek Spring Discharge Summary (cfs).....	75
Table 3-6. Median flow Comparison between SR 20 and Walsingham Bridge (cfs)	76
Table 3-7. Flow Comparison among CR 388, SR 20, and Gainer Spring Group	76
Table 3-8. Gainer Spring Group Composite Discharge Summary Statistics	90
Table 3-9. Water Use Projections for Counties Within Middle Econfina Creek GWCA from 2023 NFWFMD Water Supply Assessment (NFWFMD 2023)	91
Table 3-10. Estimated 2045 Water Use Projections for Portion of Counties Within Middle Econfina Creek GWCA.....	92
Table 3-11. DSS Water Use Estimates and Projections for Counties Within Middle Econfina Creek GWCA from 2018 and 2023 NFWFMD Water Supply Assessment (NFWFMD 2018, NFWFMD 2023)	93
Table 3-12. DSS Water Use Estimates and Projections for DSS Wells Within Middle Econfina Creek GWCA.....	93
Table 3-13. Agriculture Water Use Estimates and Projections for Irrigated Fields Within Econfina GWCA.....	94
Table 3-14. Groundwater Withdrawal Estimates and Projections Within Middle Econfina Creek GWCA.....	94
Table 4-1. Selected Water Resource Values, Indicators, and Metrics Utilized to Determine Minimum Flows for Middle Econfina Creek and Associated Spring Groups.....	103
Table 5-1. Surface Water Stations and Available Period of Record for Calibration of the Econfina Creek MFLs HEC-RAS Model	109
Table 5-2. Model Calibration Performance Metrics	112

Table 5-3. Fish Species Documented in Econfina Creek for Which Habitat Suitability Curves are Available.....	114
Table 6-1. Results for Evaluation of Canoe and Kayak Passage Metrics. Metric defined as a 1.5 ft. depth at transect thalweg	118
Table 6-2. Results for Evaluation of Power Boat Passage Metrics. Metric defined as: 1- Minimum 2 ft. depth across a 15 ft. continuous width for transects 18013 and above. 2- Minimum 2 ft. depth across a 30 ft. Continuous width for transect 17986 and below.	120
Table 6-3. Calculation of Allowable Flow Reductions for Critical Boat Passage Transects	122
Table 6-4. Results for Evaluation of Fish Passage. Metric defined as a 0.6 ft. depth at transect thalweg.	123
Table 6-5. Flow Reduction Associated with 15% Reduction in Weighted Wetted Perimeter (WWP), above XS 6361.....	129
Table 6-6. Flow Reduction Associated with 15% Reduction in Weighted Wetted Perimeter (WWP), below XS 6361.....	130
Table 6-7. Flow Reduction Associated with 15% Reduction in Maximum Area Weighted Suitability (AWS)	138
Table 7-1. Summary of WRV Metrics and Allowable Flow Reductions at the Econfina CR 388 Gauge	141
Table 7-2. Recommended Minimum Flow for Middle Econfina Creek, Inclusive of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group	141

List of Acronyms and Abbreviations

AMEC	AMEC Environmental and Infrastructure, Inc.
AG	Agriculture
AMO	Atlantic Multidecadal Oscillation
ATM	Applied Technology and Management, Inc.
AWS	Area Weighted Suitability
XS	Cross Section or Transect
cfs	Cubic Feet per Second
CR	County Road
df	Degree of Freedom
DEP	Department of Environmental Protection of Florida
DEM	Digital elevation model
DSS	Domestic Self-Supply
ESA	Environmental Science Associates
FEMA	Federal Emergency Management Agency
ft.	Feet
FDACS	Florida Department of Agriculture and Consumer Services
FWC	Florida Fish and Wildlife Conservation Commission
FNAI	Florida Natural Areas Inventory
FSAID	Florida Statewide Agricultural Irrigation Demand
GSW	Gainer, Sylvan, and Williford Springs
GWCA	Groundwater Contribution Area
HSC	Habitat Suitability Curve
HEC-RAS	Hydrologic Engineering Center River Analysis System
HYSEP	USGS computer program for streamflow hydrograph separation

ICI	Industrial/Commercial/Institutional
in.	Inches
IWUP	Individual Water Use Permit
IFIM	Instream Flow Incremental Methodology
LiDAR	Light Detection and Ranging
MSE	Mean Square Error
µS/cm	Microsiemens per Centimeter
mi ²	miles, squared
mgd	Million Gallons per Day
mg/L	Milligram Per Liter
MFL	Minimum Flow and Level
NOAA	National Oceanographic and Atmospheric Association
NWS	National Weather Service
N	Nitrogen
NAVD	North American Vertical Datum
NWFID	Northwest Florida Identification Number
NFWMD (District)	Northwest Florida Water Management District
OFS	Outstanding Florida Spring
P or PF	Percentile Flow
PS	Public Supply
QA/QC	Quality Assurance/ Quality Control
R ²	R Squared (coefficient of determination)
rd.	Road
REC	Recreation
SJRWMD	St. Johns River Water Management District

SWFWMD	Southwest Florida Water Management District
Sp. or Spp.	Species
SPI	Standard Precipitation Index
SR	State Road
SAV	Submerged Aquatic Vegetation
SRWMD	Suwannee River Water Management District
SEFA	System for Environmental Flow Analysis
USF	University of South Florida
USGS	United States Geological Survey
WIN	Watershed Information Network
WRV	Water Resource Value
WS	Water Surface Elevation
WSA	Water Supply Assessment
WWP	Weighted Wetted Perimeter
α	alpha, significance level

Acknowledgments

This technical assessment was developed by the Northwest Florida Water Management District to establish minimum flows for Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group in accordance with Section 373.042, Florida Statutes. The report was prepared under the supervision and oversight of Lyle Seigler, Executive Director, and Kathleen Coates, Director, Division of Resource Management.

The authors would also like to recognize personnel from Geosyntec Consultants, Inc. (formerly Applied Technology and Management, Inc.), Environmental Science Associates (formerly Janicki Environmental, Inc.), Southeastern Surveying and Mapping Corporation, and others who contributed to the completion of this project. In particular, the authors would like to recognize Bob Burleson (Geosyntec Consultants, Inc.) and Tony Janicki (Environmental Science Associates) for their continued technical assistance and model development during this project. The authors would also like to thank the Florida Department of Environmental Protection and Florida Fish and Wildlife Conservation Commission for their assistance and guidance throughout this project. We are also grateful to members of the public who took time to provide comments.

Executive Summary

Section 373.042(1), Florida Statutes, provides that the minimum flow for a given water body is defined as “the limit at which further withdrawals would be significantly harmful to the water resources or ecology of the area.” As such, this minimum flow evaluation focuses solely on the effects of reduced spring flows from surface water and groundwater extraction (i.e. consumptive uses) to the ecology of middle Econfina Creek, inclusive of the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group as well as the associated spring runs. This report provides the technical analysis for determining recommended minimum flows for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group.

The study area encompasses the 11.8-mile portion of Econfina Creek between the Williford Spring Group and Deer Point Lake at the confluence of Econfina Creek and Bear Creek as well as the associated spring runs and is also referred within this report as “middle Econfina Creek” (Figure 1-1). The Gainer Spring Group is one of five first magnitude springs located within the Northwest Florida Water Management District (District) jurisdiction and is designated by the State of Florida as an Outstanding Florida Spring (OFS). Williford Spring Group and Sylvan Spring Group are second magnitude spring groups located within the District-owned Econfina Creek Water Management Area. The portion of Econfina Creek north of the Williford Spring run is not directly influenced by the three spring groups of interest and therefore was excluded from the study area. Likewise, the portion of Deer Point Lake below Bear Creek was excluded as the influence of spring flow on total Econfina Creek flow diminishes below CR 388 due to inflows from several surface water tributaries in the vicinity. Future evaluations may consider portions of Econfina Creek above Williford Spring Group, including the remaining second magnitude springs along Econfina Creek.

Average period of record discharge for the Gainer Spring Group is 165 cubic feet per second (cfs). The Gainer Spring Group comprises two primary spring runs as well as Emerald Spring, which is the largest of 15 vents within the spring group. Average period of record discharge for Williford Spring Group is 42 cfs. Williford Spring Group’s primary vent is a single large vent located at the head of its run with a noticeable surface boil. Several smaller vents additionally contribute their discharge to the 450 ft. spring run before it enters Econfina Creek. Average period of record discharge for Sylvan Spring Group is 18 cfs. Sylvan Spring Group consists primarily of a collection of fissure type spring vents in three locations along its spring run.

Econfina Creek, including Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, is home to numerous wildlife species and is extensively utilized for recreation. The majority of the study area remains in relatively natural condition as development along much of the system is relatively limited compared to other rivers in Florida. Land uses within the Econfina Creek watershed are predominantly natural areas, including upland forest, wetlands, open land, and open water. To protect Econfina Creek and its groundwater contribution zone, the District has acquired and currently manages 41,747 acres of public lands in the Econfina Creek Water Management Area.

The development of minimum flows for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group builds upon methods applied elsewhere in Florida, as well as for minimum flows established for St. Marks River Rise and Wakulla and Sally Ward springs by the District. The District’s approach to

establishing MFLs for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group is that a hydrologic regime exists such that the system’s water resource values are protected from significant harm caused from water withdrawals. The approach is based on quantifiable relationships between spring discharge and multiple physical and ecological features related to specific water resource values (WRVs). Rule 62-40.473, Florida Administrative Code, outlines requirements regarding ten specific WRVs which must be considered in setting MFLs. WRVs determined to be relevant to establishment of minimum flows along Middle Econfina Creek are shown in Table E-1 below.

Table E-1. WRVs Relevant to The Establishment of Minimum Flows Along Middle Econfina Creek

Water Resource Value (WRV)	Relevant to Establishment of MFLs	Relevant to Out-of-Bank Flows	Not Relevant to Establishment of MFLs
Recreation in and on the water	X		
Fish and wildlife habitats and the passage of fish	X		
Estuarine resources			X
Transfer of detrital material		X	
Maintenance of freshwater storage and supply		X	
Aesthetic and scenic attributes		X	
Filtration and absorption of nutrients and other pollutants		X	
Sediment loads		X	
Water quality	X		
Navigation			X

For each WRV used in MFL analysis, quantitative metrics were utilized to relate WRVs to spring flows and to assess potential effects of reductions in flows from middle Econfina Creek, including Gainer, Williford, and Sylvan Spring groups. Recreation was evaluated in terms of the frequency of sufficient water depths for recreational motorized boat and canoe/kayak passage within the Econfina Creek study area. Metrics for fish and wildlife habitat included frequency of sufficient water depths for fish passage and evaluation of instream habitat for numerous fish and mussel species found within Econfina Creek. Metrics pertaining to protection of out-of-bank flows were considered since maintaining out-of-bank flows may contribute to preserving the ecological health of Econfina Creek. These metrics included evaluation of the effect of potential reduced spring flows on the wetted perimeter and bankfull profile of Econfina Creek.

Due to the majority of the groundwater contribution area comprising public lands including the Econfina Creek Water Management Area, consumptive withdrawals are minimal. Total groundwater withdrawals within the middle Econfina Creek groundwater contribution area were 1.15 million gallons per day (mgd) in 2020. This area is expected to remain mostly undeveloped, with projected groundwater withdrawals of 1.41 mgd in 2045.

Seasonal fluctuations in spring flow from Gainer, Williford, and Sylvan Spring groups were examined and determined to be small, particularly relative to other Florida rivers. Because seasonal variations are relatively small and the metrics utilized in MFL determination are relevant throughout the year, period of record flows, rather than seasonal flow blocks, were used to develop the proposed minimum flows. Structural alterations were considered, such as backwater effects from Deer Point Lake, which were determined to minimally impact flows within the middle Econfina Creek study area.

Additionally, the effects of Hurricane Michael, which made landfall near Mexico Beach, Florida, on October 10, 2018, as a Category Five storm, was evaluated as part of this MFL assessment. The hurricane cut an intensely destructive path across several counties of the Florida Panhandle. In addition to damaging structures and communities, the storm devastated forests throughout the region. As a result, fallen trees and vegetation debris smothered numerous streams, rivers, and accompanying floodplains, with Econfina Creek being among the hardest hit. Debris within stream channels restricts water flow and reduces stream capacity, therefore altering stream hydrology. Extensive woody debris removal efforts were conducted by DEP following Hurricane Michael within the Econfina Creek channel. Since these efforts were completed, Econfina Creek was restored to a more natural condition representative of the historical hydrologic regime. Hydraulic models utilized for this MFL technical assessment were developed based on conditions following debris cleanup along Econfina Creek and represent a recent period which is also reflective of historical conditions.

Hydraulic (Hydrologic Engineering Center River Analysis System, or HEC-RAS) and in-stream habitat (System for Environmental Flow Analysis, or SEFA) models were used to determine the flow regime needed to prevent significant harm from withdrawals. Although significant harm is not specifically defined in statute, a maximum of 15-percent reduction in water resource value metrics is used in this MFL evaluation. This threshold for significant harm has been implemented as the protection standard for numerous MFLs throughout Florida and has been accepted by more than a dozen MFL peer review panels (Gore et al. 2002, Munson and Delfino 2007, NFWFMD 2021, NFWFMD 2019, SJRWMD 2017, SRWMD 2005, SRWMD 2007, SRWMD 2013, SRWMD 2015, SRWMD 2016a, SRWMD 2016b, SRWMD 2021, SWFWMD 2008, SWFWMD 2010, SWFWMD 2011, SWFWMD 2012a, SWFWMD 2012b, SWFWMD 2017a, SWFWMD 2017b). The implementation of the MFLs for the middle Econfina Creek, inclusive of the Gainer, Williford, and Sylvan Spring groups, will follow an adaptive management approach, with MFLs periodically reviewed and revised by the District as needed to incorporate new data and information.

The reference gauge selected to establish a combined minimum flow for the middle Econfina Creek system, inclusive of flow inputs from Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, is the USGS station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388). This station was selected as the reference gauge since it is located downstream of all spring groups of interest and has a sufficient period of record which could be utilized to determine historical baseline conditions (October 1, 1935 to October 14, 2023). The middle Econfina Creek baseline flow record was determined by adjusting the historical flow record for USGS station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) by adding in the estimated 2020 annual average daily withdrawals within the contribution area of 1.15 mgd (1.78 cfs) to all average daily flows in the historical record. This serves as a conservative estimate of withdrawal impacts on middle Econfina Creek baseline flows.

Flow reductions from baseline hydrologic conditions were evaluated for various flows associated with safe boating, fish passage, maintaining bankfull flows, and protecting instream habitat of aquatic species within middle Econfina Creek (See Section 6 for details). For each metric evaluated, the “critical” flow was determined at specific locations throughout middle Econfina Creek and translated to an equivalent flow (based on flow percentile) at the reference gauge (Econfina Creek @ CR 388). Allowable reductions in middle Econfina Creek flow corresponding to a 15-percent reduction in inundation frequency (e.g., time) were determined for metrics pertaining to safe boating and fish passage. Allowable reductions in middle Econfina Creek flow corresponding to a 15-percent reduction in inundation frequency (e.g., time) as well as a 15-percent reduction in weighted wetted perimeter were determined for metrics pertaining to maintaining bankfull flows. Allowable reductions in Econfina Creek flow corresponding to a 15-percent reduction in maximum area weighted suitability, a measure of habitat availability, were determined to protect instream habitat of aquatic species.

A summary of allowable flow reductions at Econfina Creek @ CR 388 gauge for each WRV metric evaluated is shown in table E.2 below. The most limiting metric is instream habitat associated with the slow water velocity shallow depth guild including species such as the redbreast sunfish, bluegill, and largemouth bass, with an allowable flow reduction of 51 cfs associated with a baseline flow at CR 388 of 311 cfs. Weighted wetted perimeter top of bank inflection point, above HEC-RAS stream transect 6361, had an allowable flow reduction of 69 cfs, associated with a baseline flow at CR 388 of 639.8 cfs. Weighted wetted perimeter top of bank inflection point, below HEC-RAS stream transect 6361, had an allowable flow reduction of 156 cfs, associated with a baseline flow at CR 388 of 327.8 cfs. Safe power boating was achieved throughout the study area for all but the lowest flow scenarios simulated. The limiting or critical HEC-RAS stream transect for power boating is located in the upper reach of the study area, in the vicinity of Williford Spring, where Econfina Creek is relatively narrow and shallow. An allowable flow reduction of 92 cfs, associated with a baseline flow of 419.78 cfs was determined for safe boat passage based on this critical transect. Safe canoe/kayak passage and safe fish passage were achieved under all modeled flow scenarios evaluated throughout the study area. Bankfull conditions were never achieved at transect 7624 (closest to Econfina Creek @ CR 388 gauge location) for any flow scenario evaluated based on the bankfull profile analysis (Section 6.2).

The proposed hydrologic regime for Econfina Creek would shift the baseline flow duration curve downward by the most limiting allowable flow reduction of 51 cfs, across the range of baseline flows for Econfina Creek @ CR 388 gauge. Setting a single minimum flow at the average daily baseline flow for Econfina Creek @ CR 388 gauge provides for adequate protection of middle Econfina Creek including Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. The recommended minimum flow is an allowable flow reduction of 51 cfs from the Econfina Creek @ CR 388 gauge average baseline flow of 537 cfs. This translates to an allowable reduction of 9.5 percent of average baseline middle Econfina Creek flow (Table E.3 below).

Table E-2. Summary of WRV Metrics and Allowable Flow Reductions at the Econfina CR 388 Gauge

Indicator	WRV Assessment Method	Critical Flow (cfs, flow percentile)	Adjusted Baseline Time Series Flow (cfs, flow percentile)	Allowable Flow Reduction (cfs, percent reduction)
Safe power boating passage	Percent of time achieved	327.78 (3)	419.78 (17.6)	92 (21.92)
Safe canoe/kayak passage	Percent of time achieved	<i>Limiting depth never achieved in study area</i>		
Safe fish passage	Percent of time achieved	<i>Limiting depth never achieved in study area</i>		
Instream habitat (SEFA)	SEFA/ maximum area weighted suitability	362 (7)	311 (1.4)	51 (16.4)
Bankfull flow/out of bank flow	Weighted wetted perimeter top of bank inflection point, above HEC-RAS transect 6361	708.78 (90)	639.8 (83)	69 (10.78)
Bankfull flow/out of bank flow	Weighted wetted perimeter top of bank inflection point, below HEC-RAS transect 6361	483.78 (40)	327.8 (3)	156 (47.59)
Bankfull flow/out of bank flow	Percent of time bankfull flows achieved	<i>Bankfull conditions never achieved at transect 7624 (closest to Econfina Creek @ CR 388 gauge location)</i>		

Table E-3. Proposed Combined Minimum Flow for Middle Econfina Creek, Inclusive of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group

System	Average Baseline Flow at Reference Gauge*	Allowable Flow Reduction at Reference Gauge*	Allowable Percent Flow Reduction from Average Baseline Flow
Middle Econfina Creek (Inclusive of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group)	537 cfs (347 mgd)	51 cfs (33 mgd)	9.5%

*Reference gauge is USGS station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)

1 Introduction

This report provides the technical analysis for determining recommended minimum flows for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. The Gainer Spring Group is a first magnitude spring (>100 cubic feet per second, cfs); Williford and Sylvan Spring Groups are second magnitude spring groups (between 10 cfs and 100 cfs). These spring groups are located along the middle portion of Econfina Creek in Washington and Bay counties, Florida and collectively comprise approximately 42% of total flow to Econfina Creek as measured at USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) (Figure 1-1). This assessment focuses on determining the threshold at which consumptive withdrawals would cause significant harm to ecology and water resources of the area.

Section 1 (Introduction) of this report describes the objective, background, and requirements for establishing minimum flows, as well as a description of the study area. Section 2 (Econfina Creek and Watershed) presents a detailed description of the physical setting and contribution zone for Econfina Creek as well as Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. Section 3 (Hydrology) presents a detailed evaluation of hydrological characteristics of Econfina Creek and its springs as well as a summary of the District's hydrologic data collection along Econfina Creek. Section 4 (Water Resource Values) describes the 10 water resource values defined in Rule 62-40.473, Florida Administrative Code, as they relate to this MFL evaluation, and the associated metrics used to quantify the potential effects of reduced spring flows. Section 5 (Hydrologic Models) describes the development of hydrologic models utilized to evaluate water resource value metrics and determine minimum flows. Section 6 (Evaluation of Water Resource Values) provides the evaluation of the applicable water resource value metrics utilizing hydrologic models to quantify the effects of potential spring flow reductions. Section 7 (Summary and Recommended Minimum Flows) provides the recommended minimum flow regimes for middle Econfina Creek, including the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. Section 8 (Adaptive Management) describes the District's ongoing and future efforts to assess and protect Econfina Creek and its springs.

1.1 Objective

The objective of this report is to determine recommended minimum flows for middle Econfina Creek, inclusive of spring discharge at the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, to ensure protection of aquatic habitats, recreation, and other water resource values from significant harm associated with consumptive uses.

1.2 Background

The Northwest Florida Water Management District (District) is required to establish minimum flows and minimum water levels (MFLs) for specific waterbodies located within its boundaries (Section 373.042, Florida Statutes). A map of the District's priority waterbodies for MFL establishment and MFLs previously established can be found on the District's website (www.nwfwater.com). Section 373.042 (1), Florida Statutes, says, "The minimum flow for a given water body is defined as the limit at which further withdrawals would be significantly harmful to the water resources or ecology of the area." As such, this minimum flow evaluation focuses solely on the effects of reduced spring flows from surface water and

groundwater extraction to the ecology of the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group as well as the spring runs associated with these springs and the portion of Econfina Creek influenced by spring flow from these springs. Minimum flows are not intended to offset the effects of sea level rise, changes in precipitation patterns, changes in river hydraulics, or changes in water quality not related to withdrawal impacts.

Section 373.042 (1), Florida Statutes, specifies MFLs are to be established using the “best available information.” The best available information was utilized for establishment of MFLs for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, including data collected specifically for development of these MFLs. Although not required by statute, the District collected extensive hydrologic and bathymetric data along Econfina Creek and its springs in support of the establishment of MFLs for this system.

In accordance with Rule 62-40.473, Florida Administrative Code, and Section 373.0421, Florida Statutes, the District must consider natural seasonal fluctuations in water flows or levels, non-consumptive uses, structural alterations, and multiple environmental values (referred to as water resource values or WRVs, Table 1-1) when developing the minimum flows. Detailed descriptions of the WRVs and their relevance to middle Econfina Creek and the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group are provided in Section 4.

Water management districts are required to develop and implement either a recovery or prevention strategy at the time of rule adoption if the system is currently not meeting or projected to not meet applicable minimum flows. A recovery strategy is required when a system is currently not meeting MFL criteria, while a prevention strategy is required if the MFL is expected to not be met during the following 20 years based on projected withdrawals. Prevention/recovery strategies may include water conservation measures and additional water supply or water resource development projects.

Table 1-1. Environmental Values (62-40.473, Florida Administrative Code)

Water Resource Value	Description
WRV 1	Recreation In and On the Water
WRV 2	Fish and Wildlife Habitats and the Passage of Fish
WRV 3	Estuarine Resources
WRV 4	Transfer of Detrital Material
WRV 5	Maintenance of Freshwater Storage and Supply
WRV 6	Aesthetic and Scenic Attributes
WRV 7	Filtration and Absorption of Nutrients and Other Pollutants
WRV 8	Sediment Loads
WRV 9	Water Quality
WRV 10	Navigation

1.3 Conceptual Approach

The development of minimum flows for middle Econfina Creek, inclusive of the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, builds upon methods applied elsewhere in Florida, as well as for minimum flows established for St. Marks River Rise and Wakulla and Sally Ward springs by the District. The District's approach toward establishing MFLs for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group is that a hydrologic regime exists such that the system's water resource values are protected from significant harm caused from water withdrawals. The approach is based on quantifiable relationships between spring discharge and multiple physical and ecological features related to specific water resource values (WRVs). Rule 62-40.473, Florida Administrative Code, outlines requirements regarding specific WRVs which must be considered in setting MFLs (Table 1-1). Additional details regarding WRVs and metric selection are provided in Section 4.

Similar to MFLs established elsewhere in Florida, the District assessed each WRV. Multiple WRVs were considered and evaluated based on the relevancy to the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group and the Econfina Creek system, the potential to be adversely affected by reductions in spring flow, and whether there are measurable and quantifiable relationships that can be used to develop spring flow thresholds for significant harm. These WRVs in relation to the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group and the Econfina Creek system are described in detail in Section 4.

The results from the evaluation of multiple WRV metrics were used to determine the recommended minimum flows for middle Econfina Creek, inclusive of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. Although significant harm is not specifically defined in statute, an allowable 15-percent reduction in WRV metrics has been implemented as the protection standard for multiple MFLs throughout Florida. This threshold for significant harm was first proposed by Gore et al. (2002) during their review of the upper Peace River MFL report (SWFWMD 2002). The peer review panel wrote, "In general, instream flow analysts consider a loss of more than 15 percent habitat, as compared to undisturbed or current conditions, to be a significant impact on that population or assemblage." This threshold for significant harm has been subsequently utilized and accepted by more than a dozen MFL peer review panels in the establishment of MFLs for springs and rivers (Munson and Delfino 2007, NFWFMD 2021, NFWFMD 2019, SJRWMD 2017, SRWMD 2005, SRWMD 2007, SRWMD 2013, SRWMD 2015, SRWMD 2016a, SRWMD 2016b, SRWMD 2021, SWFWMD 2008, SWFWMD 2010, SWFWMD 2011, SWFWMD 2012a, SWFWMD 2012b, SWFWMD 2017a, SWFWMD 2017b). The 15-percent threshold is also used in this assessment, recognizing that additional data collection and long-term research to confirm or refine this threshold for MFL assessments in Florida would be beneficial. The implementation of the MFL will follow an adaptive management approach, with MFLs periodically reviewed and reevaluated by the District to reflect new data and information as needed. As new data and information are developed regarding the definition of or threshold for significant harm, the District will consider this information in future MFL re-evaluations.

To establish minimum flows, a detailed understanding of the hydrology of the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, and the Econfina Creek system is required to quantify

effects of spring flow reduction scenarios. Models developed to assess changes in WRV metrics associated with reduced spring discharge include a Hydrologic Engineering Centers River Analysis System (HEC-RAS) model to simulate changes in river depth/inundation in response to changes in flow and a System for Environmental Flow Analysis (SEFA) model to evaluate in-stream habitat suitability for classes of species based on relationships among depth, substrate, and stream velocity. These tools are well-vetted and have been applied across a wide range of conditions and places to establish MFLs in Florida (NFWFMD 2021, NFWFMD 2019, SRWMD 2021, SRWMD 2016b).

1.4 Study Area

The study area for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group MFL evaluation encompasses the 11.8-mile portion of Econfina Creek between the Williford Spring Group and Deer Point Lake at the confluence of Econfina Creek and Bear Creek as well as all spring runs associated with these spring groups (Figure 1-1). The Gainer Spring Group is one of five first magnitude springs located within the District and is designated by the State of Florida as an Outstanding Florida Spring (OFS). Williford Spring Group and Sylvan Spring Group are second magnitude springs located on District-owned land within the Econfina Creek Water Management Area. The portion of Econfina Creek north of the Williford Spring run is not directly influenced by the three spring groups of interest and therefore was excluded from the study area. Likewise, the portion of Deer Point Lake below Bear Creek was excluded as the influence of spring flow on total Econfina Creek flow diminishes below CR 388 due to inputs from several surface water tributaries in the vicinity. Future MFL evaluations may consider portions of Econfina Creek above Williford Spring Group, including the remaining second magnitude springs along Econfina Creek.

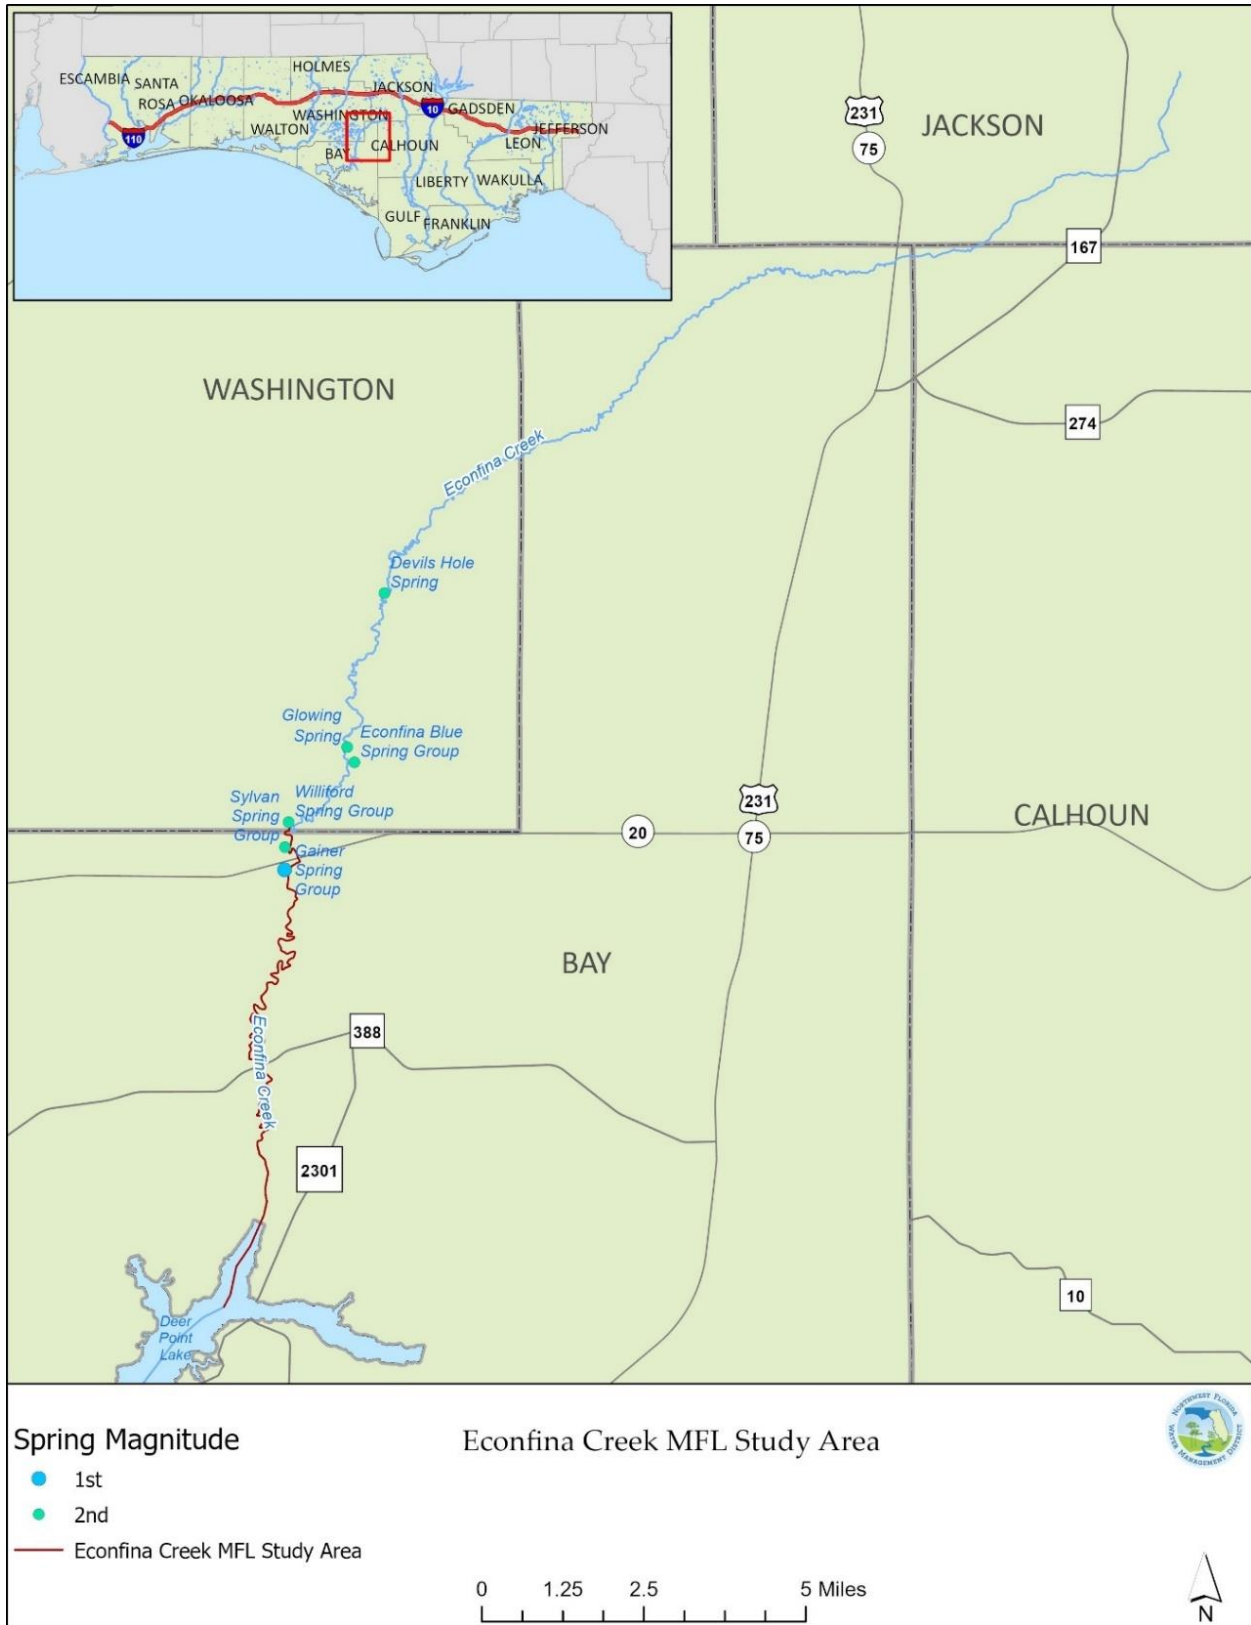


Figure 1-1. Middle Econfina Creek and Springs MFL Study Area

2 Econfina Creek and Watershed

This section presents a detailed physical description of middle Econfina Creek as well as Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group.

2.1 Econfina Creek and Watershed

The Econfina Creek watershed is approximately 188 square miles and is located in the central portion of the Florida Panhandle (Figure 2-1). The watershed lies primarily in Washington and Bay counties with smaller portions in Jackson and Calhoun counties. The Econfina Creek watershed is a sub basin within the Deer Point Lake watershed providing the majority of freshwater inflows to the Deer Point Lake Reservoir, which is the primary water supply for Bay County. Econfina Creek originates in southwestern Jackson County, deriving much of its flow in the upper portion of the creek from surface water runoff including flow from intermittent tributaries such as Buckhorn Creek and Sweetwater Creek in northern Bay County. In its upper reaches, Econfina Creek resembles blackwater creeks typical of the western Florida Panhandle defined by dark tea colored water from tannins released from decayed organic matter.

Econfina Creek continues southwest into eastern Washington County, where much of the inflow is derived from groundwater discharge due to the karst nature of the geology in the region (described further in Sections 2.3, and 2.4). In this area, the creek is incised into the Floridan aquifer, resulting in formation of numerous springs along the creek. Barrios and Chelette (2004) identified 11 springs or spring groups with more than 36 individual vents within the middle portion of Econfina Creek. These springs are concentrated in a relatively small portion of the creek, between the area 0.75 miles north of Walsingham Bridge to 0.5 miles south of SR 20. The largest spring group located along Econfina Creek is Gainer Spring Group, a first magnitude spring group consisting of at least 15 individual spring vents located just south of SR 20 as well as the Bay-Washington County line. In addition, five second magnitude springs or spring groups discharge to Econfina Creek, including Williford Spring Group and Sylvan Spring Group which are located just north of SR 20. (Barrios and Chelette 2004). Detailed descriptions of springs and spring groups along Econfina Creek are provided in Section 2.2.

Below the Gainer Spring Group, Econfina Creek is characterized by steep limestone outcrops and a meandering flow path. Further south approaching CR 388, limestone outcrops give way to more expansive wetlands and a wider channel. Several small intermittent surface water drainage features are present in the vicinity near CR 388, which contribute surface runoff during storm events.

For the most part, the Econfina Creek drainage basin lies within an area of excessively well-drained deep sandy soils (Richards 1997). Due to sandy soils in the region, baseflow derived primarily from spring discharge in the middle reaches of Econfina Creek accounts for the majority of flow in Econfina Creek under low- to moderate-flow conditions. Average estimated baseflow at USGS 2359500 Econfina Creek Nr Bennett (CR 388) is 445 cfs, which represents 83% of the long-term average flow of 536 cfs (10/1/1935-10/14/2023). Small intermittent streams, including Cat Creek and Moccasin Creek located north of CR 388, contribute surface water runoff during high-flow periods. Other inputs contributing to Econfina Creek flow may include diffuse groundwater inflow into the creek channel and seepage springs.

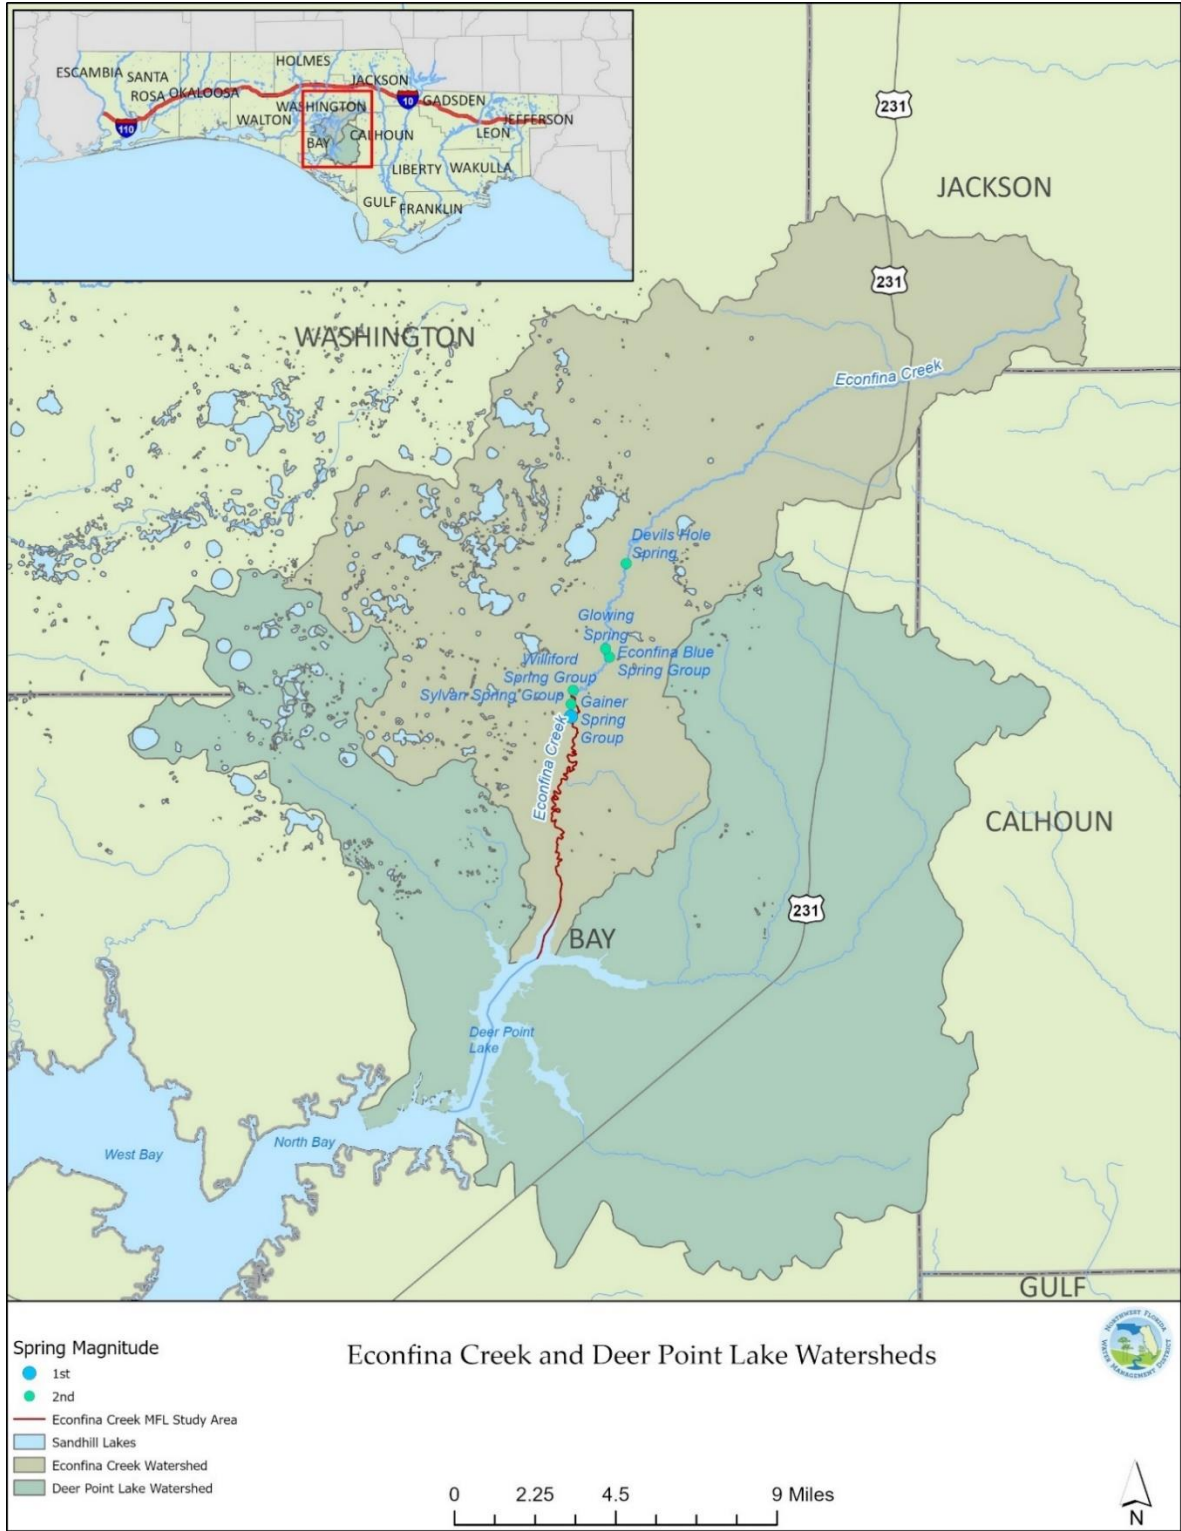


Figure 2-1. Econfinia Creek and Deer Point Lake Watersheds

2.2 Econfina Creek Springs

Based on a springs inventory conducted by the District in 2004 (Barrios and Chelette 2004), a total of 11 springs or spring groups, comprised of more than 36 vents, were identified in the Econfina Creek basin (Figure 2-2). These springs are concentrated in the middle portion of Econfina Creek, approximately 0.75 miles north of Walsingham Bridge to 0.5 miles south of SR 20 (Barrios and Chelette 2004). Some springs, such as Deep Spring in Bay County were determined to be surficial aquifer discharge points instead of Floridan Aquifer springs and were not included in the inventory. Springs in the Econfina Creek basin include those with typical fissure-type vents as well as seepage springs which discharge laterally at or near the surface level of the creek.

The largest spring group located along Econfina Creek is Gainer Spring Group, a first magnitude spring group consisting of at least 15 individual spring vents located just south of SR 20 as well as the Bay-Washington County line. In addition, five second magnitude springs discharge to Econfina Creek, including Williford Spring Group and Sylvan Spring Group which are located just north of SR 20. (Barrios and Chelette 2004). These springs are described in detail in the following sections, based primarily on the springs inventory by Barrios and Chelette 2004, as well as a reconnaissance trip conducted by District staff on June 15, 2021.



Figure 2-2. Locations of Gainer Spring Group, Willford Spring Group, and Sylvan Spring Group

2.2.1 Gainer Spring Group

The Gainer Spring Group is a first magnitude spring group consisting of at least 15 individual spring vents located just south of SR 20 as well as the Bay-Washington County line (Figure 2-3). Average period of record discharge for the Gainer Spring Group composite is 165 cfs. The Gainer Springs #1 run is located on the east side of Econfina Creek, entering the creek across from Gainer Spring #2 (Emerald Spring). The Gainer Springs #1 run consists of eight individual spring vents located within 0.29 miles from the confluence of Econfina Creek. Spring vents located along the Gainer Springs #1 run vary from small vents with no noticeable surface boil to larger vents up to 25 feet across with noticeable surface boils. The largest vent along the Gainer Springs #1 run is Gainer Spring #1C, known locally as McCormick Spring, located approximately 0.17 miles up the shallow spring run. This sizable, sandy vent is imbedded in the bottom of a pool approximately 25 feet wide (Figure 2-4a). A gentle surface boil is evident as observed by District staff on June 15, 2021, and multiple other occasions and there is a continual plume of sediment moving in the pool. Maximum depth measured in the vent is 11.5 feet.

The largest vent within the Gainer Spring Group, known as Emerald Spring locally and as Gainer Spring #2 officially, is a crevice at the base of a 25-foot limestone bluff on the west side of the creek (Figure 2-4b). This vent is approximately 0.4 miles south of the SR 20 bridge across from the Gainer Springs #1 run. The cove is approximately 30 feet in diameter with a maximum depth of approximately 12 feet. There is a strong continuous boil at this vent as observed by District staff on June 15, 2021, and multiple other occasions and a crevice in the limestone bluff to the north of the main vent which also discharges groundwater.


Gainer Spring #3 is located along a relatively wide spring run on the west side of the creek just above Gainer Spring #2 and the Gainer Spring #1 run (Figure 2-4c). The run turns north and parallels the creek for 400 feet. The spring pool is located at the head of the spring run, approximately 250 feet in diameter with a small, man-made beach to the north and a small island in the center. There are several vents opening in the bottom, near the edges of the pool. Several of the vents have a surface boil as observed by District staff on June 15, 2021, and multiple other occasions. The maximum depth measured in one of the vents is 11 feet. The vent is on private land and the spring is used for recreation.



Figure 2-3. Gainer Spring Group Vent Locations



A)

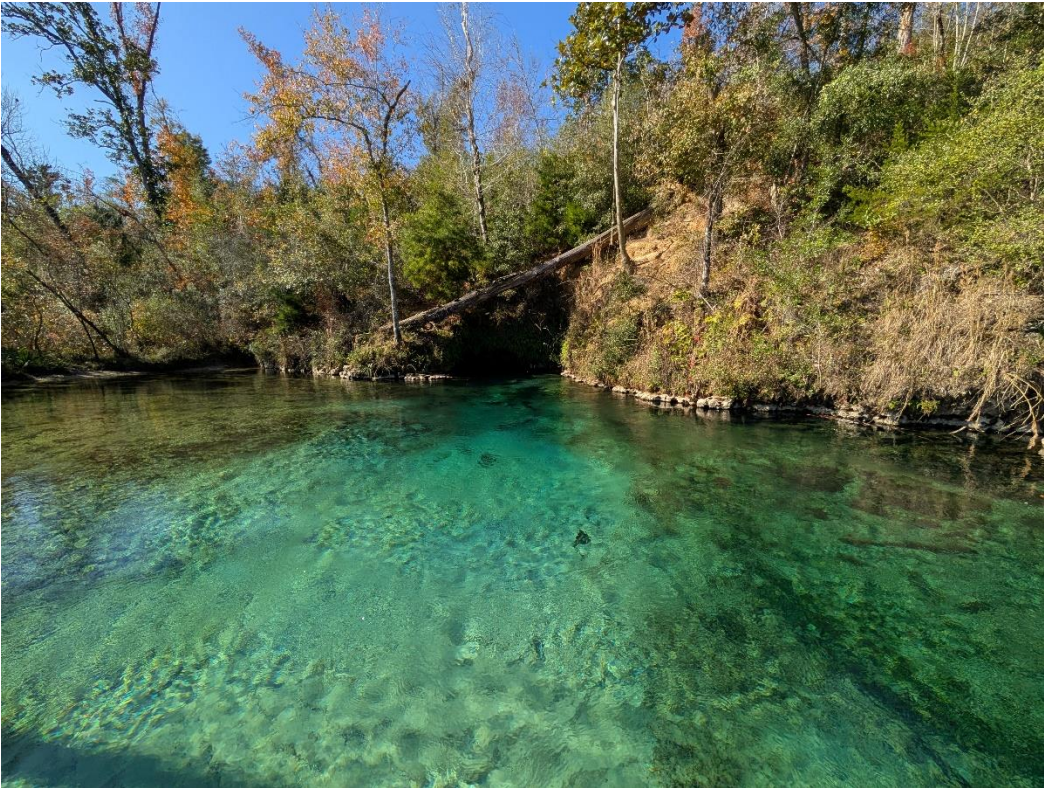

B)



Figure 2-4. Gainer Spring Group **A)** #1C McCormick Spring **B)** #2 (Emerald Spring) **C)** #3

2.2.2 Williford Spring Group

Williford Spring Group is located north of the SR 20 bridge, just north of the Bay/Washington county line, and is a popular recreation area (Figure 2-5, Figure 2-6). Average period of record discharge for Williford Spring Group is 42 cfs. Williford Spring Group's primary vent is a single large vent at the head of its run with a noticeable surface boil as observed by District staff on June 15, 2021, and multiple other occasions. Several smaller vents additionally contribute their discharge to the 450 ft spring run before it enters Econfina Creek. The primary spring vent emerges from beneath a submerged limestone ledge into a 40-foot diameter pool. Maximum depth measured at the vent is 12 feet, but the conduit extends further and downward. The District completed a \$2.1 million restoration project for Williford Spring in 2015. In 2018, Hurricane Michael caused substantial damage to Williford Spring and the surrounding area, resulting in temporary closure of the District-owned recreation area at the spring. The recreation area has been reopened to the public, however efforts to repair damaged recreation structures and remove debris continue as of the time of this report's preparation.



Figure 2-5. Williford Spring Group Vent Locations



Figure 2-6. Williford Spring (Photo taken prior to impacts associated with Hurricane Michael on October 10, 2018).

2.2.3 Sylvan Spring Group

Sylvan Spring Group is located on the western side of Econfinia Creek, north of the SR 20 bridge, just south of Williford Spring Group and is also a popular recreation area (Figure 2-7). Average period of record discharge for Sylvan Spring Group is 18 cfs. Sylvan Spring Group consists primarily of a collection of fissure type spring vents in three locations along its spring run. Groundwater discharges from Sylvan Spring #1 laterally from a series of fissures in the limestone bank and from several vents in the bottom of the pool (Figure 2-8). Three prominent surface boils are apparent in the 50-foot diameter pool. The pool lies at the head of a short 400-foot spring run. Maximum depth in the largest vent is 3.8 feet. Groundwater discharges from Sylvan Spring #2 laterally from a maze of fissures in a collapsed limestone outcrop and from a number of sand boils. The vents combine in a 30-foot diameter pool before flowing 800 feet to converge with the Sylvan main run. Maximum depth in the pool is 0.6 foot. Groundwater discharges from Sylvan Spring #3 laterally from two vents beneath a 20-foot limestone bank. The discharge flows into a pool approximately 15 feet across. The spring run from this set of vents flows into the Sylvan Spring #1 pool. Maximum depth in the pool is 1.3 feet.



Figure 2-7. Sylvan Spring Group Vent Locations



Figure 2-8. Sylvan #1

2.3 Physiography

An area of concentrated groundwater discharge to the middle reach of Econfinia Creek that includes the Gainer-Sylvan-Williford group of springs was previously delineated by Richards (1997) and subsequently refined by the District (Chelette and Sutton, 2017, digital communication) and occurs within two, broad geomorphic areas: the Dougherty Karst Plain District and the Apalachicola Delta Geomorphic District (Rupert and Means, 2009). This area extends northwestward into Jackson County, Florida and southwestern Georgia, and is described by Rupert and Means (2009) as "... comprised of a flat-to-gently-rolling, southwestward sloping plain generally characterized by karst terrain." The western and central parts of the Middle Econfinia Creek groundwater contributing area (MEC GWCA) occurs within the southern part of the Vernon Karst Hills Province of the Dougherty Karst Plain Geomorphic District (Rupert and Means, 2009). This area is also known locally as the Sand Hill Lakes area (Richards, 1997) and has a generally flat, karst topography with numerous sinks, closed topographic depressions, and few streams. Of particular note are the numerous sinkhole lakes that occur in the area and sinks that are deeper and steeper-sided than other parts of Washington County (Rupert and Means, 2009). These sinks and sinkhole lakes coincide with the (sometimes coalescing) circular, closed depression features in the area west of

Econfina Creek and within the groundwater contributing area to the middle reach of Econfina Creek that contains the Gainer, Sylvan, and Williford springs groups, as shown in Figure 2-9.

Rupert and Means (2009) described the area east of the Econfina Creek and Gainer-Williford-Silvan Springs complex as being part of the High-Level Deltas and River Terraces province of the Apalachicola Delta Geomorphic District, and described this area as being “... generally characterized by a well-drained, gently rolling topography” with local hills formed by deltaic deposits from the Citronelle Formation.

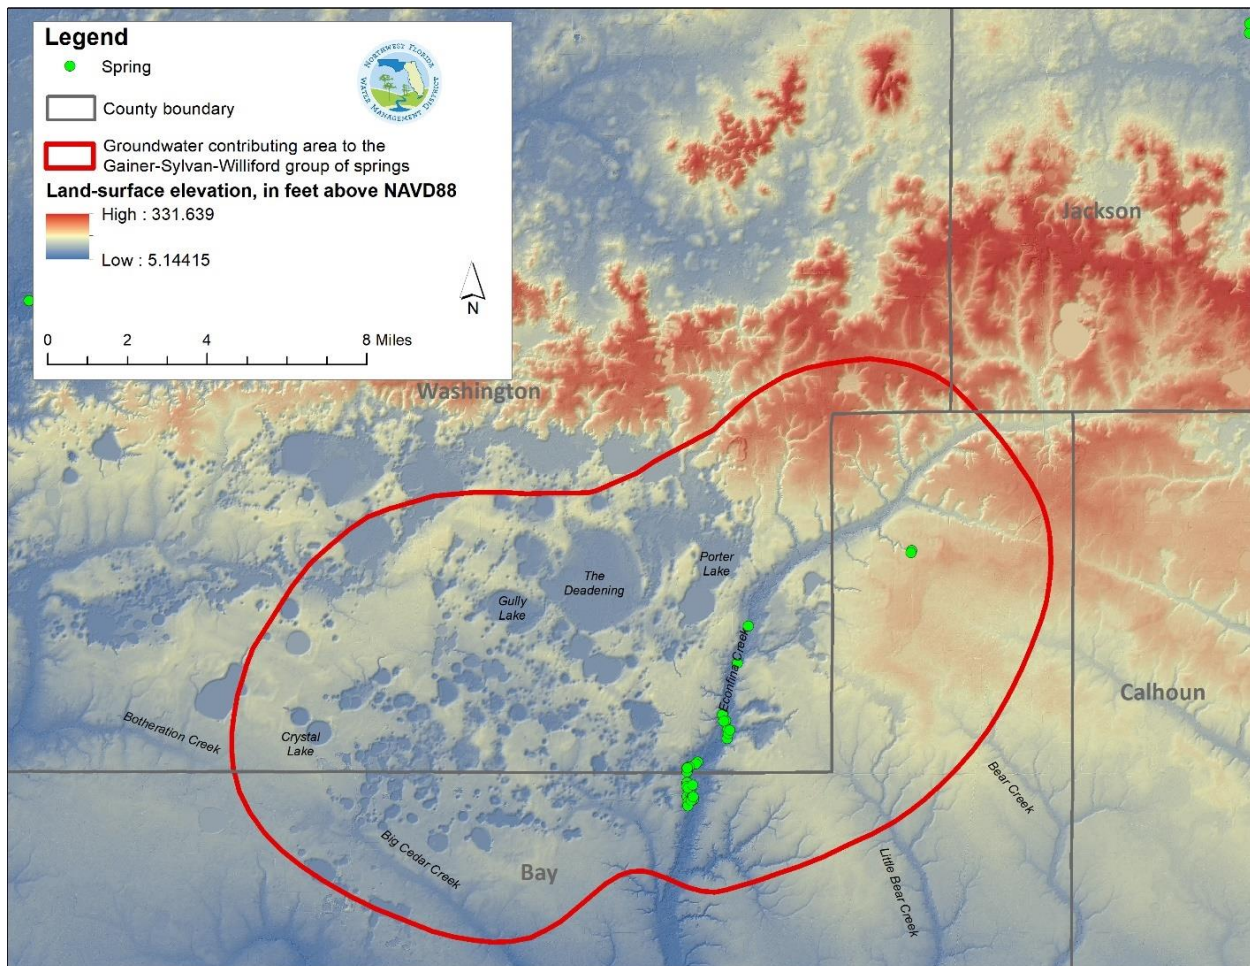


Figure 2-9. Land Surface Elevations Within and Adjacent to the Groundwater Contributing Area to the Middle Reach of Econfina Creek and Associated Springs.

2.4 Hydrogeology

The primary groundwater contribution area for the Middle Econfina Creek and associated springs encompasses approximately 129,000 acres within southern Washington and northern Bay counties (Figure 2-10). The karst topography, closed surface-water drainage basins, and sandy soils in the Sand Hill Lakes part of the contributing area enhance the potential for groundwater recharge, which directly contributes to the spring discharge to Econfina Creek (Richards, 1997). The sandy soils and high recharge rates of the Sand Hill Lakes area also make it highly susceptible to potential surface contamination if not properly protected.

The hydrogeologic units underlying the study area consist of a thick sequence of rocks that constitute the Floridan aquifer system and overlying unconsolidated sediments that constitute (in order of decreasing depth) the upper confining unit of the Floridan aquifer system and the surficial aquifer system. The hydrogeology of the Floridan aquifer system and overlying hydrogeologic units in the study area have been described and mapped in studies by the U.S. Geological Survey (see, for example, Williams and Kunianski, 2016; Miller, 1986), Florida Geological Survey (Campbell, 1993a and 1993b; Rupert and Means, 2009; Schmidt and Wiggs Clark, 1980), and the District (Richards, 1997; Pratt and others, 1996), among others. This section provides a brief description of more detailed information that can be found in these references.

The surficial aquifer system extends from land surface to the top of the upper confining unit of the Floridan aquifer system, and generally consists of sediments of the Citronelle Formation and Pliocene-age portion of the Alum Bluff Group. These sediments can be quite permeable in the Sand Hill Lakes area, where the soils and shallow subsurface consist of excessively-well drained sands. The surficial aquifer system is an unconfined 'water-table' aquifer and is present wherever the depth and permeability of the system are capable of delivering usable quantities of water, although it is not a primary source of water in the study area. The thickness of the surficial aquifer system is generally less than 100 feet thick but ranges in thickness from approximately 0 to 220 feet and thins in a southwest-to-northeast trending direction in the study area (Figure 2-10) based on data published by Williams and Dixon (2015).

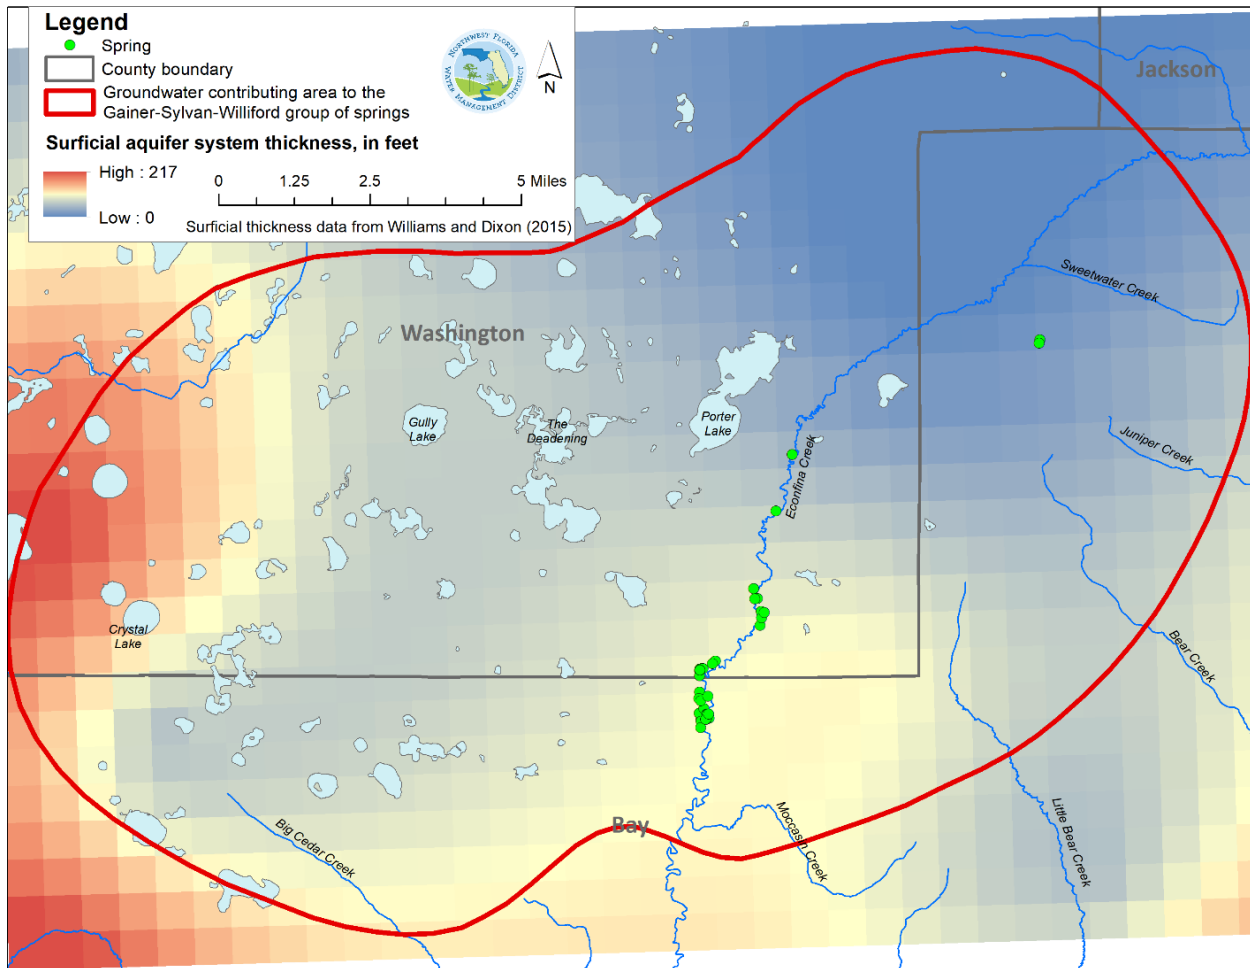


Figure 2-10. Estimated Thickness of The Surficial Aquifer System in the Vicinity of the Contributing Area to The Middle Reach of Econfina Creek and Associated Springs, Based on Data from Williams and Dixon (2015)

As implied by its name, the upper confining unit of the Floridan aquifer system is generally defined by lower-permeability sediments that limit the vertical movement of groundwater to or from the underlying Floridan aquifer system. In Florida, the upper confining unit is typically referred to as the intermediate confining unit/aquifer system. In the study area, this unit consists of clays as noted by Musgrove and others (1965), this confining unit is present throughout the Econfina Creek basin “... except where it has been breached by a collapse into solution chambers or by erosion along Econfina Creek.” The thickness of the upper confining unit ranges from about 0 to 220 feet within and adjacent to the groundwater contributing area to the middle reach of Econfina Creek and associated springs (**Error! Reference source not found.11**).

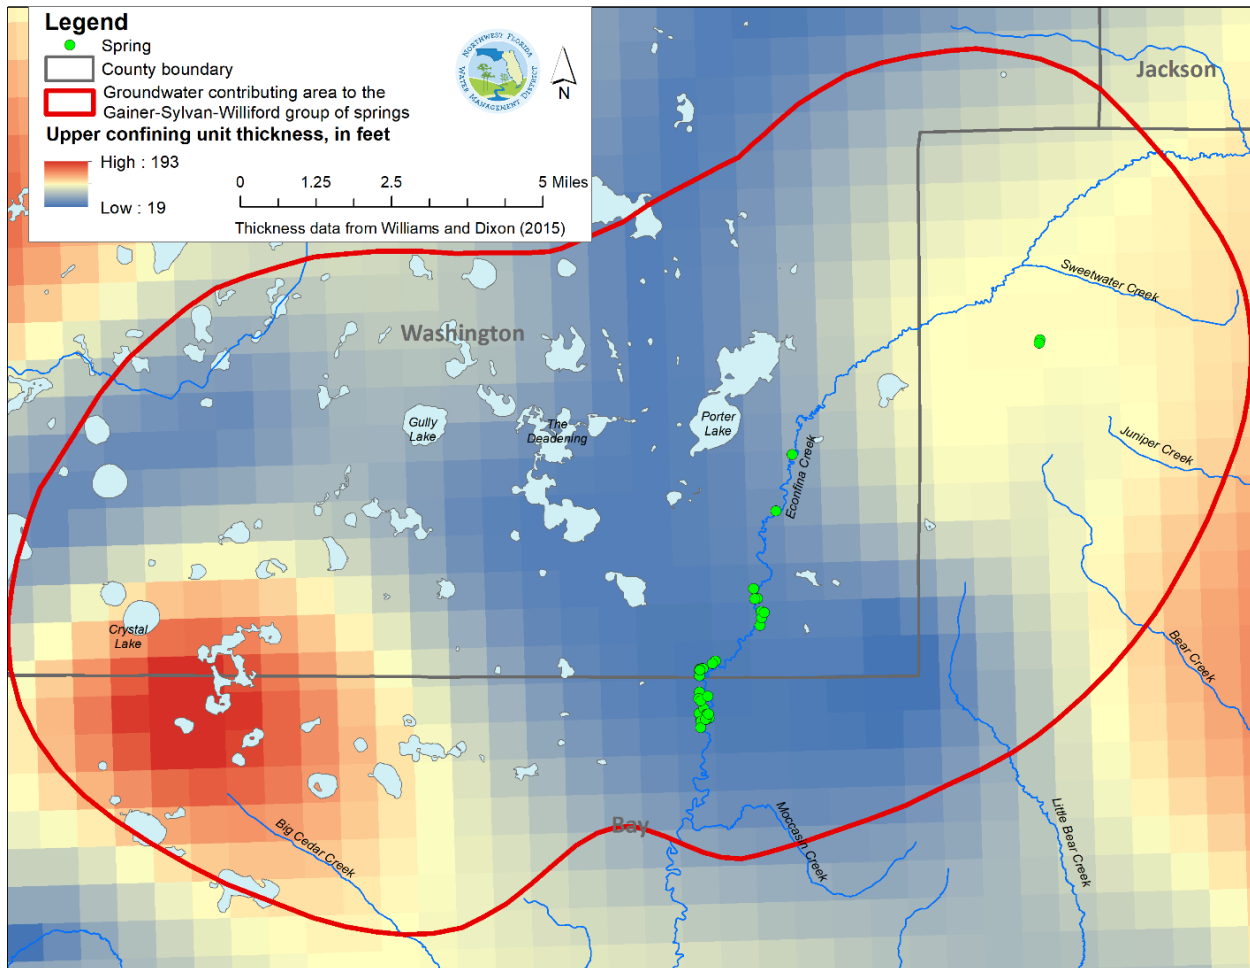


Figure 2-11. Estimated Thickness of the Upper Confining Unit of the Floridan Aquifer System in the Vicinity of the Contributing Area to the Middle Reach of Econfinia Creek And Associated Springs, Based on Data From Williams And Dixon (2015)

The Floridan aquifer system is a thick sequence of permeable carbonate (limestone and dolostone) rocks that underly Florida and parts of Alabama, Georgia, and South Carolina. This aquifer system is highly productive and is the principal water supply for much of the area where it occurs. In many areas the Floridan aquifer system is separated into an Upper and Lower Floridan aquifer by one or more lower permeability zones. Within the study area, the Upper Floridan aquifer is the primary source of drinking water, affects the levels in many of the area lakes, and sustains the flow of Econfinia Creek through concentrated groundwater discharge to springs like Gainer, Sylvan, and Williford spring groups, as well as through more diffuse groundwater discharge to the creek. The thickness of the Upper Floridan aquifer ranges from about 170 to 360 feet in and adjacent to the groundwater contributing area to the Gainer, Sylvan, and Williford springs groups (Figure 2-12).

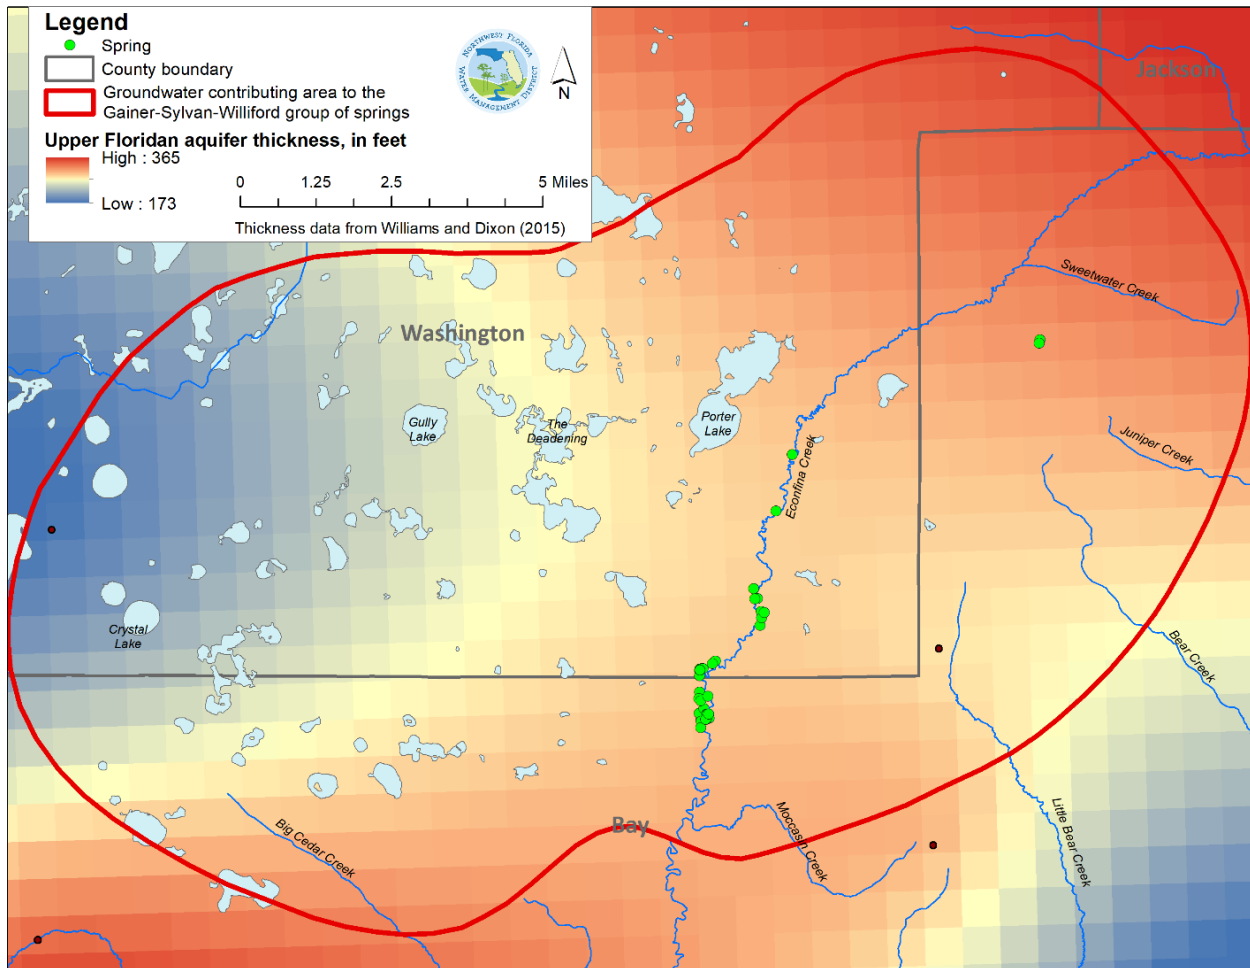


Figure 2-12. Estimated Thickness of the Upper Floridan Aquifer in the Vicinity of the Contributing Area to the Gainer-Sylvan-Williford Group of Springs, Based on Data from Williams and Dixon (2015)

2.5 Land Use, Population and Structural Alterations

The population residing within Bay and Washington counties was 195,339 and 26,094 individuals respectively as of 2020 (NWFWMDC 2023). However, most of the population in the area resides in coastal Bay County including Panama City, which is located outside the Econfina Creek watershed. The population of Bay County is expected to increase to 232,512 by 2045, although much of the anticipated growth in the area is located along the coast, outside the Econfina Creek watershed. The population of Washington County is expected to remain relatively stable, with a projected 2045 population of 28,943. Based on 2020 U.S. Census block data provided by the U.S. Department of Commerce Census Bureau, the population within the middle Econfina Creek groundwater contribution area was 10,041 as of 2020, which is approximately 4.5% of total 2020 population within Bay and Washington counties (U.S. Census Bureau 2022).

Land uses within the Econfina Creek watershed are predominantly natural areas (86.93 percent) including upland forest (56.39 percent), wetlands (20.45 percent), open land (5.80 percent), and open water (4.29 percent) (Table 2-1, Figure 2-13). Agriculture (7.23 percent) and developed areas (5.84 percent) represent

a relatively small portion of land use within the watershed. To protect Econfina Creek and its contribution zone, the District has acquired and currently manages 41,747 acres of public lands in the Econfina Creek Water Management Area, which accounts for approximately 40% of the watershed area (Figure 2-14). This acreage total includes the Sand Hill Lakes Mitigation Bank, also known as the Fitzhugh Carter Tract.

The most significant structural alteration to Econfina Creek is the Deer Point Lake Reservoir, located at the southern terminus of Econfina Creek and Deer Point Lake. (Deer Point Lake Reservoir is described in more detail in Section 2.5.1). Other structural alterations include bridge crossings located at Scott Rd., Walsingham Bridge Rd., SR 20, and CR 388. Bridges located at SR 20 and CR 388 were represented in the HEC-RAS model, described in Chapter 5. Backwater effects from the Deer Point Lake Reservoir were considered as part of this MFL evaluation, described in more detail in Section 2.5.1.

Additionally, the extensive woody debris removal conducted by the Florida Department of Environmental Protection (DEP) following Hurricane Michael likely altered the instream channel substrate and woody habitat in many areas (Section 2.8). Since these efforts were completed, additional woody debris has begun being deposited within the Econfina Creek channel restoring the system to a more natural condition.

Table 2-1. Econfina Creek Watershed Land Use

Land Use Category*	Total Area (mi²)	Percent Watershed Area (%)
Agriculture	11.77	7.23
Developed	9.51	5.84
Open Land	9.44	5.80
Upland Forest	91.83	56.39
Open Water	6.99	4.29
Wetlands	33.30	20.45
Total	162.83	100

*Based on 2019 land use data for NFWFMD (FDEP 2019)

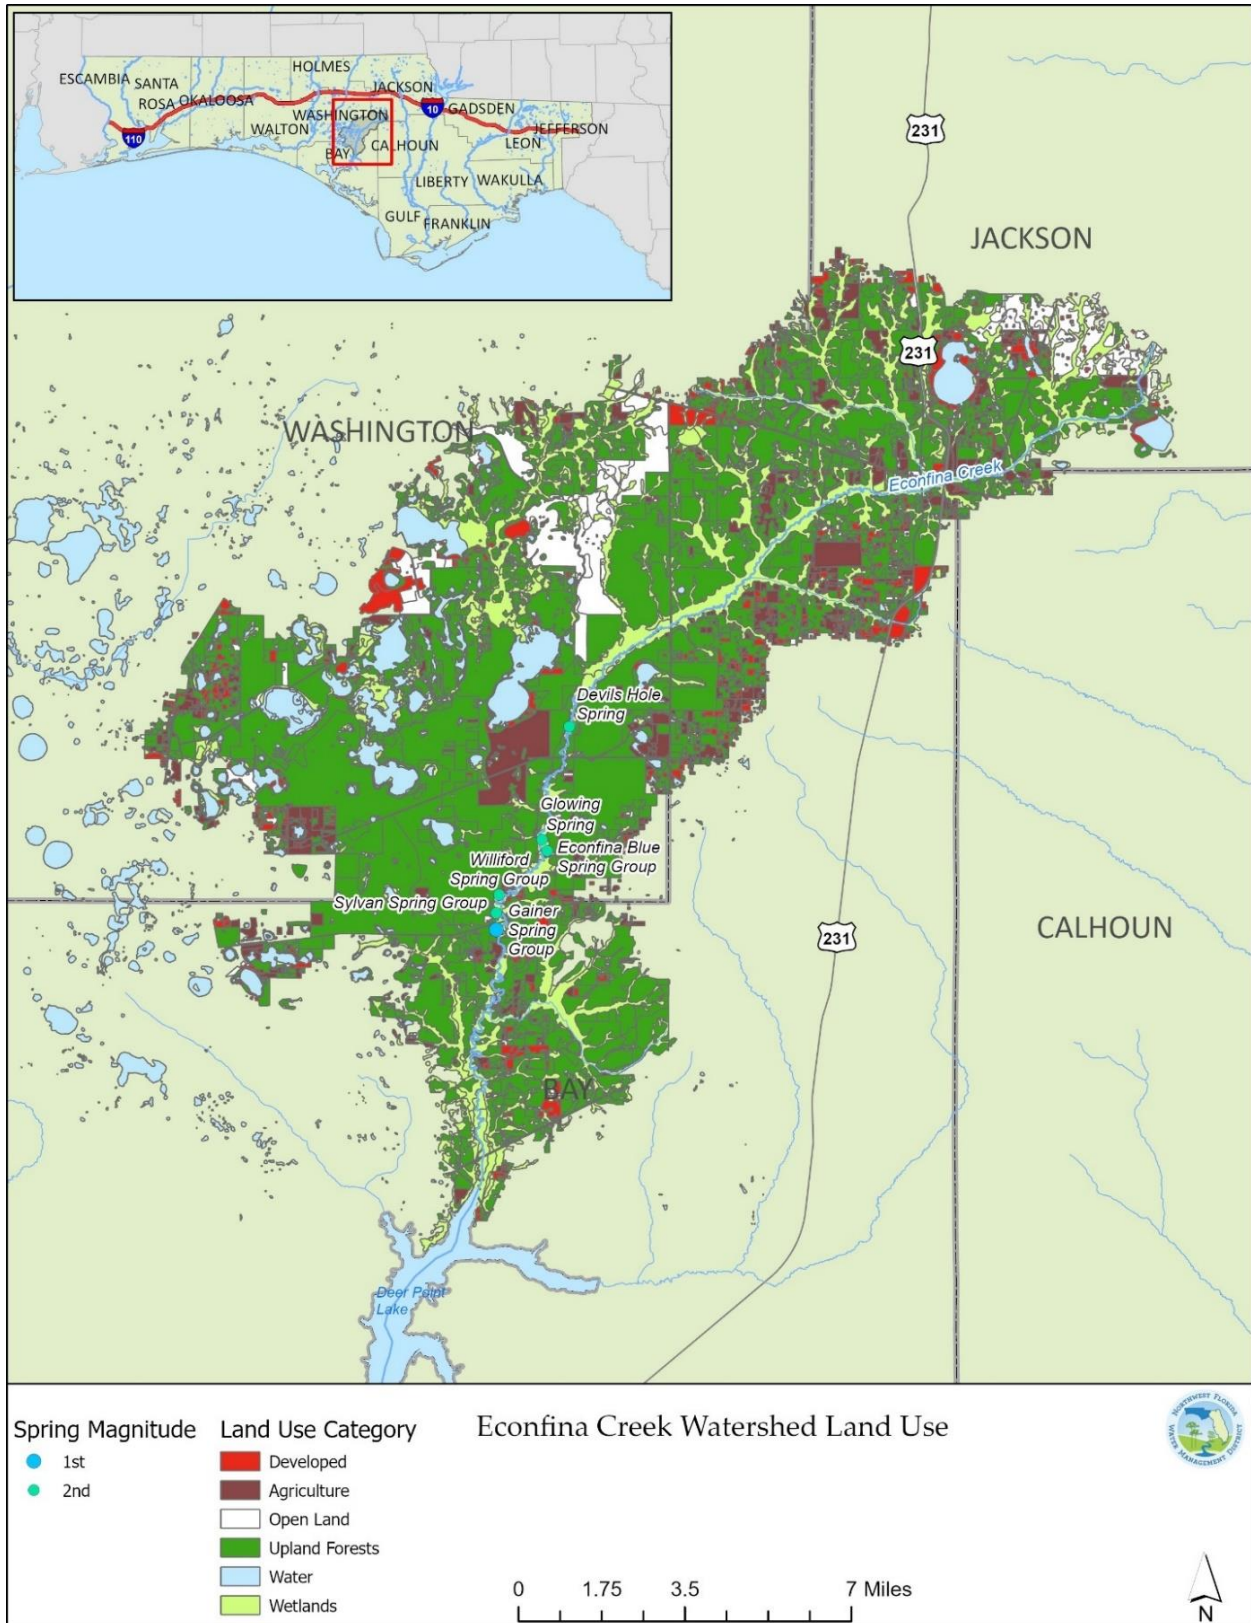


Figure 2-13. Econfina Creek Watershed Land Use (2019 Land Use Data, DEP 2019)

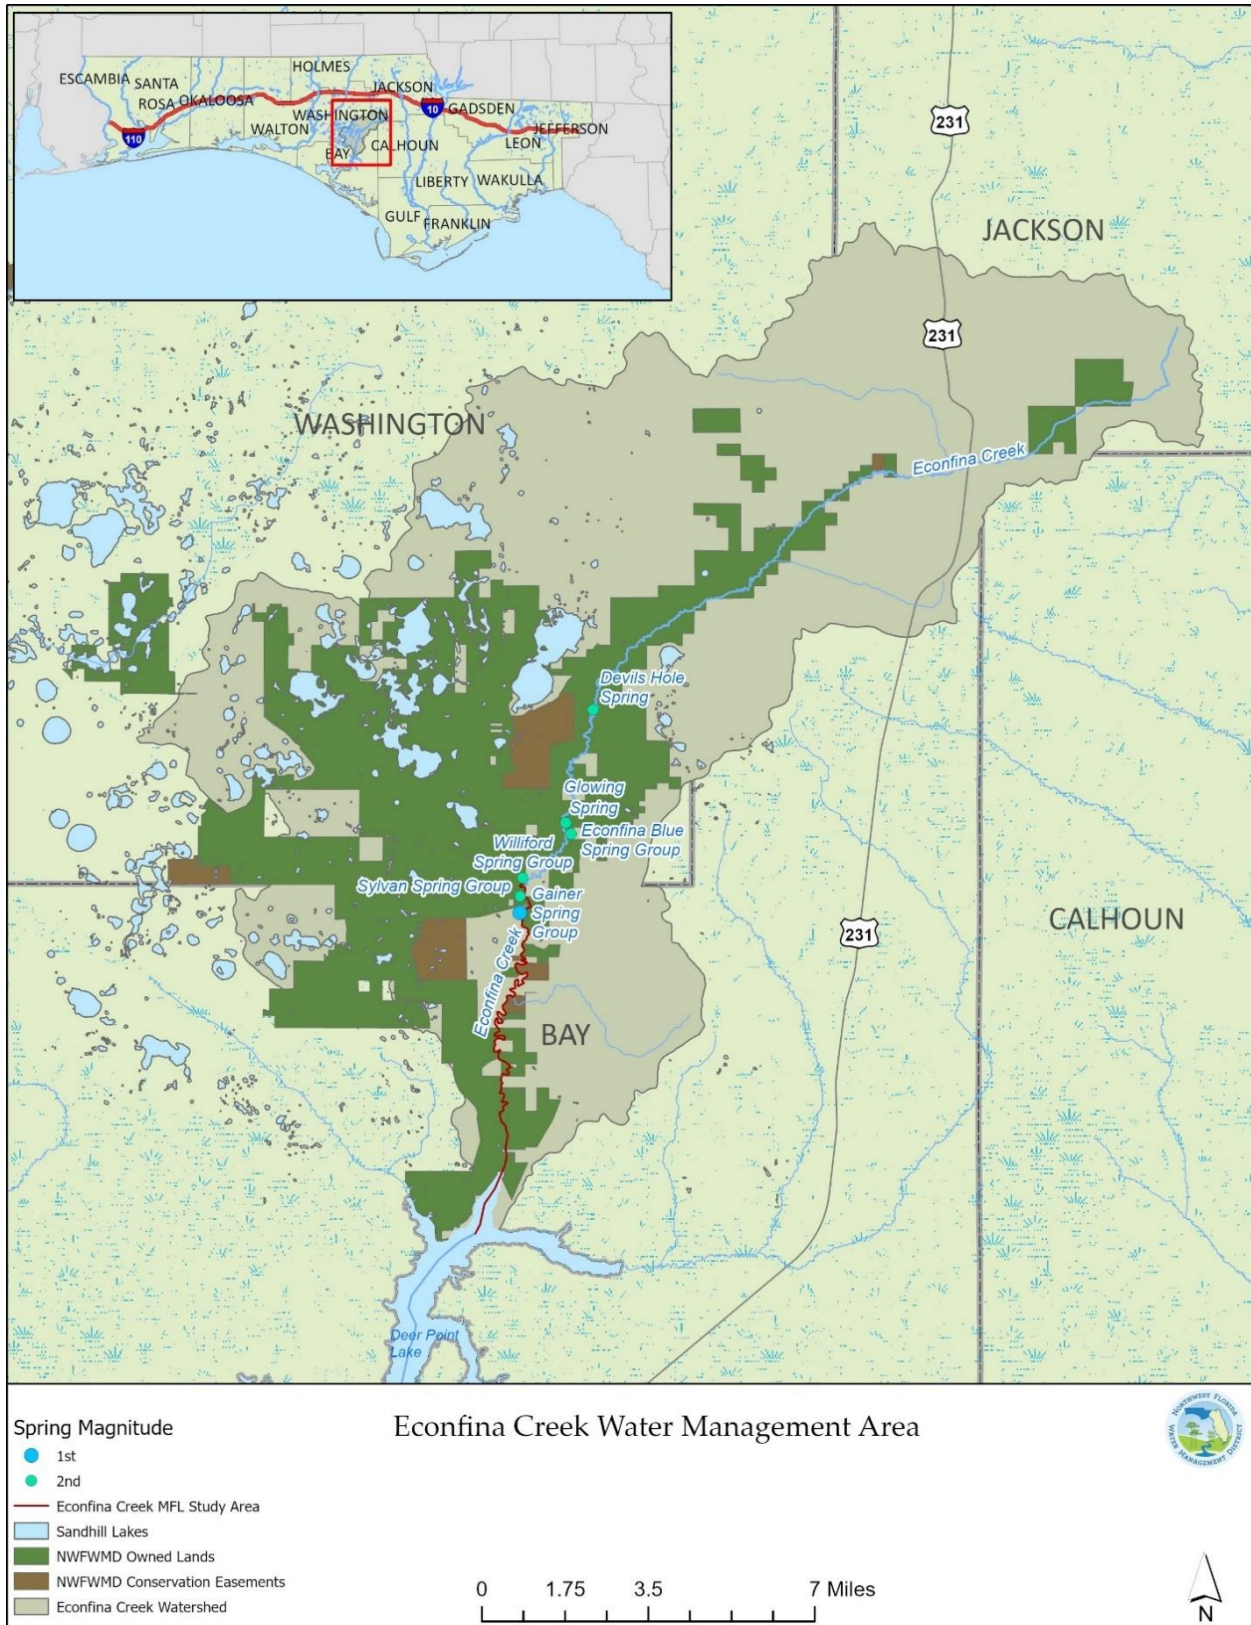


Figure 2-14. Econfinia Creek Water Management Area

2.5.1 Deer Point Lake Reservoir

Deer Point Lake Reservoir is a 5,000-acre impoundment located seven miles north of Panama City in the upper reach of North Bay and is the major source of potable water for Bay County. The reservoir was created in 1961 through construction of a dam across North Bay at Deer Point (NFWWMD 2017). When the dam was constructed, saltwater which naturally occurred in the upper reaches of North Bay was flushed out of the system forming the water supply reservoir and Deer Point Lake. The reservoir receives freshwater flow from Econfina, Bear, and Cedar creeks and Bayou George and discharges water to North Bay. On average, Deer Point Dam discharges approximately 800 cfs (517 mgd), to North Bay (Crowe et al. 2008).

An agreement was established in 1991 between NFWWMD and the Board of County Commissioners of Bay County to set the average and maximum withdrawals of fresh water from the Deer Point Reservoir. The agreement specifies the daily average withdrawal is not to exceed 69.5 mgd and a daily maximum of 82 mgd through 2010. In an extension of the agreement to 2040, the daily average withdrawal is not to exceed 98 mgd, with a maximum daily withdrawal of 107 mgd. The original pump station and intake for Bay County was located at the southern end of Deer Point Lake near the dam. In 2015, construction of an alternative intake, located in the northern end of Deer Point Lake near the terminus of Econfina Creek, was completed to address concerns of the potential for saltwater intrusion from dam overtopping during hurricanes. The surface water intake system and transmission pipeline has a capacity to deliver approximately 30 mgd of raw water to the Bay County Water Treatment Plant.

The water surface elevation of Deer Point Lake is controlled by the Bay County Water Division and was typically held constant between 4.8 and 5.0 ft., NAVD88 prior to July 2015 (Figure 2-15). Since August 2015, lake levels have remained between 4.4 and 4.6 ft., with only brief excursions below or above that range. Bay County commonly drops the lake several feet every winter to facilitate clearing of near-shore submerged vegetation by exposing it to freezing temperatures. Aside from the controlled drawdown events, Deer Point Lake elevation remains relatively constant.

Lake levels from District station 8544 (Deer Point Lake Near Dam) were compared with Econfina Creek stage at USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388), located several miles upstream of Deer Point Lake to determine the extent of backwater effects (Figure 2-15). Visual examination of Figure 2-15 suggests no noticeable effect of lake level fluctuations on stage at Econfina Creek @ CR 388. This lack of effect is particularly noticeable during scheduled lake winter drawdowns where lake levels drop by several feet for several months while stages along Econfina Creek remain stable. This suggests that Econfina Creek stages at CR 388 are controlled predominantly by flow inputs upstream rather than backwater effects caused by Deer Point Lake Reservoir.

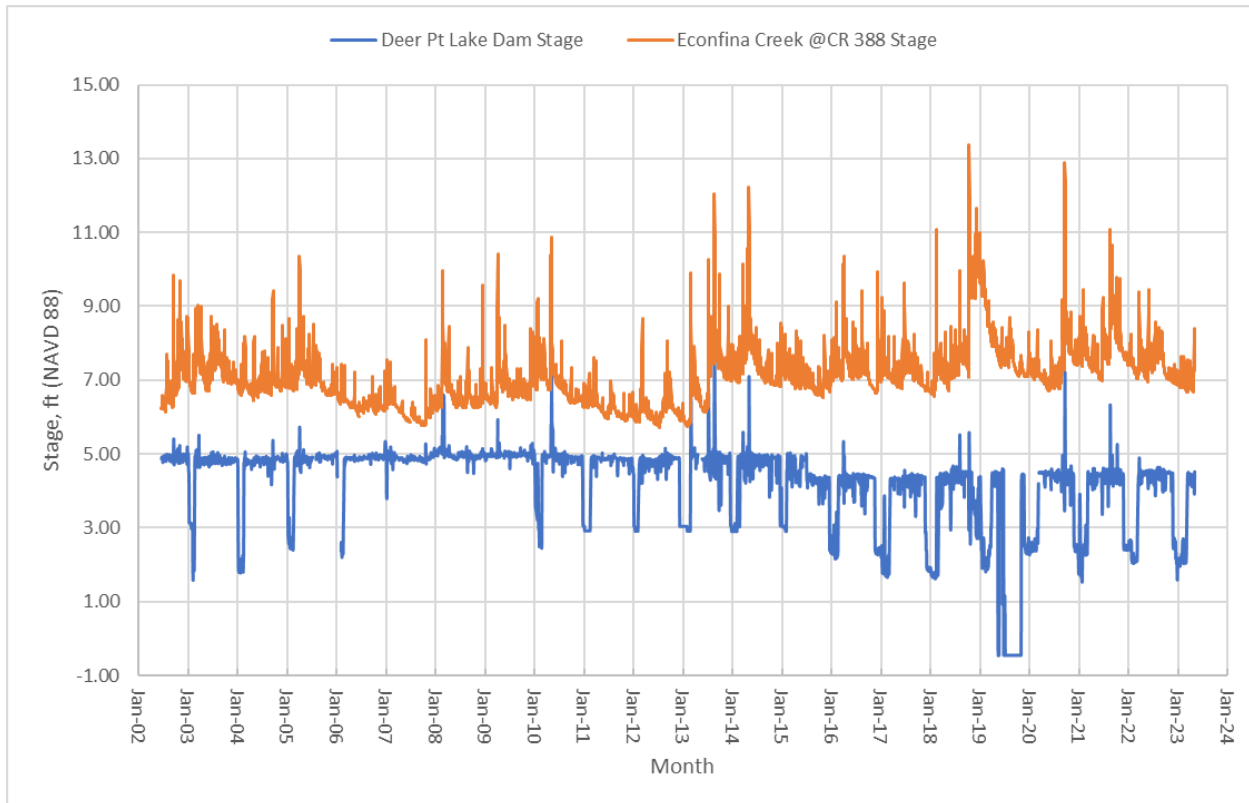


Figure 2-15. Comparison of Deer Point Lake levels with Econfina Creek Stage

2.6 Precipitation

Annual precipitation averaged 59.1 inches at National Weather Service (NWS) station USC00086842 located in Panama City, FL, between 1914 and 2023. Precipitation data from NWS station USW00073805 located at the Northwest Florida Beaches International Airport was utilized for September 2023-December 2023 since data at USC00086842 was unavailable for these months. During the period from 1914-2023, annual precipitation ranged between 35 inches (1968) and 87 inches (2013) (Figure 2-16). Precipitation displays bimodal seasonality with highest mean monthly precipitation occurring during the summer months of July and August (7.8-8.0 inches), along with a smaller peak during March (5.1 inches) (Figure 2-17). Monthly mean precipitation minimums were observed during the months of May (3.1 inches) and October (3.3 inches).

In addition to short-term fluctuations among and within years, the Atlantic Multidecadal Oscillation (AMO) is long-term fluctuation in sea surface temperature that has direct effects on long-term precipitation and temperature patterns in north Florida (NOAA 2020). Northwest Florida tends to receive less rainfall during warm periods and more rainfall during relatively cold periods. Since the mid-1990s the Atlantic has been in a warm period.

To assess periods of above and below average rainfall, the 12-month standard precipitation index (SPI) was computed for the NWS Station USC00086842 located in Panama City, FL and NWS station USW00073805 located at the Northwest Florida Beaches International Airport (Sept 2023-Dec 2023) (Figure 2-18) using the SPI generator available from the National Drought Mitigation Center [Standardized](#)

[Precipitation Index | National Drought Mitigation Center \(unl.edu\)](#). The purpose of this analysis was to characterize periods of drought vs. rainfall surplus in the study area for context in this MFL evaluation. Over long periods of time, the SPI index can be related to groundwater storage in the region, affecting potential baseflow to Econfina Creek and its spring groups. The SPI is calculated from the historical precipitation record, where precipitation accumulation over a specified period of time is compared to that same period of time throughout the historical record at that location. Positive SPI values represent wet conditions; the higher the SPI, the wetter the hydrologic conditions. Negative SPI values represent dry conditions; the lower the SPI, the more unusually dry a period is. A 12-month SPI was utilized to evaluate decadal climatic trends.

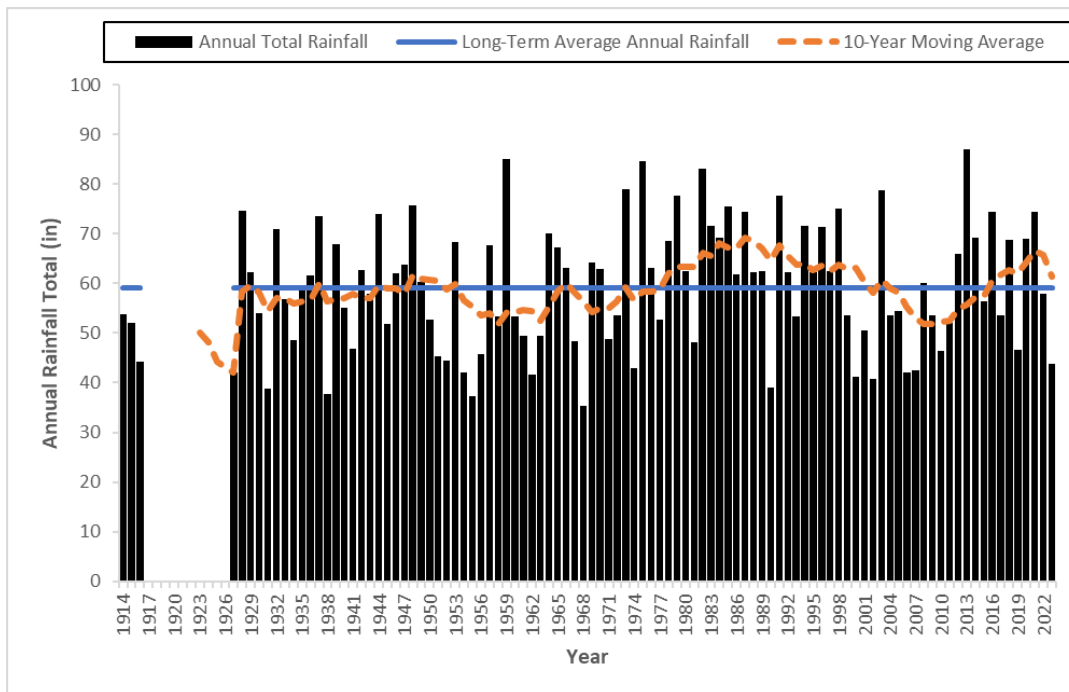


Figure 2-16. Annual Precipitation Totals and Long-Term Annual Average Precipitation for NWS Station USC00086842 Located in Panama City, FL and NWS station USW00073805 Located at the Northwest Florida Beaches International Airport (September 2023 - December 2023)

Figure 2-18 illustrates a period of less precipitation from 1927 to the early 1960's coinciding with a warm AMO, followed by a period of higher precipitation to 1998 coinciding with a cool AMO and again a period of lower precipitation from 1998 through 2013 coinciding with the recent warm AMO. The period of record extending from 1998 through 2013 had only two years with precipitation totals exceeding 59.1 inches at the NWS Panama City station. The 10-year moving average annual precipitation totals show that precipitation has been below the long-term average for much of the 2000s decade. (Figure 2-16). This indicates the area was in a precipitation deficit for an extended period possibly associated with the AMO cycle. However, several years of above average rainfall occurred from 2013-2021 including record rainfall of 87 inches in 2013, resulting in a period of rainfall surplus based on the 10-year moving average rainfall. Recently, 2021 was a wet year with 74.4 inches total, including 20 inches in August 2021 in part due to Tropical Storm Fred.

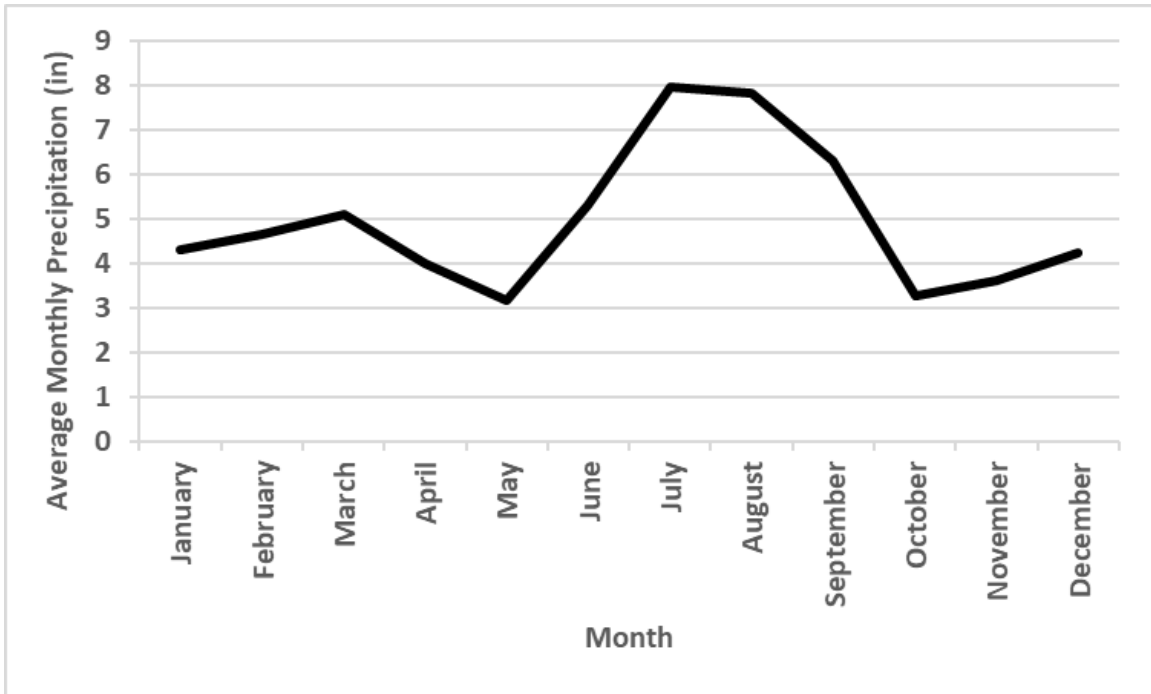


Figure 2-17. Monthly Precipitation Averages for NWS Station USC00086842 Located in Panama City, FL and NWS station USW00073805 located at the Northwest Florida Beaches International Airport (September 2023 - December 2023)

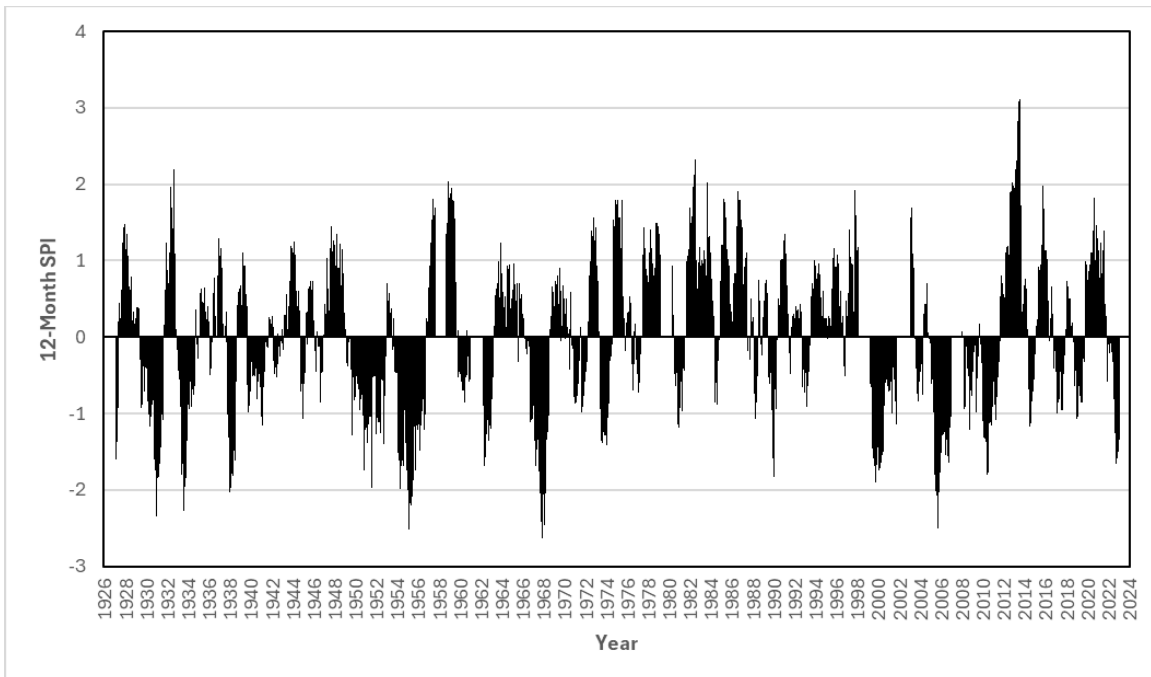


Figure 2-18. Twelve Month Standard Precipitation Index for NWS Station USC00086842 Located in Panama City, FL and NWS station USW00073805 Located at the Northwest Florida Beaches International Airport (September 2023 - December 2023)

2.7 Water Quality

The Econfina Creek watershed is largely undeveloped with little projected growth through 2045. Additionally, the District manages the Econfina Creek Water Management Area protecting most of the recharge area to the Econfina Creek and springs including the Sand Hill Lakes area. Otherwise, in this region, silvicultural activities, landscape erosion, and unpaved roads contribute to nonpoint source pollution within the watershed (NFWFMD 2017).

Water quality data has been collected for Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group as a collaborative effort by the District, DEP, and USGS over the past several decades. Quarterly lab-processed grab samples have been collected for Gainer Spring Group since 2001, with periodic samples taken prior to 2001. Samples are taken at one or more individual vents, with the majority of samples being taken at either Gainer Spring #1C (McCormick Spring) or Gainer Spring #2 (Emerald Spring). Water quality data presented in this report for Gainer Spring Group represent the composite spring group utilizing all available measurements for all vents to represent Gainer Spring Group water quality. Measurements recorded on the same day were averaged to determine the Gainer Spring Group composite daily average value. Periodic grab samples have been collected at Williford Spring Group, with the majority of measurements occurring between 2011 and 2023. Few sporadic water quality samples are available for Sylvan Spring Group. No continuous data loggers have been implemented to collect water quality data for Econfina Creek or its springs. Tables 2-2, 2-3, and 2-4 summarize water quality measurements taken at the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. Time series plots of nitrate concentration, specific conductance, and dissolved oxygen for Gainer Spring Group and Williford Spring Group are presented in Figures 2-19 and 2-20. Average nitrite + nitrate concentration for Gainer Spring Group (0.20 mg/L) and Williford Spring (0.08 mg/L) are well below the numeric nutrient standard of 0.35 mg/L for Florida Springs (Rule 62- 302.531 Florida Administrative Code).

Table 2-2. Gainer Spring Group Water Quality Summary Statistics

Parameter	Period of Record	Number of measurement dates	Minimum	Maximum	Average	Median
Nitrate + Nitrite (Total as N)*	1962 - 2023	97	0.01 mg/L	0.25 mg/L	0.20 mg/L	0.20 mg/L
Specific Conductivity*	1962 - 2024	104	86 μ S/cm	166 μ S/cm	136 μ S/cm	133 μ S/cm
Dissolved Oxygen*	1972 - 2023	99	0.71 mg/L	4.37 mg/L	1.71 mg/L	1.74 mg/L

*Data collected by the NFWFMD Florida DEP, and USGS. Data is available from NFWFMD databases, DEP WIN, and Storet. Values represent average for all spring vents.

Table 2-3. Williford Spring Water Quality Summary Statistics

Parameter	Date Range	Number of measurement dates	Minimum	Maximum	Period of Record Avg	Median
Nitrate + Nitrite (Total as N)*	1972 - 2023	50	0.04 mg/L	0.16 mg/L	0.08 mg/L	0.08 mg/L
Specific Conductivity*	1962 - 2023	40	82 μ S/cm	150 μ S/cm	135 μ S/cm	137 μ S/cm
Dissolved Oxygen*	1972 - 2023	37	0.21 mg/L	2.90 mg/L	0.75 mg/L	0.65 mg/L

*Data collected by the NFWFMD Florida DEP, and USGS. Data is available from NFWFMD databases, DEP WIN, and Storet.

Table 2-4. Sylvan Spring Water Quality Summary Statistics

Parameter	Date Range	Number of measurement dates	Minimum	Maximum	Period of Record Avg	Median
Nitrate + Nitrite (Total as N)*	2009	1	-	-	0.20 mg/L	-
Specific Conductivity*	1970 - 2009	3	127 μ S/cm	132 μ S/cm	129 μ S/cm	128 μ S/cm
Dissolved Oxygen*	2003 - 2009	3	1.40 mg/L	2.31 mg/L	1.80 mg/L	1.70 mg/L

* Data collected by the NFWFMD Florida DEP, and USGS. Data is available from NFWFMD databases, DEP WIN, and Storet.



Temporal trends in Gainer Spring Group nitrate concentration (nitrate + nitrite total mg/L as N), specific conductance (us/cm), and dissolved oxygen (mg/l) were evaluated to assess long-term increases or decreases with time (Figure 2-19, Table 2-5). Insufficient data was available for Williford and Sylvan Spring to assess water quality trends for these springs. Although more than 30 samples were collected for each water quality parameter for Williford these samples were mostly within the last few years and within a few years in the mid 2010s making trend testing undesirable. Trends were assessed using a two-sided Mann-Kendall test with a significance level (α) of 0.05, based on methods presented in Helsel and Hirsch 2002. Flow adjustments were considered for Gainer Spring Group but were not needed as these parameters did not display a relationship with Gainer Spring Group composite flow (Figure 2-21). Insufficient data was available for Williford and Sylvan Spring to assess relationships between flow and water quality parameters for these springs. Trends were evaluated from 2001–2023 for Gainer Spring Group due to sporadic measurements prior to 2001. Trend tests were based on annual median values to reduce the effect of serial correlation.

Based on the results in Table 2-5, Gainer Spring Group nitrate concentration displayed no statistically significant trend from 2001-2023. However, specific conductance displayed an increasing trend while dissolved oxygen displayed a decreasing trend from 2001-2023. Although specific conductance displayed

an increasing trend, values are still well below thresholds which would cause concern to freshwater ecology for the Gainer Spring Group. Low dissolved oxygen within freshwater spring systems in Florida such as Gainer Spring Group is typical and is not of concern. Furthermore, all parameters displayed no trend with Gainer Spring Group discharge, indicating potential reductions in flow caused from groundwater withdrawals would likely not significantly affect water quality for the Gainer Spring Group and Econfina Creek.

Table 2-5. Trends in Gainer Spring Group Water Quality

Parameter	Date Range	N	Kendal Tau Statistic	p value	Sen Slope	Trend
Nitrate + Nitrite (Total as N, mg/L)	2001-2023	23	-0.229	0.1281	-8.55E-04	no trend
Specific Conductivity, μ S/cm	2001-2023	21	0.6	0.0002	1.451	increasing
Dissolved Oxygen, mg/L	2001-2023	21	-0.671	0.0000	-4.7E-02	declining

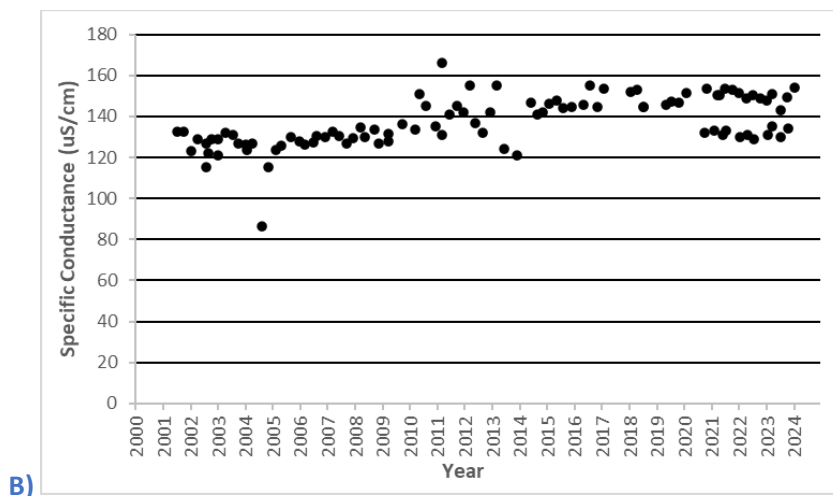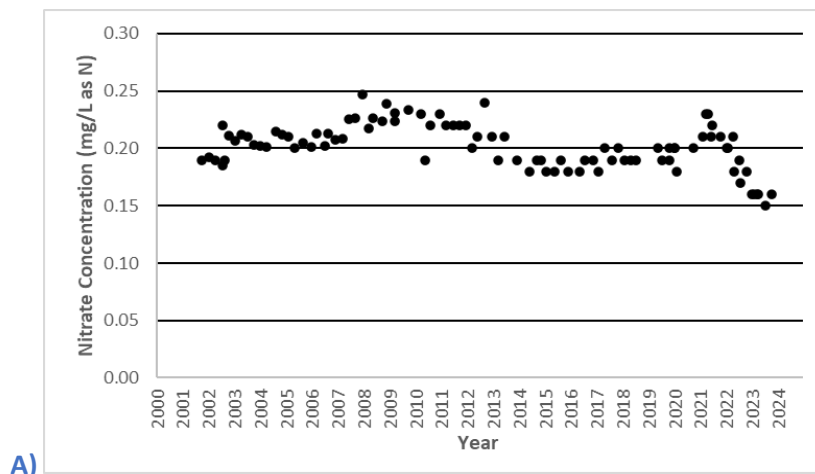




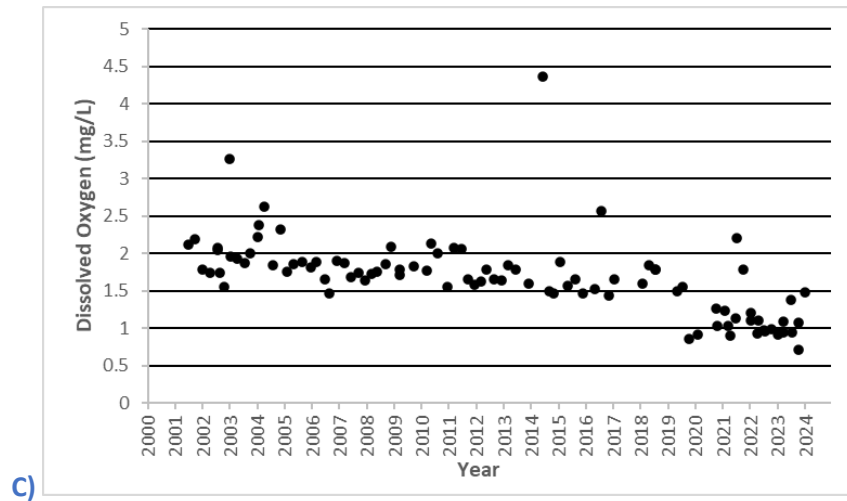



Figure 2-19. A) Nitrate Concentration at Gainer Spring Group between 2001 and 2023 B) Specific Conductance at Gainer Spring Group between 2001 and 2024 C) Dissolved Oxygen at Gainer Spring Group between 2001 and 2024

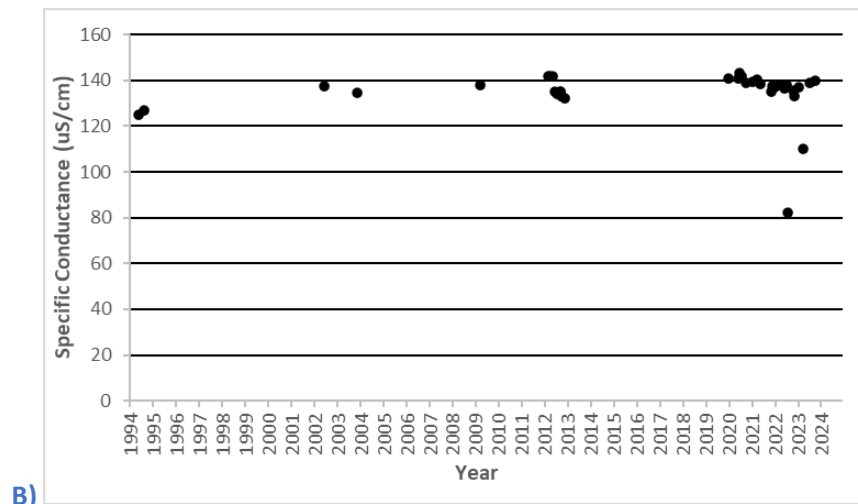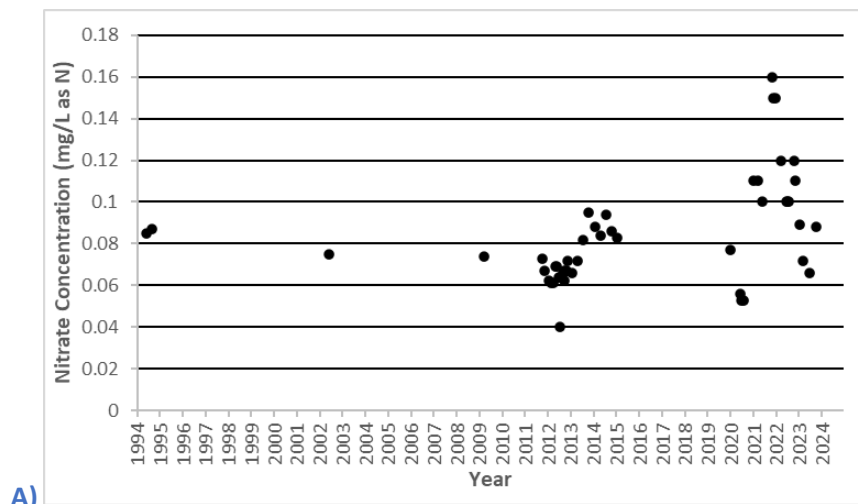

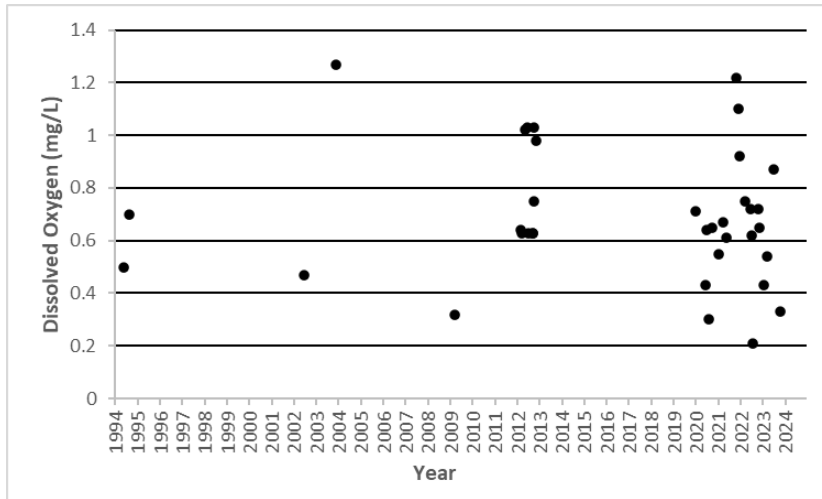


C)

Figure 2-20. A) Nitrate Concentration at Williford Spring between 1994 and 2023 B) Specific Conductance at Williford Spring between 1994 and 2023 C) Dissolved Oxygen at Williford Spring between 1994 and 2023

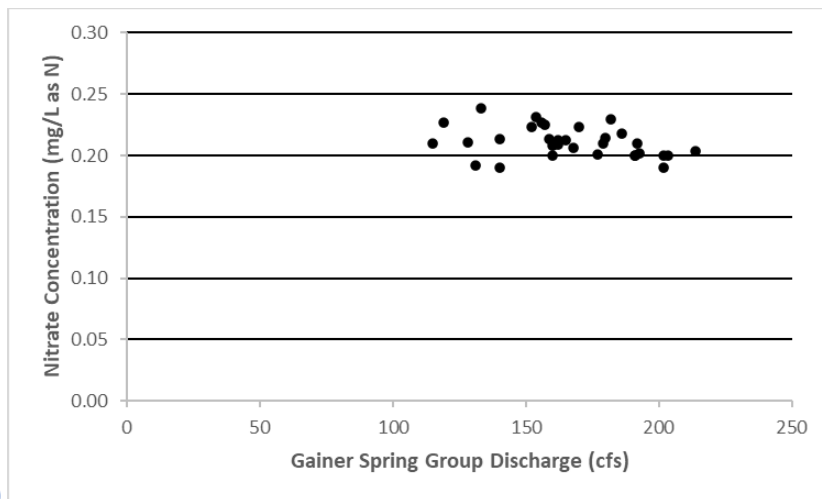

A)

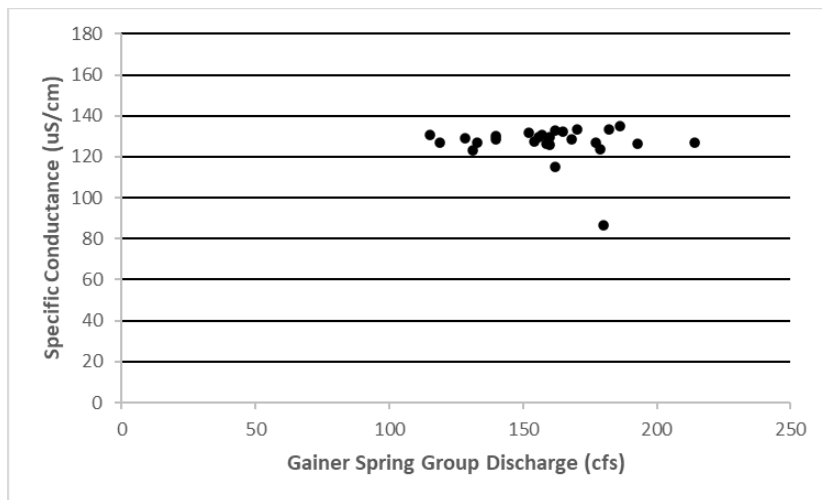

B)

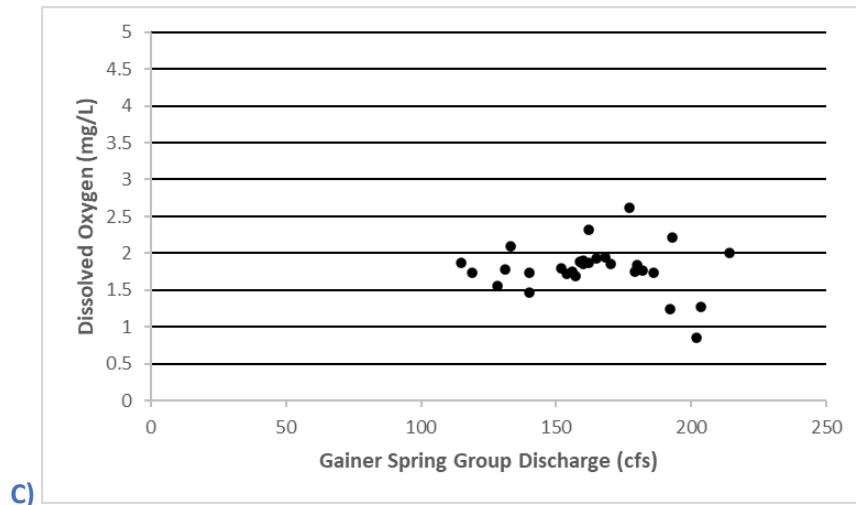


Figure 2-21. A) Nitrate Concentration versus Gainer Spring Group Composite Discharge B) Specific Conductance versus Gainer Spring Group Composite Discharge C) Dissolved Oxygen versus Gainer Spring Group Composite Discharge

2.8 Impact from Hurricane Michael on Econfina Creek

Hurricane Michael made landfall near Mexico Beach, Florida, on October 10, 2018, as a Category Five storm. The hurricane cut an intensely destructive path across several counties of the Florida Panhandle. In addition to damaging structures and communities, the storm devastated forests throughout the region. As a result, fallen trees and vegetation smothered numerous streams, rivers, and accompanying floodplains, with Econfina Creek being among the hardest hit (Figure 2-22). Debris within stream channels restricts water flow and reduces stream capacity, which can back up water into the floodplain and surrounding areas. Debris within floodplains compounds this impact by further slowing drainage, causing flooding to persist and in some cases causing additional localized flooding due to widespread impoundment. Both flood levels and frequency are increased. Hydrographs displaying stage data from Econfina Creek demonstrate the degree to which hydrologic conditions were impaired from the storm (Figure 2-23).



Figure 2-22. Econfina Creek and Floodplain, November 10, 2018

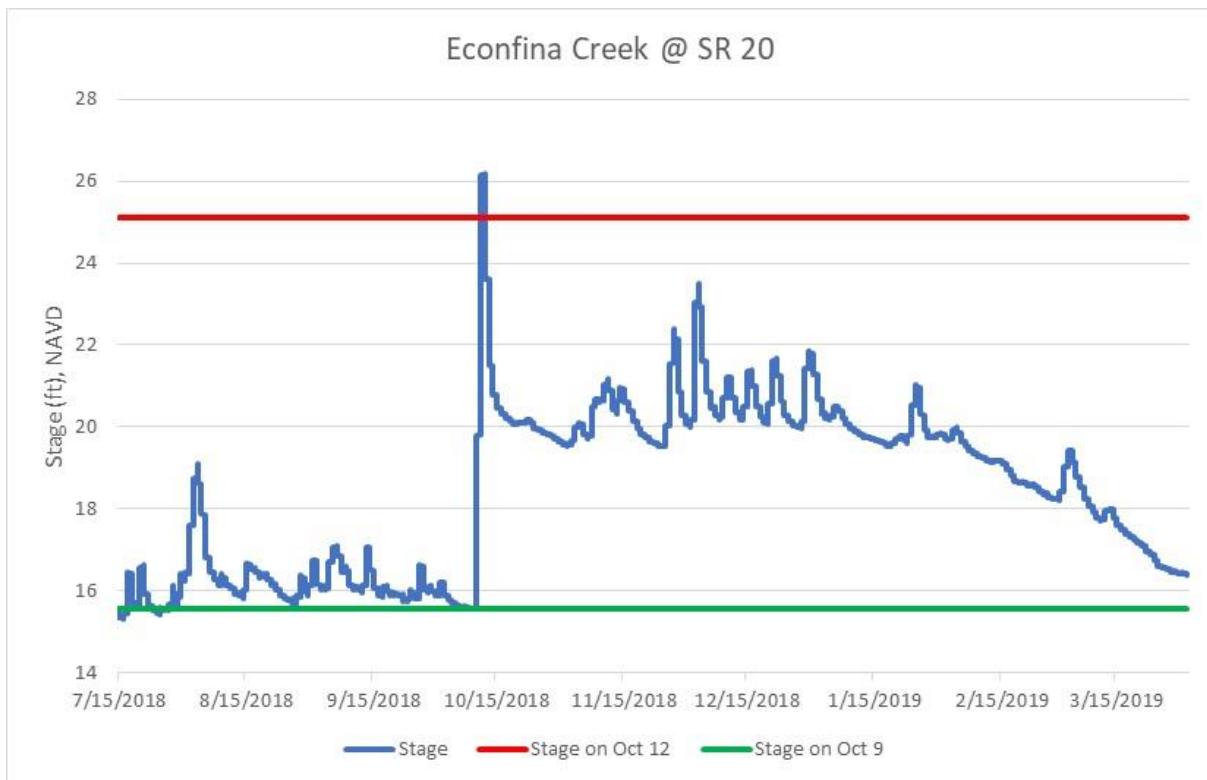


Figure 2-23. Econfina Creek Stage @ SR 20 from 7/15/2018 to 4/1/2019.

In support of DEP, the Northwest Florida Water Management District evaluated stream conditions through aerial surveys and analysis of aerial photography and stage data. Stream segments were prioritized for cleanup based on continuing flooding impacts to residents and roadways. To facilitate cooperative analysis and public outreach, the District established an interactive online damage and recovery assessment map and a public photograph submission tool (<https://www.nfwwater.com/Water-Resources/Hurricane-Michael>).

The top priorities identified for stream channel debris cleanup included two proposed phases of work in Econfina Creek. From February 1 to March 29, 2019, DEP tasked contractors to remove debris from the identified first phases of work in Econfina Creek. Approximately 82,532 cubic yards were removed from Econfina Creek from this effort. In Econfina Creek, the in-channel removal target was 100% (i.e. from bank to bank). Approximately 13.49 miles of channel was cleared during this effort (Figure 2-24). The second phase of this effort as depicted in Figure 2-21 has not been completed.

The northern portion of Econfina Creek and much of the floodplain remains obstructed (Figure 2-25). The main channel in the portion of Econfina Creek below Williford Spring, inclusive of the MFL study area, remains relatively clear due to debris removal efforts. The floodplain has sparse trees due to hurricane damage, with increasing vegetative cover in some areas (Figure 2-26). The impact of downed debris resulting from Hurricane Michael as well as the impact of debris removal efforts on Econfina Creek hydrology is discussed in more detail in Sections 3.4.3 and 3.5.3.

In December 2023, District contractors started stream debris assessments on the lower and upper Econfina Creek to document and quantify the debris within the waterway. The assessments were completed in January 2024 and data was used by a District-contracted engineering firm to model the current stream conditions. The modeling was completed in December 2024 and the results showed the need to remove debris blockages and restore stream function. In conjunction with the stream debris modeling, the District released a Request for Proposals for waterway debris removal services. On August 8, 2024, the Governing Board approved the District to contract with the top six waterway debris removal contractors. All six contracts have been executed and the plan is to start the waterway debris removal in Spring 2025. The waterway debris removal schedule will be determined by priorities, so work is expected to begin with Bayou George Creek and Bear Creek before work begins on Econfina Creek.



Figure 2-24. Debris Removal on Econfina Creek (as of 3/29/2019)



Figure 2-25. Econfina Creek near Scott Rd., April 2023



Figure 2-26. Econfina Creek between SR 20 and CR 388, January 2023

2.9 Natural Resources

Compared with many other systems in Florida, Econfina Creek remains in a relatively natural condition. Within the Econfina Creek watershed and the groundwater contribution area of the Econfina Creek Springs there is little development (Section 2.5) or groundwater extraction (Section 3.7). In addition, the majority of the floodplain is under public ownership and protected from development (Figure 2-14).

2.9.1 Instream Habitats

Multiple types of instream habitat are present along the Econfina Creek study area including spring pools, bare sand substrate, woody debris, and submerged aquatic/littoral vegetation. Multiple springs are located in the study area of Econfina Creek (Section 2.2). These springs either discharge directly into (Emerald Spring) or have a short spring run before joining Econfina Creek. The majority of the instream creek substrate present along the study area of Econfina Creek consists of sand with little organic matter. River runs with areas of relatively consistent depth and water velocity are abundant. On the far edge of large bends in the creek, erosion has created areas of deep-water habitat. In addition, depositional habitats such as shoals, points, and sand bars are present throughout the system.

Two types of instream woody habitat were observed along Econfina Creek. Dead woody debris consists of tree stumps and fallen logs/branches present and inundated along the edge of the river channel. Live

roots include tree roots, cypress knees, etc. found along the river edge that are routinely inundated by river flow or have become exposed due to erosion from water flow. Dead woody debris tends to be found deeper in the river channel and at a lower elevation on average than live roots which tend to be found on the creek channel/riparian corridor interface. Hurricane Michael and subsequent restoration activities had a significant impact on woody debris habitat in Econfinia Creek. Immediately following Hurricane Michael, the high winds associated with the category 5 hurricane deposited extensive woody debris in the system resulting in increased resistance to river flows and extensive flooding (Figure 2-19). DEP subsequently conducted extensive debris-removal activities to alleviate flooding and restore access to the system, resulting in little woody habitat remaining in the system (Figure 2-23). Since this time, woody debris has continued to be deposited through natural processes in Econfinia Creek and appears to be returning to more stable conditions.

Submerged aquatic vegetation (SAV) is limited along the Econfinia Creek study area. The majority of SAV consists of isolated patches of coontail (*Ceratophyllum demersum*) and, where present, this species was estimated to comprise less than 0.1 percent cover during multiple surveys between 2019 and 2023. Other common types of SAV such as eel grass (*Vallisneria americana*) were not observed in the study area.

The majority of the Econfinia Creek study area shoreline is in natural condition although littoral vegetation is limited. The majority of the Econfinia Creek shoreline is comprised of steep drop-offs eroded from creek flows with little to no littoral shelf. During multiple surveys between 2019 and 2023, District staff noted areas where littoral vegetation capable of growth have become inhabited by species such as cattail (*Typha* sp.), pennywort (*Hydrocotyle umbellata*), arrowhead (*Sagittaria lancifolia*), (*Sagittaria graminea*), green briar (*Smilax* sp.), climbing hempsvine (*Mikania scandens*), and pickerelweed (*Pontederia cordata*).

2.9.2 Riparian/Floodplain Habitats

The Econfinia Creek floodplain remains largely in an impacted and early transitional period following Hurricane Michael. Prior to Hurricane Michael, the floodplain consisted of mature wetland tree species such as cypress (*Taxodium* spp.), however Hurricane Michael destroyed most of the mature trees in October 2018. As a result, the Econfinia Creek floodplain consists primarily of shrub and young tree species with extensive amounts of dead woody debris in areas. Few specimens remain in the canopy stratum and the successional trajectory of the Econfinia Creek floodplain remains uncertain.

Detailed vegetation surveys of the Econfinia Creek floodplain after Hurricane Michael are unavailable. Qualitative surveys by District staff identified limited quantities of mature cypress (*Taxodium* sp.), slash pine (*Pinus elliottii*), laurel oak (*Quercus laurifolia*), tupelo (*Nyssa* spp.), and cabbage palm (*Sabal palmetto*) in the canopy strata. However, it is unclear how many of these specimens are located in the historical floodplain or in other community types located at higher elevations near the creek channel. Sub-canopy species observed include saltbush (*Baccharis* sp.), cabbage palm, cypress, St. Johns wort (*Hypericum* sp.), and saw palmetto (*Serenoa repens*) growing along the water's edge.

2.9.3 Wildlife

The relatively natural condition of Econfinia Creek makes it important habitat for a wide variety of organisms. The following section describes confirmed species observed utilizing Econfinia Creek, its floodplain, and springs. Species lists were assembled based upon direct observations by District staff, observations from the Florida Natural Areas Inventory (FNAI) Biodiversity Matrix, Florida Fish and Wildlife Conservation Commission collections, and the University of Florida Ichthyology Collection. No listed

mammal or amphibian/reptile species have been documented in Econfina Creek and mammals potentially using the springs as a thermal refuge are excluded due to the construction of Deer Point Lake.

2.9.3.1 Fish Species

A total of 42 fish species have been documented along Econfina Creek, none of which are listed federally or by the state of Florida (Table 2-6). Of these species, largemouth bass (*Micropterus salmoides*) are the deepest bodied native fish and have the greatest potential to have their passage across shallow areas limited by low water levels.

Due to the presence of the water control structure forming Deer Point Lake Reservoir, diadromous fish species such as gulf sturgeon (*Acipenser oxyrinchus desotoi*) and striped bass (*Morone saxatilis*), which are present in other spring and river systems of the Florida panhandle, are not capable of utilizing Econfina Creek. There were two collections of American eel (*Anguilla rostrata*), a catadromous species, in Econfina Creek in 1957 (FMIC Ichthyology Collection), however, the Deer Point Lake water control structure was completed in 1961 after these individuals were documented.

Grass carp (*Ctenopharyngodon Idella*) have been observed by District staff in the Sylvan Spring run. Grass carp are an exotic species native to the large coastal rivers in Siberia such as the Amur River (FWC 2024, <https://myfwc.com/wildlifehabitats/profiles/freshwater/grass-carp/>). This species is listed as a conditional, non-native species by the state of Florida (chapter 68-5.004, Florida Administrative Code), whose legal introductions into a waterbody for vegetation control require a permit from the FWC (Rule 68-5.005, Florida Administrative Code). The FWC has not issued a permit for grass carp in Econfina Creek and it is assumed that these individuals escaped from another location or were illegally introduced into the system.

Table 2-6. List of Fish Species Documented Along Econfina Creek

Species	Common Name	Species	Common Name
<i>Ameiurus serracanthus</i>	Spotted bullhead	<i>Lepomis auratus</i>	Redbreast sunfish
<i>Anguilla rostrata</i>	American eel	<i>Lepomis gulosus</i>	Warmouth
<i>Aphredoderus sayanus</i>	Pirate perch	<i>Lepomis macrochirus</i>	Bluegill
<i>Ctenopharyngodon idella</i>	Grass carp	<i>Lepomis marginatus</i>	Dollar sunfish
<i>Cyprinella venusta</i>	Blacktail shiner	<i>Lepomis microlophus</i>	Redear sunfish
<i>Cyprinella venusta</i> <i>cercostigma</i>		<i>Lepomis punctatus</i>	Spotted sunfish
<i>Elassoma evergladei</i>	Everglades pygmy sunfish	<i>Lucania goodei</i>	Bluefin killifish
<i>Enneacanthus gloriosus</i>	Bluespotted sunfish	<i>Micropterus salmoides</i>	Largemouth bass
<i>Erimyzon sucetta</i>	Lake chubsucker	<i>M. salmoides floridanus</i> x <i>salmoides</i>	Largemouth bass hybrid
<i>Esox americanus</i>	Redfin pickerel	<i>Minytrema melanops</i>	Spotted sucker
<i>Esox americanus</i> x <i>vericulatus</i>	Grass pickerel	<i>Moxostoma poecilurum</i>	Blacktail redhorse
<i>Esox niger</i>	Chain pickerel	<i>Notropis harperi</i>	Redeye chub
<i>Etheostoma edwini</i>	Brown darter	<i>Notropis longirostris</i>	Longnose shiner
<i>Etheostoma swaini</i>	Gulf darter	<i>Notropis petersoni</i>	Coastal shiner
<i>Fundulus escambiae</i>	Eastern starhead minnow	<i>Notropis texanus</i>	Weed shiner
<i>Gambusia holbrooki</i>	Mosquitofish	<i>Noturus funebris</i>	Black madtom
<i>Heterandria Formosa</i>	Least killifish	<i>Noturus gyrinus</i>	Tadpole madtom
<i>Ichthyomyzon gagei</i>	Southern brook lamprey	<i>Noturus leptacanthus</i>	Speckled madtom
<i>Ictalurus punctatus</i>	Channel catfish	<i>Percina nitrofasciata</i>	Blackbanded darter
<i>Labidesthes sicculus</i>	Brook silverside	<i>Pteronotropis hypselopoterus</i>	Sailfin shiner
<i>Labidesthes sicculus</i> <i>vanhyningi</i>	Silverside	<i>Pteronotropis signipinnis</i>	Flagfin shiner
<i>Lepisosteus oculatus</i>	Spotted gar		

2.9.3.2 Freshwater Mussels

The FWC reported seven mussel species along Econfina Creek (Table 2-7). Many freshwater mussel species inhabit streams and rivers with shallow, sandy bottoms such as those found along Econfina Creek. Mussels are filter feeders which remove algae, bacteria, and other organic material from the water column; and by doing so can help clean the water they inhabit. Mussels can also provide food sources for other animals and serve as sentinel species as indicators of water quality.

While relatively little is known about the life history of most mussel species, many utilize host fish for their larvae (glochidia) to attach to and parasitize for a period of time. While additional research is needed in determining mussel host fish species, host fish for several species found in Econfina Creek have been

identified and include centrarchid (sunfish), darter, and several members of the Poeciliidae family (Table 2-7).

Currently there are two listed species which have been documented in Econfina Creek: Gulf moccasinshell (Figure 2-27a) and oval pigtoe (Figure 2-27b). Both species are federally designated endangered mussels (invertebrates) which live buried in the creek substrate. Within their range, primary threats to both mussel species include effects from human development and increased populations such as freshwater impoundments resulting in sediment accumulation, habitat fragmentation, and loss of food and host fish (FWC 2019a, FWC 2019b). In addition, competition with invasive species such as the Asian clam (*Corbicula fluminea*) and pollution from pesticides and chemicals are known to pose significant threats to native mussel species in Florida.

The gulf moccasinshell (*Medionidus penicillatus*) (Figure 2-27a) is a small freshwater mussel reaching a maximum length of 2.2 inches (FWC 2019a). This species inhabits creeks and large rivers with a sandy/gravel substrate and moderate currents and is known to inhabit Econfina Creek, Chipola River, Choctawhatchee River, Apalachicola River, and Yellow River in Florida. While the host fish for gulf moccasinshell glochidia are currently unknown, there is agreement that species of the genus *Medionidus* are specialists which use darters as their host species (O'Brien and Williams 2002, Williams et al. 2014). Three darter species have been identified in Econfina Creek: brown darter (*Etheosoma edwini*), gulf darter (*E. swaini*), and blackbanded darter (*Percina nitrofasciata*).

The oval pigtoe (*Pleurobema pyriforme*) (Figure 2-27b) is a small freshwater mussel reaching a maximum length of 2.4 inches (FWC 2019b). This species inhabits small creeks and mid-sized rivers with substrates ranging from sandy silts to gravel and slow to moderate currents. The eastern mosquitofish (*Gambusia holbrooki*) and sailfin shiner (*Pteronotropis hypselopterus*) are the primary host fish for oval pigtoe glochidia, with both host fish being documented in the Econfina Creek system. Oval pigtoe are known to inhabit Econfina Creek, Chipola River, Ochlockonee River, and Suwannee River in Florida.



Figure 2-27. A) Gulf Moccasinshell (*Medionidus penicillatus*) and **B)** Oval Pigtoe (*Pleurobema pyriforme*). Photos Provided by the Florida Fish and Wildlife Conservation Commission

Table 2-7. List of Mussels Documented in Econfina Creek and Their Known Host Fish Species. Species in Bold are Federally Listed as Endangered. Host Fish Species Identified from: Freshwater Mussel Host Database, Illinois Natural History Survey Mollusk Collection. <https://mollusk.inhs.illinois.edu/57-2/>

Species	Common Name	Known Host Fish Species
<i>Elliptio pullata</i>	Gulf Spike	<i>Lepomis macrochirus</i> , <i>Micropterus salmoides</i>
<i>Medionidus penicillatus</i>	Gulf Moccasinshell	<i>Etheosoma edwini</i> , <i>Percina nigrofasciata</i> , <i>Gambusia holbrooki</i> , <i>Poecilia reticulata</i>
<i>Pleurobema pyriforme</i>	Oval Pigtoe	<i>Pteronotropis hypselopterus</i> , <i>Gambusia holbrooki</i> , <i>Poecilia reticulata</i>
<i>Strophitus radiatus</i>	Rayed Creekshell	Unknown
<i>Toxolasma paulum</i>	Iridescent Lilliput	Unknown
<i>Villosa vibex</i>	Southern Rainbow	<i>Lepomis cyanellus</i> , <i>Fundulus olivaceus</i> , <i>Micropterus coosae</i> , <i>Micropterus salmoides</i> , <i>Micropterus punctulatus</i> , <i>Lepomis megalotis</i> , <i>Micropterus punctatus</i>
<i>Villosa lienosa</i>	Little Spectaclecase	<i>Lepomis cyanellus</i> , <i>Lepomis humilis</i> , <i>Lepomis macrochirus</i> , <i>Lepomis megalotis</i> , <i>Lepomis microlophus</i> , <i>Micropterus salmoides</i>

2.9.3.3 Invertebrates

The Florida Natural Areas Inventory lists eight invertebrate insect species (Table 2-8). None of these species are listed federally or by the state of Florida.

Table 2-8. List of Documented Invertebrate Species along Econfina Creek. No Documented Invertebrate Species are Listed and as Threatened or Endangered

Species	Common Name	Occurrence
<i>Baetisca rogersi</i>	A Mayfly	Documented
<i>Hydroptila berneri</i>	Berner's microcaddisfly	Documented
<i>Sphodros abboti</i>	Blue Purse-Web Spider	Documented
<i>Orthotrichia dentata</i>	Dentate Orthotrichian Microcaddisfly	Documented
<i>Oxyethira janella</i>	Little-entrance Oxyethiran Microcaddisfly	Documented
<i>Oxyethira pescadori</i>	Pescador's Bottle-Cased Caddisfly	Documented
<i>Sphodros rufipes</i>	Red-Legged Purse-Web spider	Documented
<i>Dromogomphus armatus</i>	Southeastern Spinyleg	Documented

2.10 Recreation

The main use of Econfina Creek is for recreation. Lands surrounding much of the system are under public ownership and managed for low-impact uses such as swimming, hiking, fishing, and birding as well as hunting. (Figure 2-14)(NWFWMMD 2022).

The cool, clear waters of the many springs and relatively undeveloped nature of the floodplain along Econfina Creek make canoeing and kayaking perhaps the largest recreational use of Econfina Creek.

Econfina Creek is a state-designated canoe trail and has several locations where canoes and kayaks can be launched including Scott Road, Walsingham Bridge, SR 20, and CR 388 (Figure 2-28). Canoe and kayak rentals are available to the public from a privately owned livery located along the creek near SR 20.

While relatively limited, power boating does occur along the Econfina Creek study area. Primary reasons for power boating along Econfina Creek include fishing and transportation to the many springs for recreation. Public boat launches are located further downstream at CR 388 and along Deer Point Lake. Large power boats have not been observed by District staff likely due to the relatively narrow and shallow nature of portions of Econfina Creek. This is particularly evident moving upstream toward SR 20 where the creek narrows considerably, making it potentially difficult for power boats to pass each other in areas.

The District operates and maintains several recreation areas within the Econfina Creek Water Management Area including the Pitt and Sylvan Spring and Williford Spring Recreation areas. The 10-acre Pitt and Sylvan Spring recreation area includes a trail and boardwalk system leading from Pitt Spring to the Sylvan Spring area and includes an overlook and a tubing put-in dock. A tubing take-out dock is at the confluence of Pitt Spring run and Econfina Creek. The Williford Spring recreation area features a boardwalk system that takes users around the spring and to Econfina Creek, and a nature trail that leads users to the nearby Pitt and Sylvan Springs recreation area (Figure 2-29). In addition to the District-maintained recreation areas, several of the Gainer Spring Group springs are utilized for swimming and recreation including Emerald Spring, which features a cove carved into the bank with a small, man-made "beach" to the south and the springs along the wide spring run on the west side of Econfina Creek just above Emerald Spring.

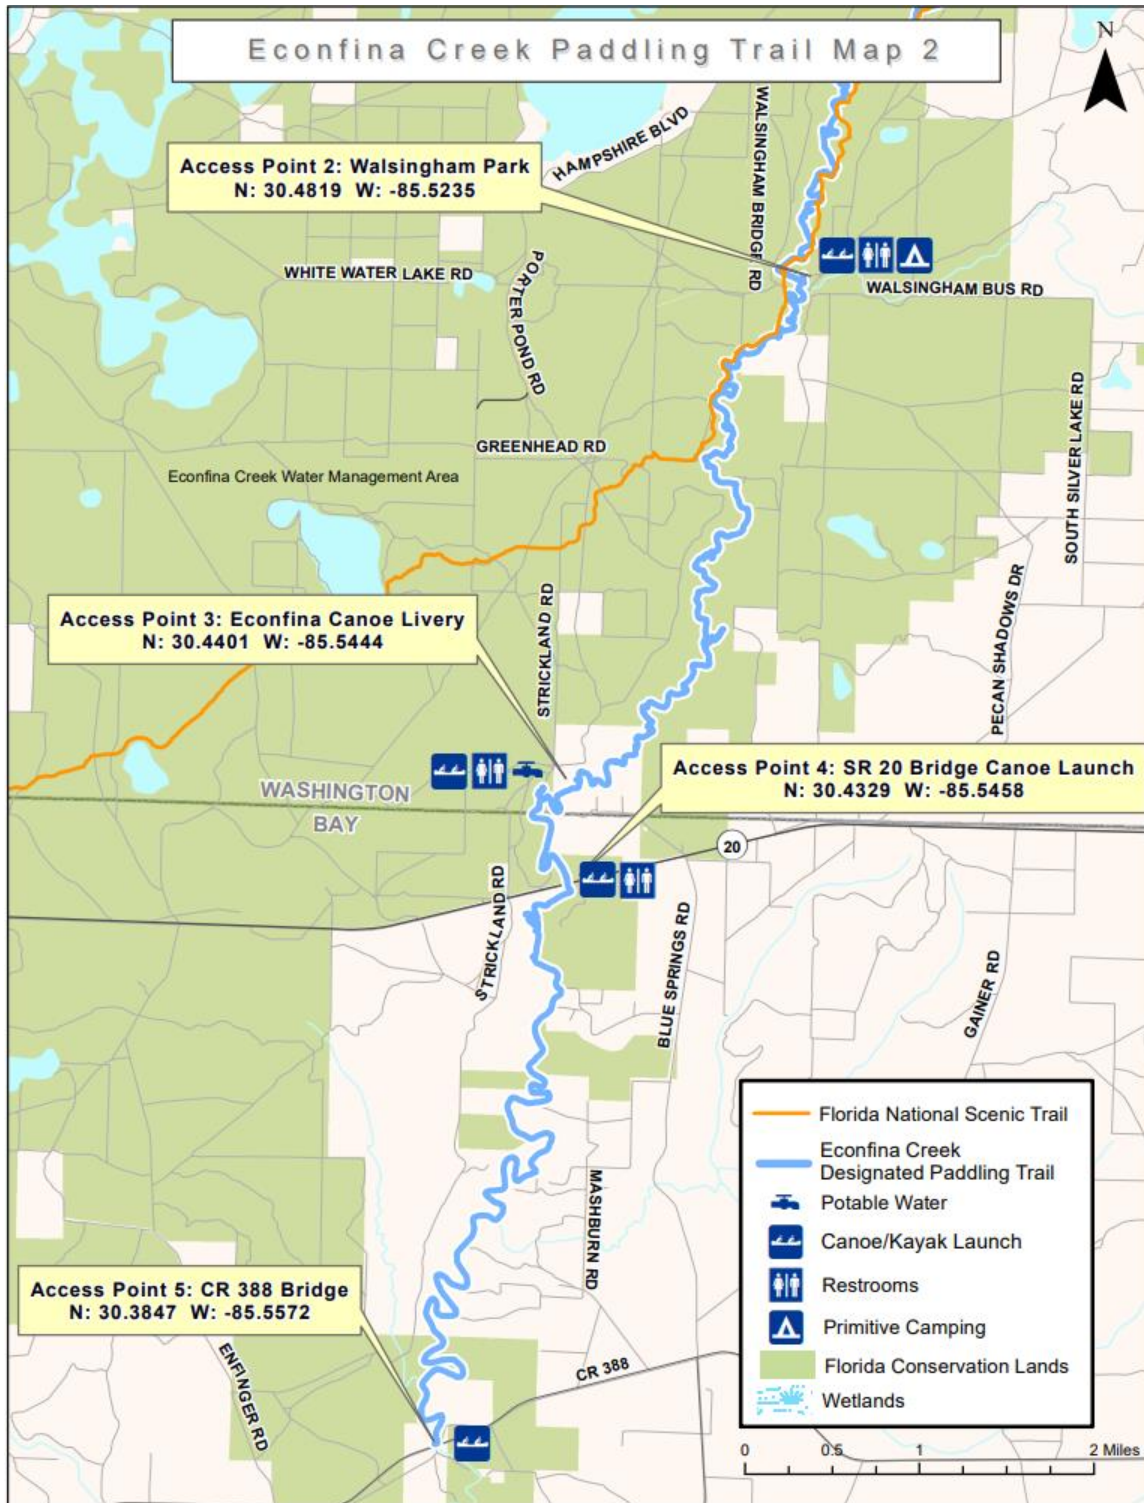


Figure 2-28. Econfina Creek Paddling Trail (Reprinted from FDEP Econfina Creek Paddling Guide, 2023)



Figure 2-29. Williford Spring Recreation Area (Photo taken post Hurricane Michael)

3 Hydrology

This section presents a detailed evaluation of hydrological characteristics of Econfina Creek and its springs as well as a summary of District's hydrologic data collection along Econfina Creek.

3.1 Hydrologic Data Collection

Surface water flow and stage are measured at multiple locations along Econfina Creek (Figure 3-1). The District maintains three stream gauging stations measuring continuous stage and discharge: Econfina Creek @ SR 20 (NWFID 8458), Econfina Creek @ Walsingham Bridge (NWFID 8558), and Econfina Creek @ Scott Road (NWFID 8557). Additionally, the USGS maintains a stream gauging station measuring continuous stage and discharge at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388). The period of record for each station is presented in Table 3-1. Continuous daily average discharge and stage is available at the USGS Station 2359500 Econfina Creek Near Bennett, FL from October 1935 to present and October 1971 to present, respectively, although a data gap persists between October 1994 and September 1998. Continuous discharge and stage data are available at the District's Econfina Creek @ SR 20 station from November 1992 to present, although a data gap persists between August 1994 to August 1998. Continuous discharge and stage data are available at the District's Econfina Creek @ Walsingham Bridge and Econfina Creek @ Scott Rd. stations from August 1998-present. For all District stations, data is unavailable from October 11, 2018, through March 30, 2019, due to the effects of Hurricane Michael on Econfina Creek in the vicinity of these stations. Continuous discharge and stage data is available for this time period at the USGS Econfina Creek @ CR 388 station, allowing for assessment of hydrologic impacts caused by Hurricane Michael on Econfina Creek.

Spring discharge is measured by the District for several springs along Econfina Creek including: Gainer Spring Group, Williford Spring Group, Sylvan Spring Group, Devil's Hole, and Econfina Blue Spring (Table 3-1). Discharge measurements for Gainer Spring Group represent composite discharge of all spring vents within the spring group. Quarterly discharge has been measured for Gainer Spring Group from 2002 to present. Periodic discharge has been measured at Williford Spring Group and Sylvan Spring Group with the majority of measurements occurring from 2015 to present. The District has established a continuous recorder above and below the Gainer Spring Group, measuring the composite discharge of all 15 spring vents associated with the spring group. Continuous Gainer Spring Group discharge is available from March 2019 - May 2019 and November 2019 to present for this station.

Within the Econfina Creek watershed, the District collects quarterly groundwater levels at six sites (Table 3-2). NWFID 3216 (Greenhead) has the longest continuous groundwater level record in the region, with quarterly to monthly measurements from 1982 to present. Quarterly levels have been collected at NWFID 5960 (Porter Pond) and NWFID 5958 (George's 40) monitor wells from May 2008 to present. Quarterly groundwater levels have been collected at NWFID 5953 (Powerline) from March 2009 to present. The District recently begun collecting quarterly levels at wells NWFID 5950 (Trapp Pond) and NWFID 5961 (Section 20) from Jan 2017 to present.

Table 3-1. Summary of Surface Water Hydrologic Data Collection for Econfina Creek and Deer Point Lake Watersheds

Station Number	Site Name	Parameter: Period of Record
USGS 02359500	Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)	Discharge: Oct. 1935 - Oct. 1994, Sept. 1998 -present Stage: Oct 1971 - Oct. 1994, Sept. 1998 – present
NWFID 8548	Econfina Creek @ SR 20	Discharge: Nov. 1992 - Aug. 1994, Aug. 1998 - present Stage: Nov. 1992 - Aug. 1994, Aug. 1998- present
NWFID 8558	Econfina Creek @ Walsingham Bridge	Discharge: Aug. 1998 - present Stage: Aug 1998 - present
NWFID 8557	Econfina Creek @ Scott Rd.	Discharge: Aug. 1998 - present Stage: Aug 1998 - present
NWFID 8099	Econfina Creek Above Gainer Spring Group	Discharge: Mar. 2019 - May 2019, Nov. 2019 - present Stage: Jun 2018 - present
NWFID 8100	Econfina Creek Below Gainer Spring Group	Discharge: Mar. 2019 - May 2019, Nov. 2019 - present Stage: Jun 2018 - present
NWFID 10128	Gainer Spring Group Composite	Continuous Discharge: Mar. 2019 - May 2019, Nov. 2019 - present Field Visit Discharge Measurements: Seven measurements prior to 2002; quarterly measurements 2002 - present
NWFID 8677	Williford Spring	Field Visit Discharge Measurements: 24 total measurements, majority of measurements 2015 - present.
NWFID 8727	Sylvan Spring	Field Visit Discharge Measurements: 17 total measurements, majority of measurements 2016 - present.
NWFID 8908	Devil's Hole	Field Visit Discharge Measurements: Eight total measurements
NWFID 8730	Econfina Blue Spring	Field Visit Discharge Measurements: 19 total measurements, majority of measurements 2016-present.
NWFID 8571	Bear Creek @ US 231	Discharge: Aug 1998 - present Stage: Aug 1998 - present
NWFID 8549	Little Bear Creek @ CR 388	Discharge: Aug 1998 - present Stage: Aug 1998 - present
NWFID 8544	Deer Point Lake, Near Dam	Stage: Jun 2002 - present

Table 3-2. Summary of Groundwater Hydrologic Data Collection for Econfina Creek Watershed

Station Number	Site Name	Parameter: Period of Record
NWFID 3216	USGS-422A Near Greenhead/S834	Quarterly to Monthly Groundwater Levels: May 1982 - present, two measurements in 1962
NWFID 5960	Porter Pond East	Quarterly Groundwater Levels: May 2008 - present, periodic previously
NWFID 5958	George's 40 Floridan	Quarterly Groundwater Levels: May 2008 - present, periodic previously
NWFID 5950	Trapp Pond	Quarterly Groundwater Levels: Jan 2017 - present, periodic previously
NWFID 5961	Section 20	Quarterly Groundwater Levels: Jan 2017 - present, periodic previously
NWFID 5953	Powerline/S731	Quarterly Groundwater Levels: Mar 2009 - present, periodic previously



Figure 3-1. Econfina Creek Surface Water Monitoring Stations and Groundwater Monitoring Wells

3.2 Econfina Creek Discharge

Flow frequency curves, based on period of record daily average flows for the four surface water stations on Econfina Creek are presented in Figure 3-2. A comparison of flows for select flow percentiles is shown in Tables 3-3 and 3-4. Median flow at Econfina Creek @ Scott Rd. is 44 cfs, representing 9% of total flow measured at Econfina Creek @ CR 388. Flow measured at the Scott Rd. station is derived primarily from surface water runoff including flow from several intermittent tributaries. Econfina Creek flow increases significantly heading downstream with much of the flow being derived from groundwater discharge. Median flow is 134 cfs at Econfina Creek @ Walsingham Bridge (located north of Williford, Sylvan, and Gainer spring groups) and 264 cfs at Econfina Creek @ SR 20 (located south of Williford and Sylvan spring groups, but north of Gainer Spring Group), respectively. Median flows at these stations represent approximately 26% and 52% respectively of total flow measured at Econfina Creek @ CR 388. Median flow at Econfina Creek @ CR 388 is 506 cfs, approximately double the median flow at SR 20, approximately seven miles north. Much of the flow in the portion of Econfina Creek between SR 20 and CR 388 is derived from the Gainer Spring Group with the remaining flow being derived from surface water inputs from intermittent streams located north of CR 388.

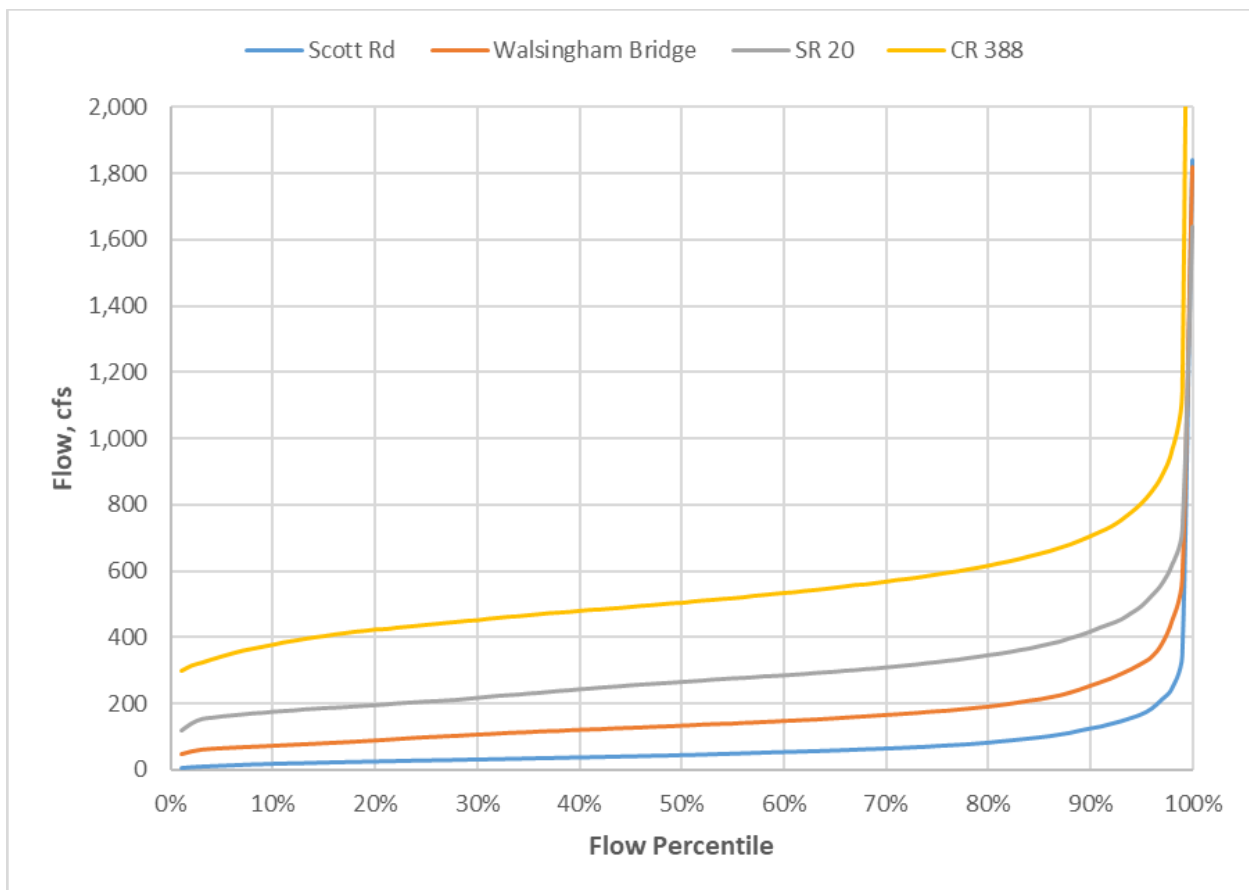


Figure 3-2. Flow Frequency Curves for Econfina Creek Surface Water Stations

Table 3-3. Flow Comparison for Econfina Creek Surface Water Stations (cfs)

Flow Percentile	Econfina Creek at CR 388	Econfina Creek at SR 20	Econfina Creek at Walsingham Bridge	Econfina Creek at Scott Rd.
5%	345	160	66	12
10%	380	174	73	17
20%	426	194	89	25
30%	454	216	107	31
40%	482	242	121	37
50%	506	264	134	44
60%	536	284	148	53
70%	570	308	166	64
80%	618	345	191	82
90%	707	416	254	125
95%	806	493	321	167

Table 3-4. Percent of Flow for Econfina Creek Surface Water Stations Relative to CR 388 Station

Flow Percentile	Econfina Creek at SR 20	Econfina Creek at Walsingham Bridge	Econfina Creek at Scott Rd.
5%	46%	19%	3%
10%	46%	19%	5%
20%	46%	21%	6%
30%	48%	24%	7%
40%	50%	25%	8%
50%	52%	26%	9%
60%	53%	28%	10%
70%	54%	29%	11%
80%	56%	31%	13%
90%	59%	36%	18%
95%	61%	40%	21%

3.3 Econfina Creek Spring Discharge

Discharge for first and second magnitude springs located along Econfina Creek is summarized in Table 3-5. Mean and median discharge for the Gainer Spring Group composite was 165 cfs and 167 cfs respectively. Median discharge was 42 cfs for Williford Spring Group and 18 cfs for Sylvan Spring Group. Mean and median discharges were similar for all springs, indicating a symmetrical non-skewed distribution of spring discharge. A flow frequency curve for Gainer Spring Group composite discharge is shown in Figure 3-3. Flows for Gainer Spring Group composite range between 30 cfs and 224 cfs, with a relatively linear flow frequency curve further indicating a symmetrical non-skewed distribution of spring discharge.

Table 3-5. Econfina Creek Spring Discharge Summary (cfs)

Spring	Number of Discharge Measurements	Mean	Median	Min	Max
Gainer Spring Group Composite	92	165	167	30	224
Williford Spring Group	31	42	42	23	72
Sylvan Spring Group	35	18	18	11	21

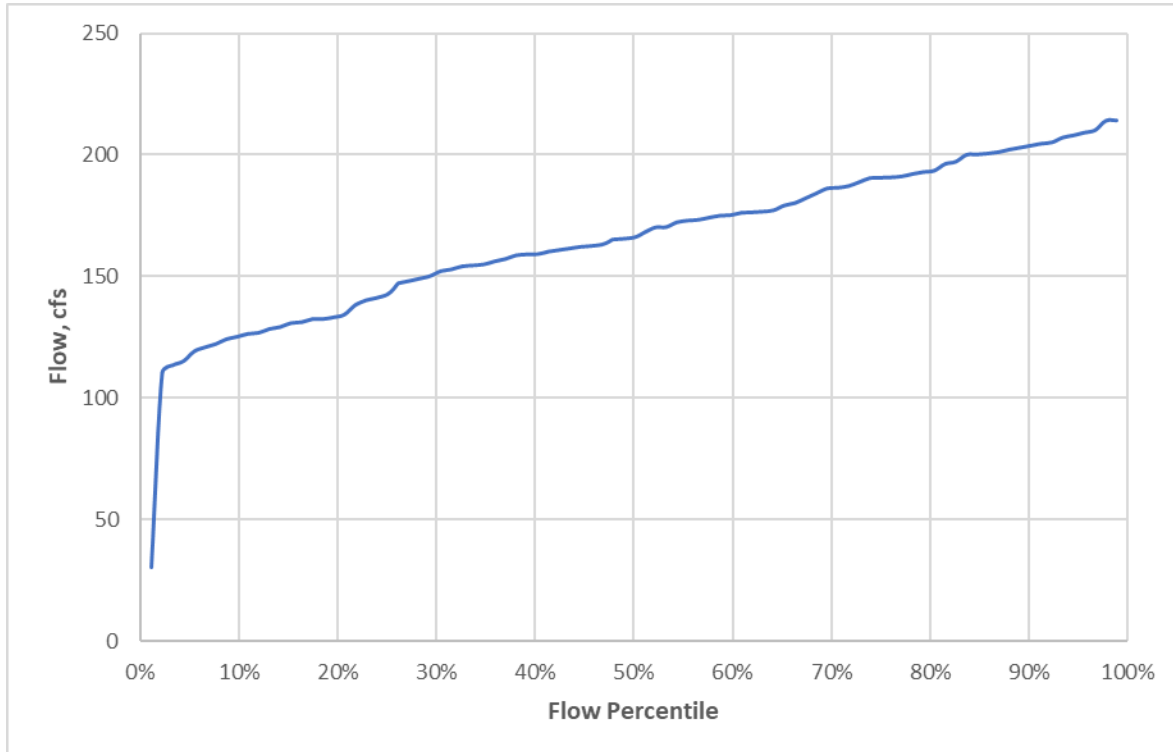


Figure 3-3. Flow Frequency Curve for Gainer Spring Group Composite Discharge

In order to determine the relative contributions of spring discharge to total flow in Econfina Creek, measured spring discharge was compared to total flow pickup between stations for the reach where the spring contributes to Econfina Creek flow. Based on Table 3-6, the combined Williford, Sylvan, and Econfina Blue spring groups median flow of 74 cfs represents approximately 57% of the median flow pickup (130 cfs) between the Walsingham Bridge and SR 20 stations. Based on Table 3-7, the Gainer Spring Group composite median flow of 167 cfs represents approximately 69% of the median flow pickup (242 cfs) between the SR 20 and CR 388 stations. The remaining 31% of pickup between these stations comes from a combination of surface runoff and diffuse groundwater flow.

Table 3-6. Median flow Comparison between SR 20 and Walsingham Bridge (cfs)

Econfina Creek at SR 20 median flow	Econfina Creek at Walsingham Bridge median flow	Difference in Median Flow Between Econfina Creek at SR 20 and Walsingham Stations	Combined Williford, Sylvan, and Econfina Blue spring groups median flow	Remaining flow pickup
264	134	130	74	56

Table 3-7. Flow Comparison among CR 388, SR 20, and Gainer Spring Group

Flow Percentile	Flow difference between CR 388 and SR 20	Gainer Spring Group composite flow	Remaining flow pickup
5%	185	120	65
10%	206	126	80
20%	232	135	97
30%	238	152	86
40%	240	159	81
50%	242	167	75
60%	252	176	76
70%	262	186	76
80%	273	193	80
90%	291	203	88
95%	313	208	105

3.4 Hydrologic Evaluation for USGS Station 2359500 Econfina Creek Near Bennett, FL

This section presents a detailed hydrologic evaluation of observed trends in flow and stage from USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388). The purpose of this evaluation was to determine the relationship between observed changes in flow and stage with changes in climatic conditions and groundwater levels in the vicinity of Econfina Creek. Additionally, hydrologic impacts associated with Hurricane Michael are also presented here. This hydrologic assessment was also used for determination of a representative baseline flow time series for Econfina Creek.

3.4.1 Trends in Baseflow, Seasonality, and Climatic Conditions

Daily average flow at the USGS station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) is shown in Figure 3-4. Flows at this location have been relatively stable over time, with no long-term increasing or decreasing trend although short-term fluctuations occur due to climatic variability. Average flow at this location over the period of record was 536 cfs with annual average flows ranging between 343 cfs and 741 cfs. Seasonality in flows at this location was assessed by comparing average monthly discharge for the period of record (Figure 3-5). Average monthly flow for Econfina Creek @ CR 388 was highest in March (572 cfs) and August (573 cfs) corresponding to periods of lower evapotranspiration rates in March and periods of higher rainfall in August. Average monthly flow for Econfina Creek @ CR 388 was lowest during May-June and October-November, with average flows around 500 cfs during these months.

In order to determine baseflow at Econfina Creek @ CR 388, the baseflow separation technique referred to as the “USF Method” developed by Perry (1995) was utilized, which is a low-pass filter for a specific time window. This method is a modified version of the USGS HYSEP baseflow separation technique allowing for modified window lengths to better represent baseflow processes typical of Florida streams. A 61-day averaging period was chosen to represent average baseflow processes in Econfina Creek, which represents 30 days prior to a specified date, the specified date, and 30 days after the specified date. A 61-day minimum flow is calculated on a daily basis moving forward one day at a time. After the minimum flow has been calculated for each day, a second 61-day moving window averages the minimum flows resulting in a smoothed time series that is assumed as baseflow. Baseflow for Econfina Creek @ CR 388 computed using the USF method with a 61-day window is shown in Figure 3-4. Due to sandy soils, high recharge rates, and karst hydrogeology in the study area, baseflow derived primarily from spring discharge in the middle reaches of Econfina Creek accounts for the majority of flow in Econfina Creek under low- to moderate-flow conditions. Average estimated baseflow at USGS 2359500 Econfina Creek Nr Bennett (CR 388) is 445 cfs, which represents 83% of the long-term average flow of 536 cfs.

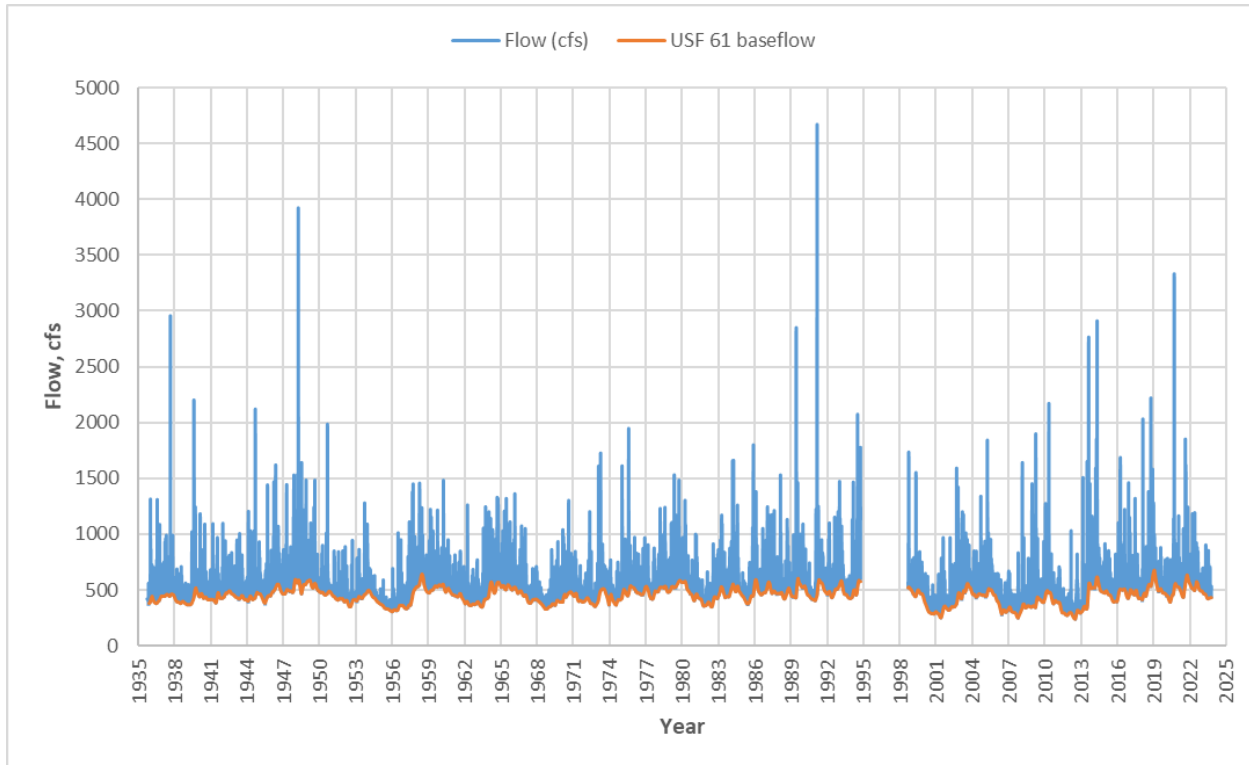


Figure 3-4. Daily Flow Hydrograph and Baseflow Hydrograph at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)

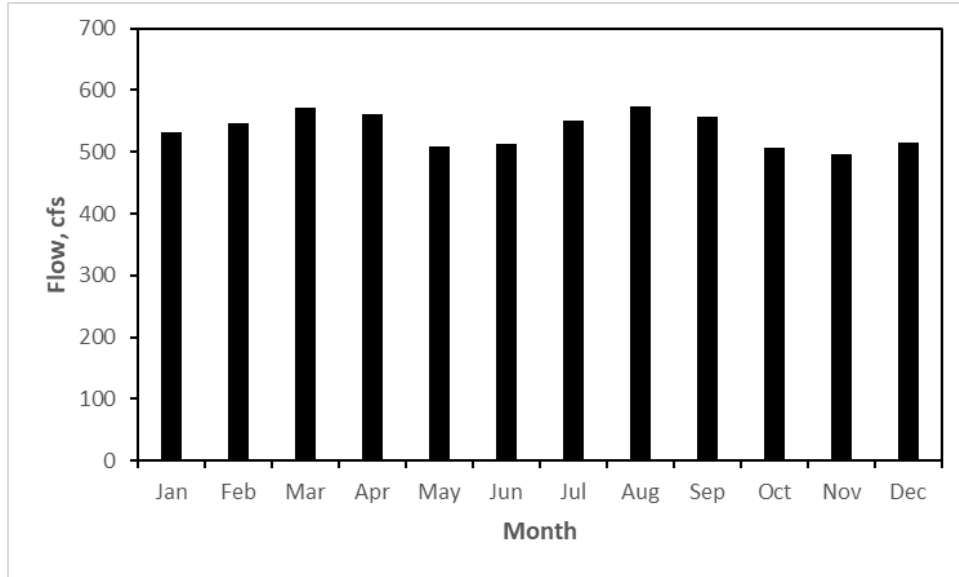


Figure 3-5. Average Monthly Flow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)

A careful examination of Figure 3-4 shows an increase in both baseflow and total flow at the Econfina Creek @ CR 388 station from January 2013 to present as compared to previous time periods, particularly the mid-2000s when several years of below-average flow occurred. A two-sample t-test showed average baseflow from January 2013-December 2021 (483 cfs) was statistically significantly higher than average baseflow from August 1998-December 2012 (381 cfs) based on a significance level of $\alpha=0.05$ (t Statistic=-65.45, df=9158, p-value ~ 0). To determine if increased baseflow correlates to climatic variability, baseflow was compared to historical cumulative precipitation and groundwater levels. Baseflow at Econfina Creek @ CR 388 was compared to the preceding two-year moving average monthly total rainfall from the National Weather Service station USC00086842 located in Panama City, Florida (Figure 3-6). A two-year moving average was utilized to account for the effect of antecedent rainfall conditions on baseflow. As demonstrated in Figure 3-6, fluctuations in baseflow are consistent with fluctuations in cumulative rainfall, although some variability is present, likely due to uncertainty in computed baseflow and differences in recharge rates and time of travel within the watershed, which may not correspond directly to a two-year moving average rainfall.

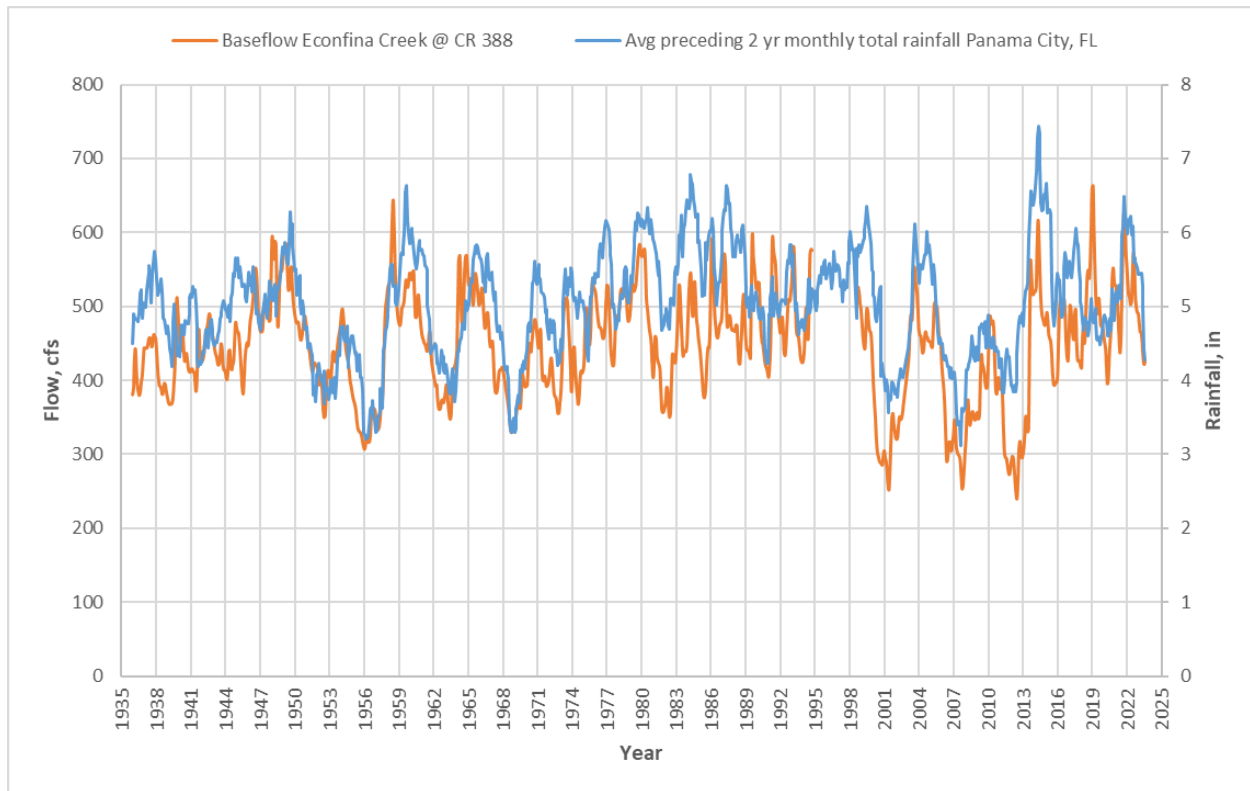


Figure 3-6. Baseflow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) versus Preceding Two-year Moving Average Monthly Total Rainfall from the National Weather Service Station USC00086842 Located in Panama City, Florida

In addition to precipitation, baseflow at Econfina Creek @ CR 388 was compared to groundwater levels from the Greenhead Floridan aquifer monitoring well (NWFID 3216) from 1998 to present (Figure 3-7). The Greenhead Floridan aquifer well has the longest groundwater level record in the vicinity of Econfina Creek and is generally representative of groundwater level patterns in the region. Similar to cumulative rainfall, fluctuations in baseflow are consistent with fluctuations in regional groundwater levels. A linear regression between baseflow and groundwater levels showed a consistent relationship between the two variables from 1998-present, with an R^2 value of 0.8223 (Figure 3-8).

Analysis of baseflow, cumulative rainfall, and groundwater levels at the Greenhead monitoring well shows consistent increase in all three variables from January 2013 to present compared to the period of 1998 to 2013, which included several years of below average rainfall. Observed total annual rainfall in 2013 was 87 in. which is the highest annual total on record for the Panama City station. The average annual rainfall for this station is 59 in. This high rainfall during 2013 contributed to an increase in both groundwater levels and corresponding baseflow from January 2013 to present. Recently, rainfall has been above average, with observed total annual rainfall of 69 in. for 2020. Rainfall was well above average in 2021 (74 in.), including 20 in. recorded for August 2021 compared to the long-term average of 7.8 in for August for this station. As a result, groundwater levels and baseflow have remained elevated. Similar conditions of above average rainfall and elevated baseflow were observed in the 1970s and 1980s suggesting that current conditions, although occurring infrequently, are not atypical for this region (Figure 3-4).

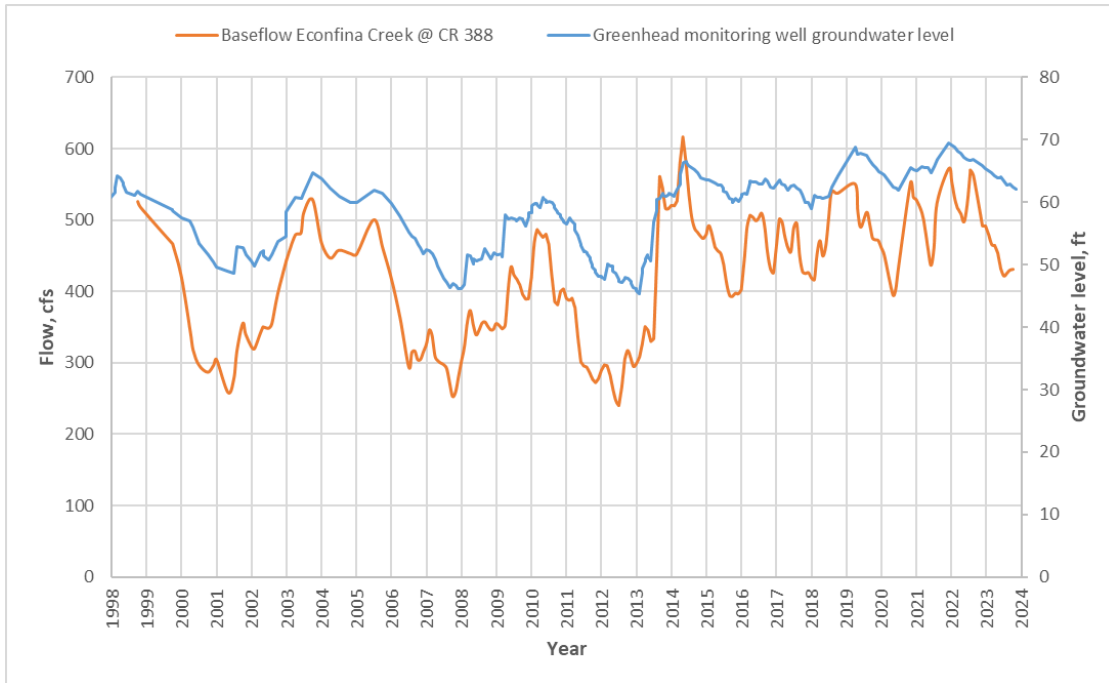


Figure 3-7. Baseflow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) versus Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to Present

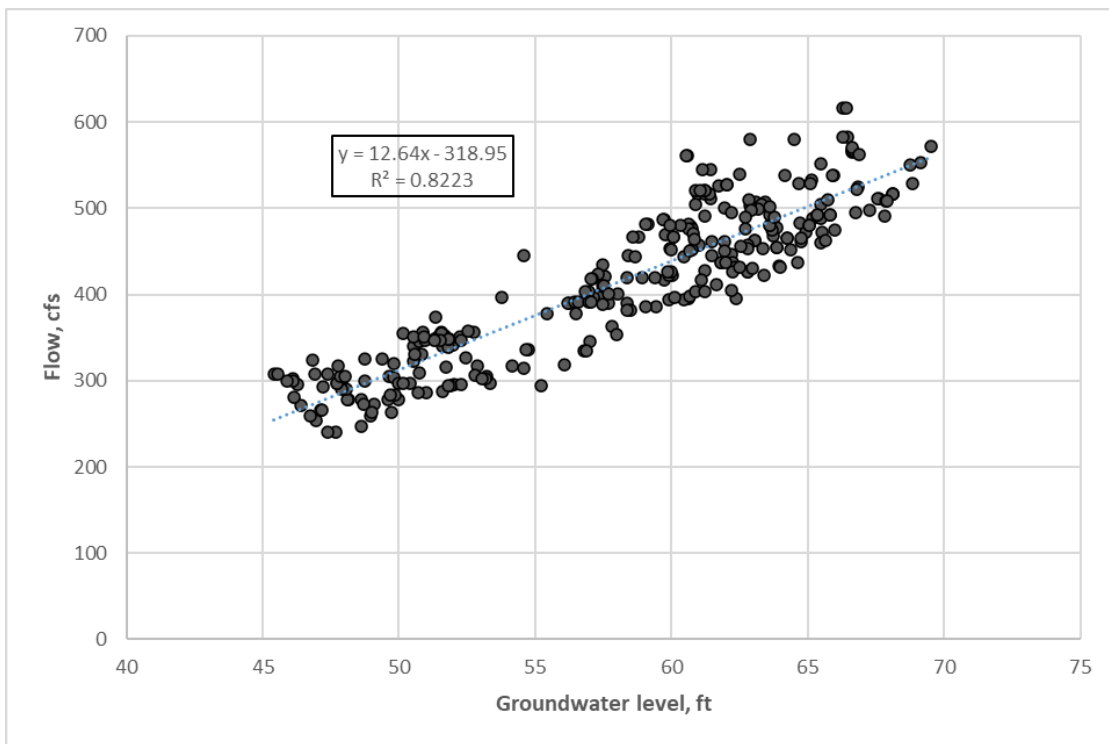


Figure 3-8. Linear Regression Between Baseflow at the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) and Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to Present

3.4.2 Flow Frequencies Post-Hurricane Michael

Flow frequency curves were developed for Econfina Creek @ CR 388 to determine the extent and nature of increased flows post-Hurricane Michael as compared to the historical record prior to the hurricane (Figure 3-9). Figure 3-9 shows flows have been higher across all flow percentiles post-Hurricane Michael (after 10/10/2018) as compared to the historical period of record. Flow increases are on the order of 50-100 cfs for most flow percentiles. This is consistent with the analysis shown in the previous section, indicating that flows have increased from 2013 to 2023 due to above average rainfall and elevated groundwater levels.

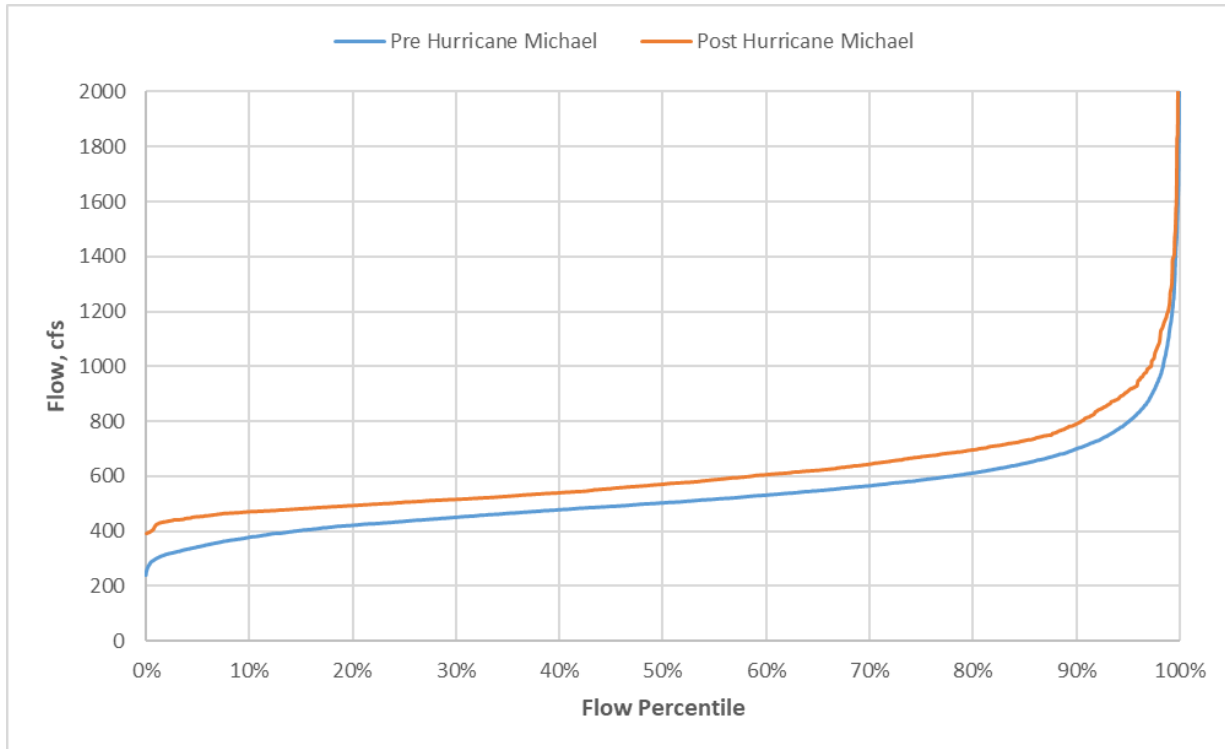


Figure 3-9. Flow Frequency Curve for the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)

To further investigate the nature of observed flow increases post-Hurricane Michael, flow frequencies for the surface water component of total flow were determined. Flow for Econfina Creek can be divided into two components: baseflow derived primarily from spring discharge and surface water runoff derived primarily from surface runoff. Surface water runoff was determined as the difference between daily average streamflow and estimated baseflow from the USF 61 methodology described previously. As shown in Figure 3-10, flow frequencies for surface water inputs along Econfina Creek are similar pre- and post-Hurricane Michael, indicating that increased baseflow is the primary contributor of increased flows post-Hurricane Michael. This indicates that observed increased flows post-Hurricane Michael are largely due to climatic factors.

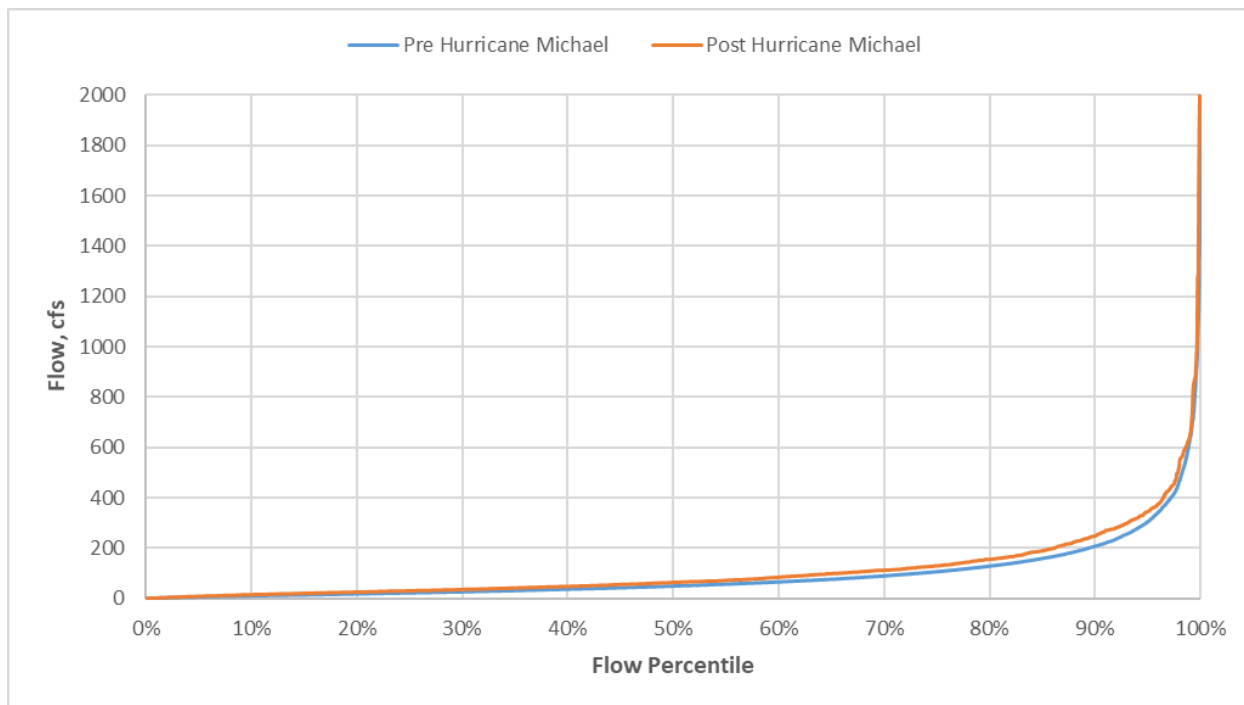


Figure 3-10. Flow Frequency Curve for Surface Water Inputs for the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)

3.4.3 Stage Discharge Relationships Post-Hurricane Michael

Large amounts of debris fell into Econfina Creek and surrounding floodplain areas from Hurricane Michael, causing changes to the hydrology of Econfina Creek. Downed trees in the channel and floodplain resulted in less conveyance area, resulting in slower water velocities and increased river stage for a given flow. In hopes of restoring Econfina Creek to pre-hurricane conditions, debris was removed from portions of the main channel of Econfina Creek, within the MFL study area. No debris removal was conducted in the floodplains.

Analysis of stage-discharge relationships was conducted for three periods, shown in Figure 3-11:

- Pre-hurricane conditions (before 10/10/2018)
- Post-hurricane conditions prior to completion of debris clearing (10/10/2018-3/31/2019)
- Post-hurricane conditions after completion of debris clearing (4/1/2019-present)

Review of Figure 3-11 shows substantial increases in stage for a given flow following Hurricane Michael as compared to historical conditions pre-hurricane. However, upon completion of debris removal in the Econfina Creek channel, the stage-discharge relationship returned to conditions similar to historical, although stages remain slightly elevated for a given flow, likely due to remaining debris upstream and/or in the floodplain. This indicates the benefit of debris removal in restoring historical hydrologic regimes of Econfina Creek, and reducing flooding risk in the vicinity. Similar results were achieved in other sections along Econfina Creek and Chipola River where debris removal efforts commenced (NFWFMD 2020). Likewise, areas where debris removal efforts were not conducted show continued elevated stages relative to historical conditions. Therefore, continued debris removal efforts in affected areas by Hurricane

Michael would be anticipated to further restore historical hydrologic regimes of Econfina Creek and surrounding waterbodies, and potentially reduce flooding risk in the vicinity.

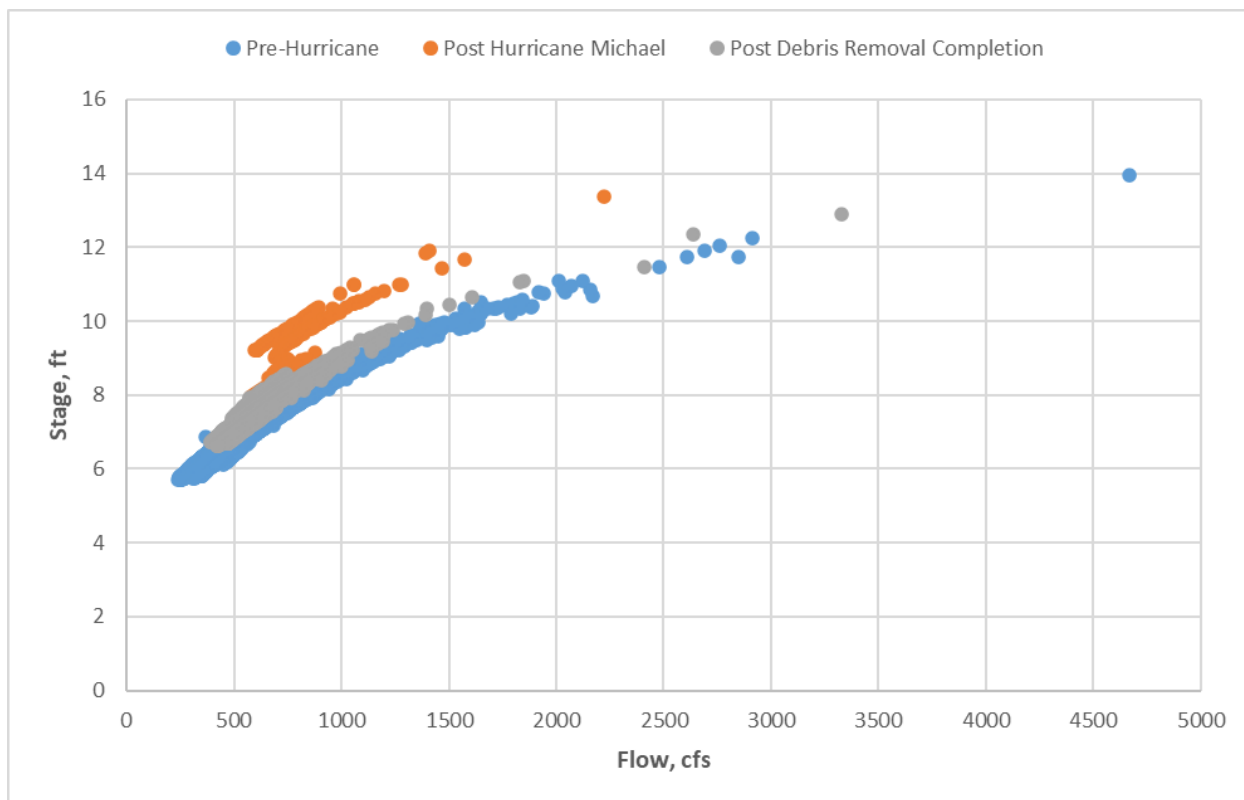


Figure 3-11. Comparison of Stage-Discharge Relationships for the USGS Station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)

3.5 Hydrologic Evaluation for NFWMD Station 8458 Econfina Creek @SR 20

This section presents a detailed hydrologic evaluation of observed trends in flow and stage from NFWMD station 8458 Econfina Creek @SR 20. The purpose of this evaluation was to determine the relationship between observed changes in flow and stage with changes in climatic conditions and groundwater levels in the vicinity of Econfina Creek. Additionally, hydrologic impacts associated with Hurricane Michael are also presented here. This hydrologic assessment was also used for determination of a representative baseline flow time series for Econfina Creek.

3.5.1 Trends in Baseflow, Seasonality, and Climatic Conditions

Daily average flow at the NFWMD station 8458 Econfina Creek @ SR 20 is shown in Figure 3-12. Similar to Econfina Creek @ CR 388, flows at this location have been relatively stable over time, with no long-term increasing or decreasing trend although short-term fluctuations can occur due to climatic variability. Average flow at this location over the period of record was 284 cfs with annual average flows ranging between 148 cfs (2007) and 408 cfs (2021). Seasonality in flows at this location was assessed by comparing average monthly discharge for the period of record (Figure 3-13). Average monthly flow for Econfina Creek @ SR 20 was highest in April (306 cfs) corresponding to a period of lower evapotranspiration rates.

Average monthly flow for Econfina Creek @ CR 388 was lowest during October-November, with average flows around 260 cfs during these months.

Baseflow for Econfina Creek @ SR 20 computed using the USF method with a 61-day window is shown in Figure 3-12. Due to sandy soils, high recharge rates, and karst hydrogeology, baseflow derived primarily from spring discharge in the middle reaches of Econfina Creek accounts for the majority of flow for this station under low to moderate flow conditions. Average baseflow over the period of record is 224 cfs, which represents 79% of the long-term average flow of 284 cfs.

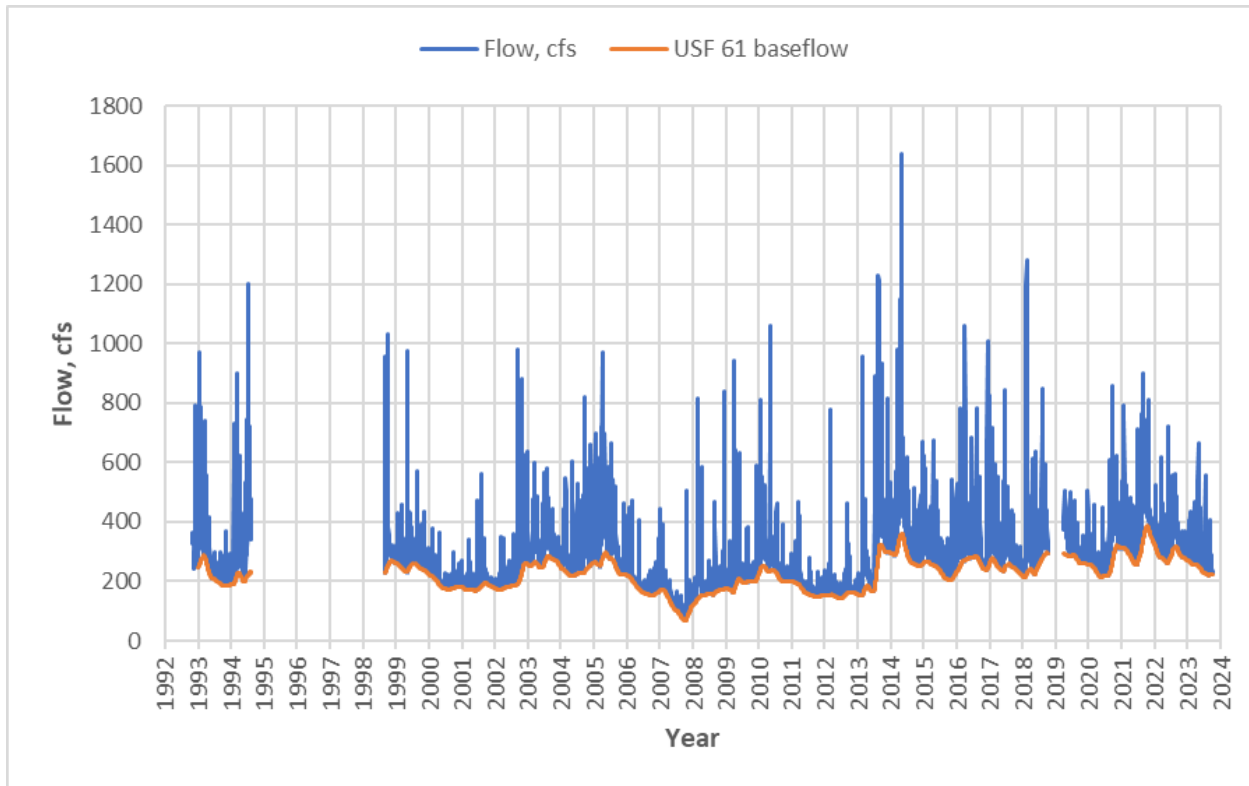


Figure 3-12. Daily Flow Hydrograph and Baseflow Hydrograph at the NFWMD Station 8458 Econfina Creek @ SR 20

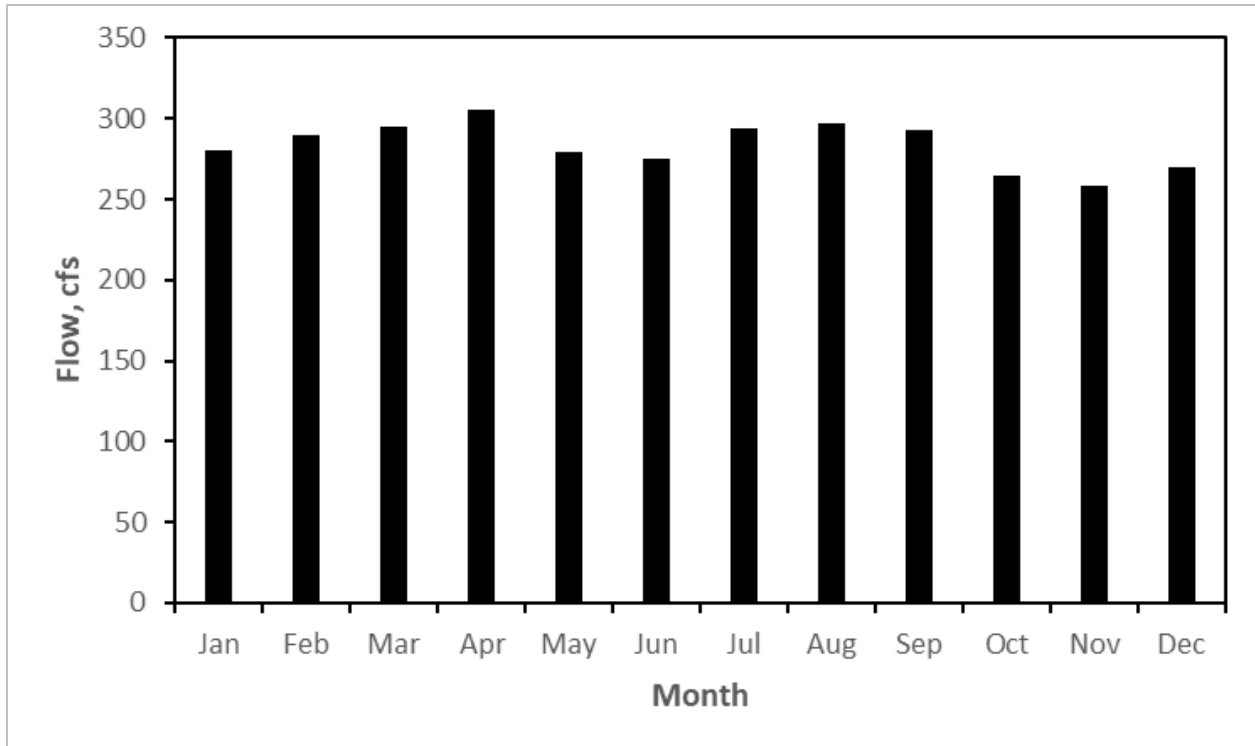


Figure 3-13. Average Monthly Flow at NFWMD Station 8458 Econfina Creek @ SR 20

Similar to Econfina Creek @ CR 388, both total streamflow and baseflow for Econfina Creek @ SR 20 increased from January 2013-2023 as compared to previous time periods due to periods of above average rainfall including record rainfall in 2013. Baseflow at Econfina Creek @ SR 20 was compared to groundwater levels from the Greenhead Floridan monitoring well (NWFID 3216) from 1998 to present (Figure 3-14). Figure 3-14 shows trends in Econfina Creek @ SR 20 baseflow are consistent with regional groundwater level trends. A linear regression between baseflow and groundwater levels showed a consistent relationship between the two variables from 1998 -2023, with an R^2 value of 0.8127 (Figure 3-15).

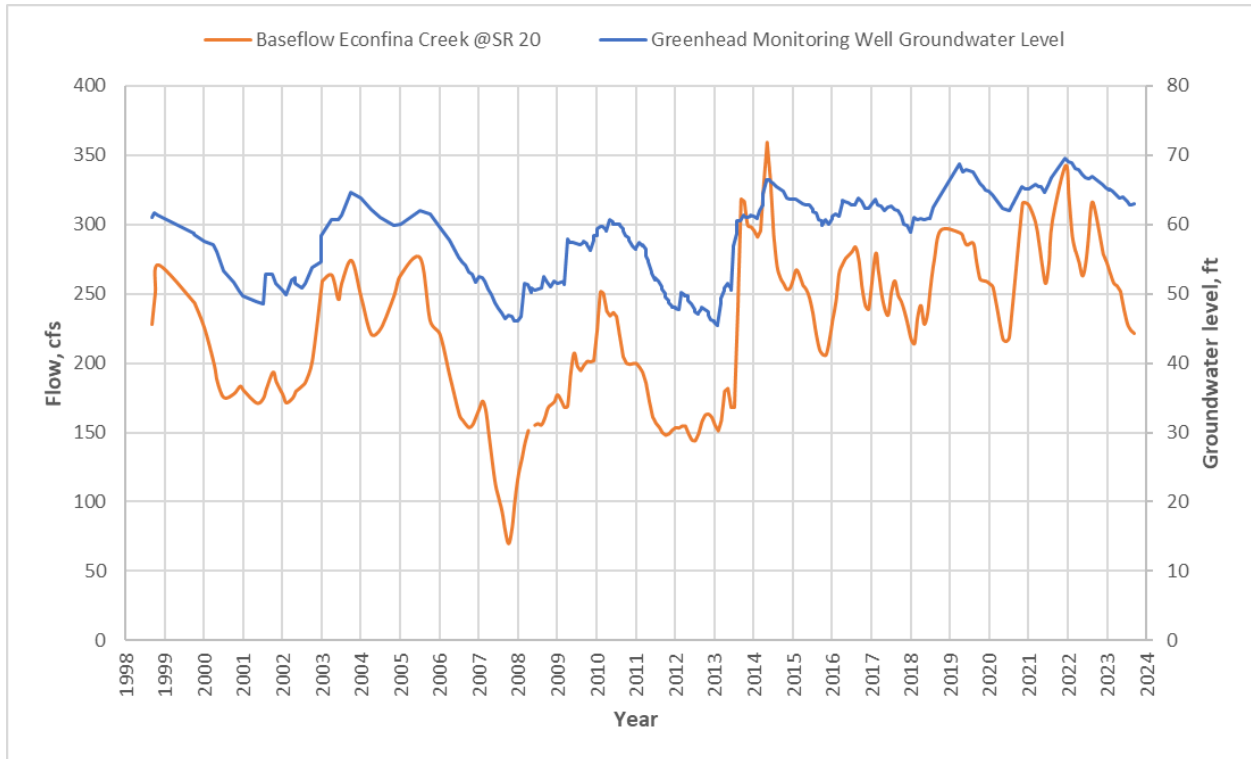


Figure 3-14. Baseflow at the NFWFMD Station 8458 Econfina Creek @ SR 20 versus Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to 2023

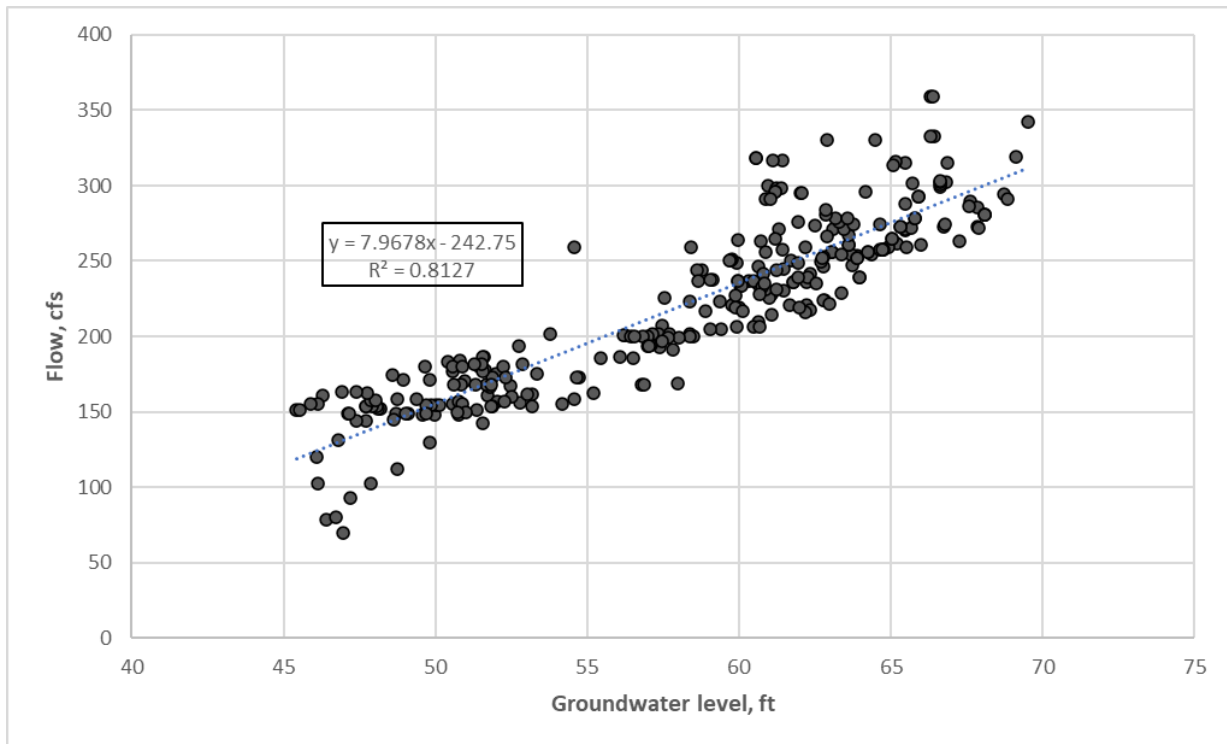


Figure 3-15. Linear Regression Between Baseflow at the NFWFMD Station 8458 Econfina Creek @ SR 20 and Groundwater Level at Greenhead Floridan Monitoring Well (NWFID 3216) from 1998 to 2023

3.5.2 Flow Frequencies Post-Hurricane Michael

Similar to Econfina Creek @ CR 388, flow frequency curves were developed for the Econfina Creek @ SR 20 station to determine the extent and nature of increased flows post-Hurricane Michael as compared to the historical record prior to the hurricane (Figure 3-16). Figure 3-16 shows flows have been higher across all flow percentiles post-Hurricane Michael (after 10/10/2018) as compared to the historical period of record. Flow increases are on the order of 50-100 cfs for most flow percentiles. This is consistent with the analysis conducted for CR 388, indicating that flows have increased from 2013 - 2023 due to above average rainfall and elevated groundwater levels.

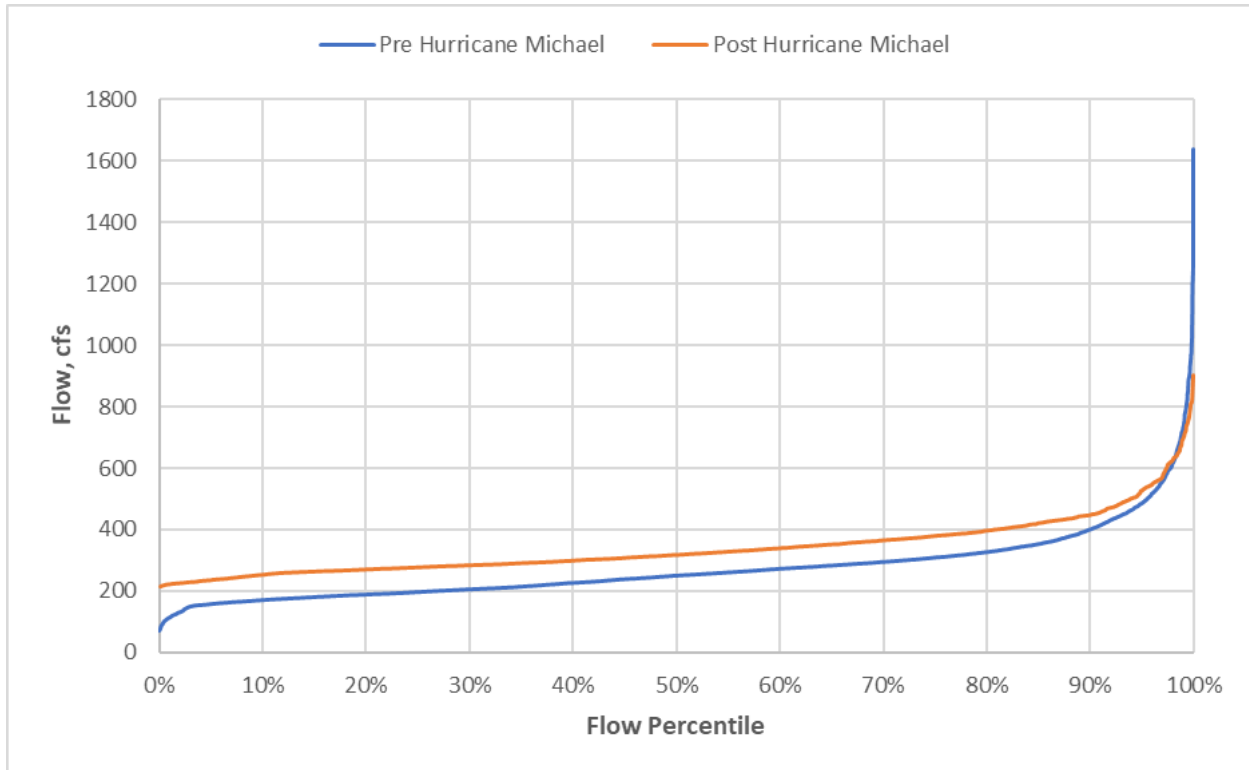


Figure 3-16. Flow Frequency Curve for the NFWMD Station 8458 Econfina Creek @ SR 20

Similar to Econfina Creek @ CR 388, flow frequencies for the surface water component of total flow were determined for Econfina Creek @ SR 20 to further investigate the nature of observed flow increases post-Hurricane Michael. Surface water runoff was determined as the difference between daily average streamflow and estimated baseflow from the USF 61 methodology described previously. As shown in Figure 3-17, flow frequencies for surface water inputs at Econfina Creek @ SR 20 are similar pre and post-Hurricane Michael, indicating increased baseflow is a primary contributor of increased flows post-Hurricane Michael.

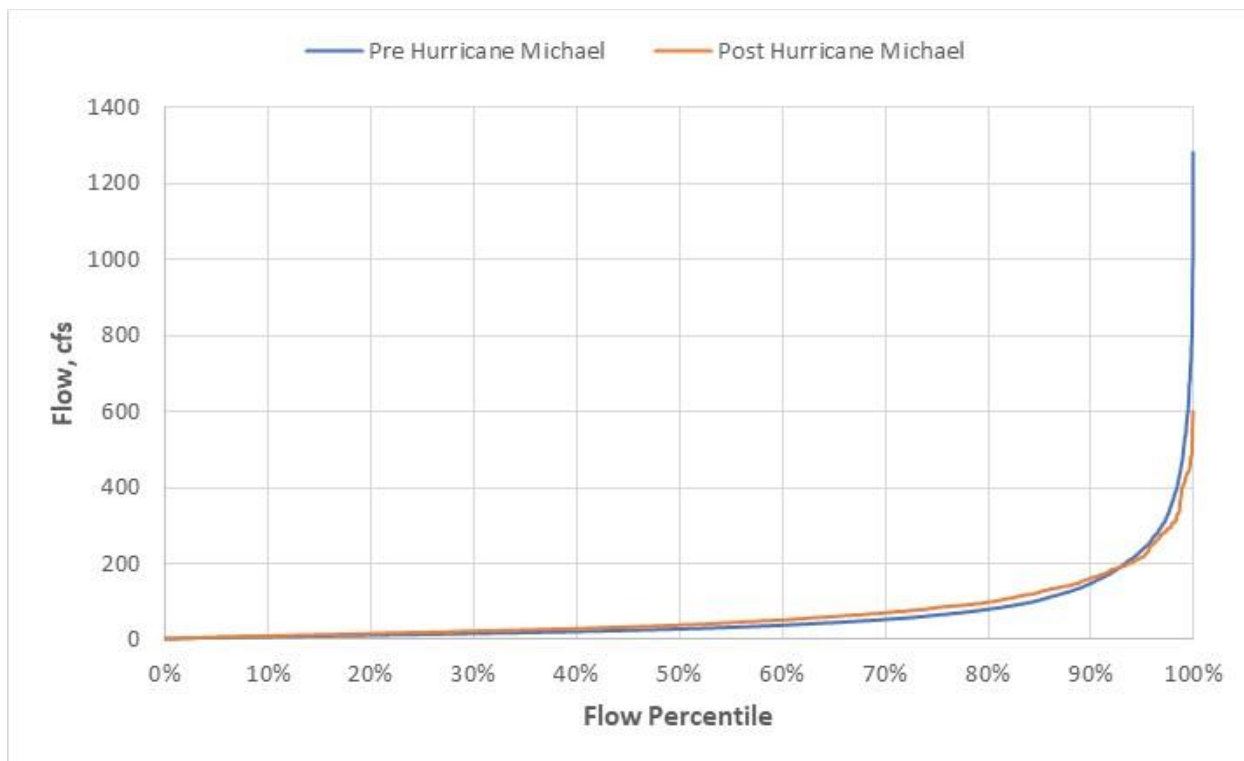


Figure 3-17. Flow Frequency Curve for Surface Water Inputs for the NFWMD Station 8458 Econfina Creek @ SR 20

3.5.3 Stage-Discharge Relationships Post-Hurricane Michael

Large amounts of debris fell into Econfina Creek and surrounding floodplain areas from Hurricane Michael, causing changes to the hydrology of Econfina Creek. Downed trees in the channel and floodplain resulted in less conveyance area for a given flow, resulting in slower water velocities and increased river stage. In hopes of restoring the Econfina Creek to pre-hurricane conditions, debris was removed from portions of the main channels of Econfina Creek, including the MFL study area. No debris removal was conducted in the floodplains.

Analysis of stage- discharge relationships was conducted for two periods, shown in Figure 3-18:

- Pre-hurricane conditions (before 10/10/2018)
- Post-hurricane conditions after completion of debris clearing (3/30/2019-present)

Data from 10/10/2018/3/29/2019 was unavailable at this station due to damage from the storm. Review of Figure 3-18 shows the stage-discharge relationship upon completion of debris removal in the Econfina Creek channel similar to historical, although stages remain slightly elevated, likely due to remaining debris in the floodplain. This result is consistent with that for Econfina Creek @ 388 as well as in sections along Chipola River where debris removal efforts commenced (NFWMD 2020). Likewise, areas where debris efforts were not conducted show continued elevated stages relative to historical conditions. This indicates the benefit of debris removal in restoring historical hydrologic regimes of Econfina Creek, and reducing flooding risk in the vicinity.

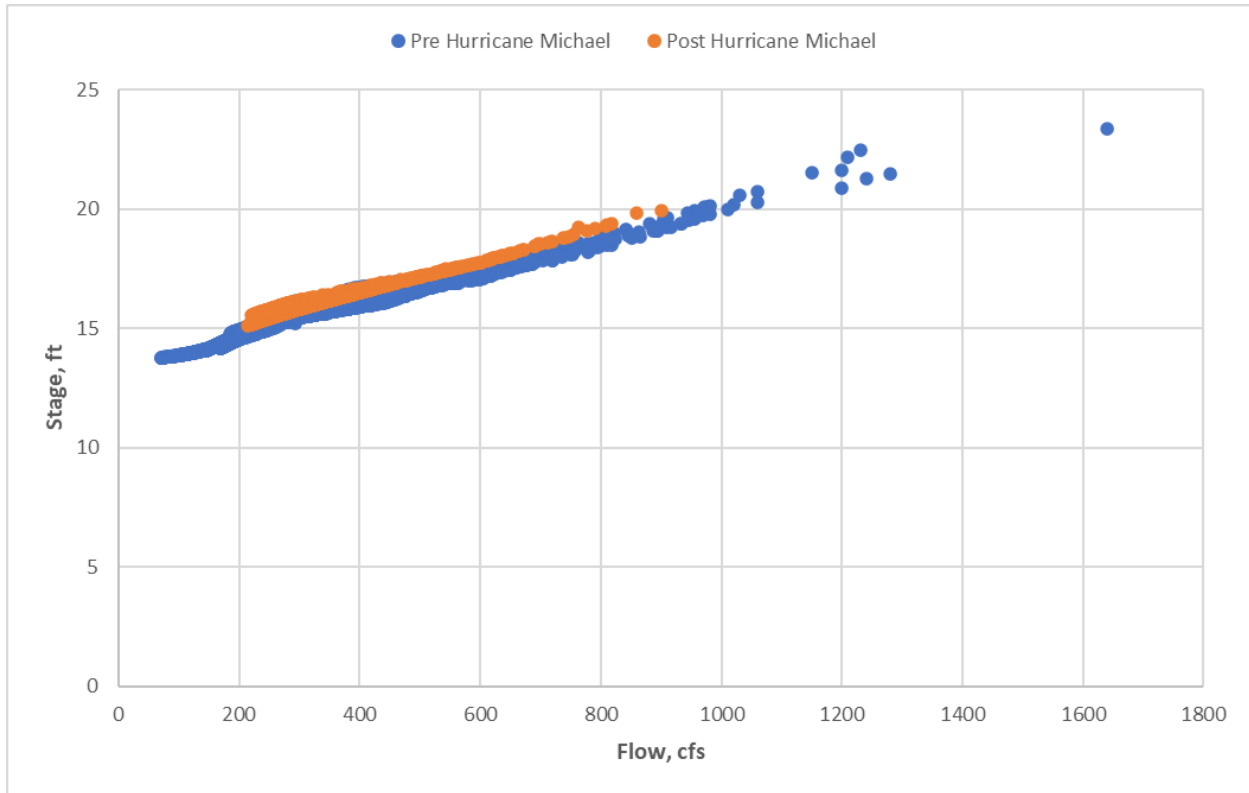


Figure 3-18. Comparison of Stage-Discharge Relationships for the NFWMD Station 8458 Econfina Creek @ SR 20

3.6 Gainer Spring Group Discharge Trends

Trends in Gainer Spring Group discharge were assessed using a Mann-Kendall trend test. The Mann Kendall trend test was based on annual median discharge to reduce the effect of serial correlation. Results of the trend test showed a statistically significant increasing trend from 2002-2022, based on a based on a significance level of $\alpha=0.05$ (Kendal tau =0.533, p-value= 0.0008). The observed increase in spring discharge is likely due to increased precipitation, with several drought periods occurring toward the beginning of discharge record analyzed in the 2000s, and several years of above-average rainfall occurring from 2013-2022. A two-sample t-test showed average Gainer Spring Group discharge from January 2013-June 2022 (186 cfs) was statistically significantly higher than average Gainer Spring Group discharge from January 2002-December 2012 (149 cfs) based on a significance level of $\alpha=0.05$. Increases in Gainer Spring Group discharge beginning in January 2013 are consistent with trends presented previously for Econfina Creek stream flow and baseflow, as well as groundwater levels in the vicinity. Summary statistics for Gainer Spring Group composite discharge are presented in Table 3-8. Gainer Spring Group composite discharge measurements are presented for the full period of record in Figure 3-19 and for 2002-2022 in Figure 3-20.

Table 3-8. Gainer Spring Group Composite Discharge Summary Statistics

Time Period	Number of Discharge Measurements	Average	Median	Minimum	Maximum
Period of Record	92	165	167	30	224
2002-2022	85	166	170	30	224
2002-2013	46	149	155	30	214
2013-2022	39	186	190	110	224

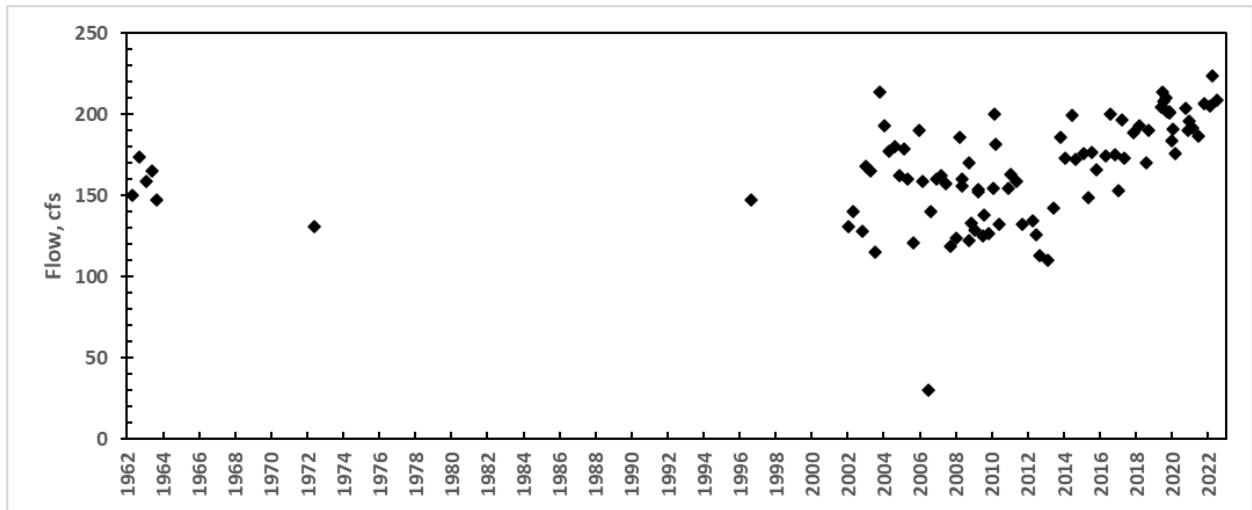


Figure 3-19. Gainer Spring Group Composite Discharge Measurements (1962-2022)

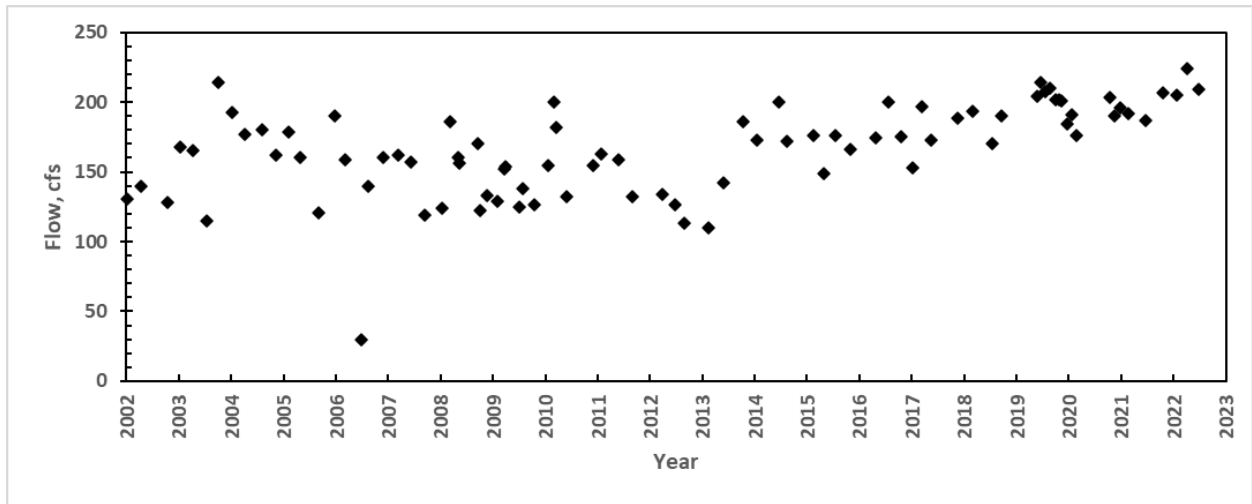


Figure 3-20. Gainer Spring Group Composite Discharge Measurements (2002-2022)

3.7 Groundwater Withdrawals and Considerations for Baseline Flow Records

The best available data was utilized to determine groundwater withdrawals within the contribution area. District staff compiled or estimated groundwater withdrawals for public supply (PS), industrial/commercial/institutional (ICI), domestic self-supply (DSS), recreation (REC), and agriculture (AG) water use categories for the years 2015 and 2020 as well as 2045 projections. Groundwater withdrawal estimates prior to 2015 were not determined since Florida Statewide Agricultural Irrigation Demand (FSAID) agriculture estimates before 2015 were unavailable.

3.7.1 Public Supply, Industrial/Commercial/Institutional, and Recreation Groundwater Withdrawals

Groundwater withdrawals for PS, ICI, and REC water use categories within the middle Econfina Creek GWCA were developed by District staff. These estimates were derived from reported groundwater withdrawals by permittees with Individual Water Use Permits (IWUPs). Groundwater withdrawals are reported and stored in the District’s hydrologic database at the station level, where a station generally represents an individual well. Quality assurance/quality control (QA/QC) measures were taken to ensure accuracy of groundwater withdrawal data in the District’s hydrologic database for years 2015 and 2020. This includes ensuring all provided records were entered into the District’s database and cross-checking totals with independent IWUP pumpage audits performed by regulatory staff. No permitted power generation use is contained within the middle Econfina Creek GWCA.

Groundwater withdrawal estimates for year 2045, for PS, ICI, and REC water use categories, were determined based on projected water use by category and county from the 2023 NFWFMD Water Supply Assessment (WSA) (NFWFMD 2023). The rates of change for the PS, REC, and ICI categories, by county, are shown in Table 3-9. Rates of change from the 2020 base year estimates to projected 2045 use from this assessment were applied to the 2020 withdrawal estimates per county and use type within the middle Econfina Creek GWCA to determine 2045 projections within the middle Econfina Creek GWCA. This calculation is shown in Table 3-10. ICI within the Bay County portion of the middle Econfina Creek GWCA was held constant from 2020 to 2045 since the projected decrease is due in large part to a single large facility ceasing operations located outside the GWCA.

Table 3-9. Water Use Projections for Counties Within Middle Econfina Creek GWCA from 2023 NFWFMD Water Supply Assessment (NFWFMD 2023)

Bay County				
Use Category	Estimates 2020, mgd	Projections 2045, mgd	2020-2045 mgd	Change %
Public Supply	29.36	33.65	4.29	14.6%
ICI	26.48	6.54	(19.94)	-75.3%
Recreation	2.15	2.56	0.41	19.0%

Washington County				
Use Category	Estimates 2020, mgd	Projections 2045, mgd	2020-2045 mgd	Change %
Public Supply	1.01	1.10	0.09	8.6%
ICI	0.28	0.59	0.31	109.9%
Recreation	0.31	0.34	0.03	10.9%

Table 3-10. Estimated 2045 Water Use Projections for Portion of Counties Within Middle Econfina Creek GWCA

Bay County				
Use Category	Estimated use within GWCA 2015, mgd	Estimated use within GWCA 2020, mgd	County Wide Percent change 2020-2045 from WSA 2023 %	Estimated projected use, within GWCA 2045, mgd
Public Supply	0	0	14.6%	0
ICI*	0.001	0.007	n/a	0.007
Recreation	0	0.003	19.0%	0.004

Washington County				
Use Category	Estimated use within GWCA 2015, mgd	Estimated use within GWCA 2020, mgd	County Wide Percent change 2020-2045 from WSA 2023 %	Estimated projected use, within GWCA 2045, mgd
Public Supply	0.001	0.001	8.6%	0.001
ICI	0.386	0.264	109.9%	0.554
Recreation	0	0	10.9%	0

TOTAL USE				
County	Estimated use within GWCA 2015, mgd	Estimated use within GWCA 2020, mgd	County Wide Percent change 2020-2045 from WSA 2023 %	Estimated projected use, within GWCA 2045, mgd
Bay	0.001	0.010	n/a	0.011
Washington	0.387	0.265		0.555
Middle Econfina Creek GWCA Total	0.388	0.275	n/a	0.566

*ICI use held constant for Bay County portion of middle Econfina Creek GWCA

3.7.2 Domestic Self-Supply Groundwater Withdrawals

The domestic self-supply (DSS) category includes individual residences supplied by private wells. Groundwater withdrawal estimates for DSS are typically evaluated at the county level. DSS for individual residences is not regulated through the District’s Water Use Permitting program and is therefore not reported to the District. However, groundwater withdrawals were estimated for this category as it may comprise a significant percent of total groundwater withdrawals in some areas.

The 2015 and 2020 county-wide DSS estimates from the District’s 2018 and 2023 Water Supply Assessment updates were utilized for this analysis (NFWFMD 2018, NFWFMD 2023) (Table 3-11). These estimates were utilized to ensure consistency with recently published District groundwater withdrawal

estimates. All estimated DSS use is assumed to be from groundwater sources. Additionally, 2045 county-wide projected DSS estimates from the 2023 Water Supply Assessment updates were utilized for this analysis (NFWFMD 2023).

County DSS groundwater withdrawal estimates were spatially distributed uniformly to all active DSS wells per county. Active DSS wells were determined based on a query of the District’s well construction inventory. Although the exact number of wells actively being used for DSS groundwater withdrawal is unknown, several fields within the well construction inventory were utilized to determine a reasonable estimate of actively used wells, including:

- Including only well permits issued for domestic self-supply water use
- Removing wells associated with an IWUP
- Including wells with an active construction permit and excluding wells with an abandonment permit

DSS groundwater withdrawals were assigned to each well based on county and year constructed for 2015 and 2020. Groundwater withdrawals were distributed uniformly among all active DSS wells for each county and year. Wells constructed after a given year were not assigned groundwater withdrawal for that year. For example, a well-constructed in 2020 would be assigned groundwater withdrawal for 2020 but not for 2015. All wells constructed in the year 2020 or earlier were utilized for spatial distribution of 2045 county level DSS projections to individual well locations. A spatial selection was performed in ArcGIS to determine the subset of DSS wells within the middle Econfina Creek GWCA. DSS use within Econfina GWCA was determined as the summation of water use for this subset of wells (Table 3-12). A total of 3,076 active DSS wells were estimated to be within the middle Econfina Creek GWCA.

Table 3-11. DSS Water Use Estimates and Projections for Counties Within Middle Econfina Creek GWCA from 2018 and 2023 NFWFMD Water Supply Assessment (NFWFMD 2018, NFWFMD 2023)

County	Estimates 2015, mgd	Estimates 2020, mgd	Projections 2045, mgd
Bay	1.58	2.39	1.94
Washington	1.67	1.70	1.84

Table 3-12. DSS Water Use Estimates and Projections for DSS Wells Within Middle Econfina Creek GWCA

County	Estimates 2015, mgd	Estimates 2020, mgd	Projections 2045, mgd
Bay	0.26	0.40	0.32
Washington	0.46	0.47	0.51
Middle Econfina Creek GWCA Total	0.72	0.87	0.83

3.7.3 Agriculture Groundwater Withdrawals

Since some agricultural water users are not required to report withdrawals to the District, using only reported data will underestimate agricultural water use. Starting in 2013, the Florida Statewide Agricultural Irrigation Demand (FSAID) project was initiated as a joint effort between Florida Department of Agricultural and Consumer Services (FDACS) and all five water management districts to estimate and project agricultural water demands throughout the entire state of Florida. Estimates are developed and updated on an annual basis providing baseline estimates and projections every five years for a 20-year horizon. The end-product of the FSAID project is a GIS dataset of irrigated areas with attributes specifying crop type and baseline and projected water demand. Aggregate information by county and water management district is also provided. (For details, please refer to FDACS 2015, and FDACS 2022).

For this analysis, agricultural water demands contained within the Irrigated lands geodataset from FSAID II (for 2015 AG use estimates) and FSAID IX (for 2020 AG use estimates and 2045 projections) was utilized to estimate groundwater withdrawals within the middle Econfinia Creek GWCA (FDACS 2015, FDACS 2022). A spatial selection was performed in ArcGIS to determine the subset of irrigated lands within the middle Econfinia Creek GWCA. All AG water use was assumed to be derived from groundwater sources within this region. Agricultural water use is minimal in this region, with only five irrigated fields present in 2015 and two irrigated fields present in 2020 and 2045 (Table 3-13).

Table 3-13. Agriculture Water Use Estimates and Projections for Irrigated Fields Within Econfinia GWCA

County	Estimates 2015, mgd	Estimates 2020, mgd	Projections 2045, mgd
Bay	0.05	0.01	0.01
Washington	0	0	0
Middle Econfinia Creek GWCA Total	0.05	0.01	0.01

3.7.4 Groundwater Withdrawal Summary

Withdrawals within the middle Econfinia Creek GWCA are presented in Table 3-14 for 2015 and 2020 as well as 2045 projections. Due to the majority of the groundwater contribution area comprising public lands including the Econfinia Creek Water Management Area, withdrawals are minimal. Total groundwater withdrawals within the middle Econfinia Creek GWCA were 1.16 mgd in 2015, and 1.15 mgd in 2020. This area is expected to remain mostly undeveloped, with projected groundwater withdrawals of 1.41 mgd in 2045.

Table 3-14. Groundwater Withdrawal Estimates and Projections Within Middle Econfinia Creek GWCA

Water Use Category	Estimates 2015, mgd	Estimates 2020, mgd	Projections 2045, mgd
PS, ICI, REC	0.39	0.28	0.57
DSS	0.72	0.87	0.83
AG	0.05	0.01	0.01
Middle Econfinia GWCA Total (mgd)	1.16	1.15	1.41
Middle Econfinia GWCA Total (cfs)	1.79	1.78	2.18

3.7.5 Considerations for Baseline Flow Record

The Econfinia Creek baseline flow record was determined by adjusting the historical reference flow record for USGS station 2359500 Econfinia Creek Near Bennett, FL (Econfinia Creek @ CR 388) adding in estimated 2020 withdrawals in the contribution area of 1.15 mgd (1.78 cfs) to all flows in the historical record. This serves as a conservative estimate of withdrawal impacts on Econfinia Creek baseline flows as the observed effects of these pumping volumes on Econfinia Creek baseflow would most likely be considerably lower due to the distance of groundwater withdrawals from the creek. Based on the evaluation presented in this section, the full period of record of continuous discharge measurements for all Econfinia Creek surface water stations was determined to represent reference conditions for this system. Additionally, the full period of record of manual discharge measurements for Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group were utilized to represent reference conditions for these springs.

4 Water Resource Values and Metric Determination

The following section presents the consideration of water resource values utilized in the MFL evaluation of middle Econfina Creek inclusive of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, and the metrics designed to maintain and protect the ecology and water resources of the system. Quantitative data analyses and the methodology for determining the minimum flows that are protective of WRV metrics are provided in Sections 5 and 6.

Section 62-40.473, Florida Administrative Code, lists 10 environmental or water resource values (WRVs) that must be considered in the establishment of MFLs (Table 1-1). While all listed WRVs must be considered, not all may be appropriate for establishing minimum flows for middle Econfina Creek including Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. To determine which WRVs were most appropriate for these springs, District staff reviewed each WRV based upon three criteria:

1. Potential for significant harm to the WRV as a result of spring flow reductions
2. Relevance to middle Econfina Creek and Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group and associated spring runs
3. Measurable, quantifiable relationship with flow, and can be characterized with available data

All WRVs are discussed below with respect to the three criteria listed above. For each WRV determined to be relevant for establishment of MFLs for middle Econfina Creek, one or more quantifiable indicators were identified to evaluate the potential for significant harm. For each indicator, a quantifiable metric was determined as the limiting or critical value of a given indicator beyond which significant harm to the waterbody would be experienced.

4.1 Recreation In and On the Water

Econfina Creek provides extensive recreational opportunities including boating, swimming, tubing, and fishing. As indicated previously, the District operates and maintains several recreation areas within the Econfina Creek Water Management Area including the Pitt and Sylvan Spring and Williford Spring recreation areas. The 10-acre Pitt and Sylvan Spring recreation area includes a trail and boardwalk system leading from Pitt Spring to the Sylvan Spring area and includes an overlook and a tubing put-in dock. A tubing take-out dock is at the confluence of Pitt Spring run and Econfina Creek.

Safe Boat Passage – Econfina Creek is utilized by recreational boaters including both power boats and canoes/kayaks. Reduced water levels can increase the chances of damage to river substrates and damage to outboard motors from hard substrates such as the limestone outcroppings present along many parts of Econfina Creek. The intensive recreational boat use along portions Econfina Creek makes safe boat passage an important metric for the recreation WRV. Boat use along the Williford Spring run is not permitted. For minimum flow determination, two separate boat passage metrics were utilized to account for different uses along Econfina Creek.

Power Boats – Private power boat use along Econfina Creek below the SR 20 bridge is a popular recreational activity. A public boat ramp located at the CR 388 bridge crossing provides access to Econfina

Creek for power boats. The portion above SR 20 is typically not used for power boating as the Creek becomes narrow and shallow. For private recreational boat use along Econfina Creek below SR 20, a minimum water depth of 2.0 ft. across a continuous channel width of 30 ft. was used as the metric to evaluate safe boat passage. This metric has been used in previous MFL assessments and has been previously approved by scientific peer review (NFWFMD 2021, NFWFMD 2019, SRWMD 2016a). Although the portion of Econfina Creek above SR 20 is typically not used for power boating, a minimum water depth of 2.0 ft. across a continuous channel width of 15 ft. was used as the metric to allow passage for a single boat in this reach. This portion of Econfina Creek is considerably narrower and does not facilitate the passage of two power boats as is possible in the lower portions of the creek.

Canoe/Kayaks – Econfina Creek is commonly used for canoeing and kayaking. The DEP has identified Econfina Creek as a Florida Designated Paddling Trail from the Scott Rd. bridge to the CR 388 bridge. However, debris remaining from Hurricane Michael currently prevents kayaking above Williford Spring Group. A privately owned canoe/kayak rental business located along Econfina Creek near Williford Spring is a popular destination for recreational users. In addition, the Sylvan and Gainer Spring runs are popular kayaking destinations. Kayaking along the Williford Spring run is not permitted. The extensive use of Econfina Creek for canoeing/kayaking makes safe canoe and kayak passage an appropriate metric for this system.

A minimum thalweg depth of 1.5 ft. was used as the metric for safe canoe/kayak passage, similar to previous MFL evaluations (NFWFMD 2021, NFWFMD 2019, SRWMD 2013). This metric was assessed along Econfina Creek through study area from just above Williford Spring Group to Deer Point Lake.

4.2 Fish and Wildlife Habitat and the Passage of Fish

The abundant wildlife and extensive natural vegetation communities within Econfina Creek make Fish and Wildlife Habitat and the Passage of Fish a relevant WRV. Numerous metrics were considered for MFL evaluation as described below.

4.2.1 Fish Passage

Maintaining fish passage during low-flow conditions is important to allow fish physical access up and/or downstream a river to areas of deeper water to escape predation or to access food sources and/or spawning habitat. Econfina Creek provides habitat to numerous recreationally important fish species such as largemouth bass (Table 2-6). A screening of the fish species known to inhabit Econfina Creek (Table 2-6) revealed that largemouth bass are the native fish species capable of reaching the largest body depth. The largest bodied fish documented in Econfina Creek is grass carp, *Ctenopharyngodon Idella*. These are an exotic species (FWC 2021) and are listed as a conditional, non-native species by the State of Florida (chapter 68-5.004, Florida Administrative Code). The legal introduction of grass carp requires a permit from the FWC (Rule 68-5.005, Florida Administrative Code), however no permit exists for grass carp in Econfina Creek and it is assumed these individuals escaped from another location or were illegally introduced into the system. As a result, this species was not considered further for MFL evaluation.

Historically, larger-bodied native, anadromous/catadromous species such as Gulf Sturgeon and Striped Bass may have utilized Econfina Creek. These species require migrations between fresh and salt water to

complete their life cycle. In 1961, a water control structure was completed at the downstream end of Econfina Creek to create Deer Point Lake which serves as the primary source of potable water for Bay County. If these species had been present, this structure blocked the migration for anadromous/catadromous species preventing them from reaching their spawning grounds. Neither Gulf sturgeon nor striped bass have been documented in Econfina Creek before or since the construction of Deer Point Lake. As a result, these species were not considered further for MFL evaluation.

Little information is available concerning the requirements for fish passage for warm water species. Multiple MFL assessments have used a water depth of either 0.6 ft. or 0.8 ft. across as much as 25 percent of the river width as a fish passage criterion (SRWMD 2016a, SWFWMD 2017a). These depths were initially devised to protect anadromous fish (salmon and large trout) passage in the Pacific Northwest (Stalnaker and Arnette 1976) and represented the best available data at the time. In 2002, the SWFWMD determined that 0.6 ft. was most representative of the body depth of most individuals of the largest fish species known to inhabit the Peace River (largemouth bass, *Microptera salmoides*). Since largemouth bass are the deepest bodied, native fish species documented in Econfina Creek, a minimum fish passage depth of 0.6 ft. at the channel thalweg was utilized for the fish passage metric as has been used in previous MFL assessments (NFWFMD 2019, NFWFMD 2021). Largemouth bass are not known to gather in larger aggregations for long spawning runs similar to the anadromous species the metrics were initially designed for. As a result, a minimum channel width was not utilized in combination with the required depth. This metric was assessed through the Econfina Creek study area from just above Williford Spring to Deer Point Lake.

4.2.2 Instream Woody Habitat Inundation

Submerged woody habitat has been identified as being important as habitat and food for invertebrate species in streams of the southeastern United States (Benke et al. 1984, Benke et al. 1985). These macroinvertebrates then provide food for larger fauna including the recreationally important sunfishes and largemouth bass. In addition, woody habitat alters streamflow characteristics and helps create multiple habitat types including pools and bars habitat (Abbe and Montgomery 1996).

Two types of instream woody habitat were observed along Econfina Creek. Dead woody debris consists of tree stumps and fallen logs/branches present and inundated along the edge of the river channel. Live roots include tree roots, cypress knees, etc. found along the river edge that are routinely inundated by river flow or have become exposed due to erosion from water flow. Dead woody debris tends to be found deeper in the river channel and at a lower elevation than live roots. Due to the abundance of shoreline woody habitats and their importance to aquatic species, the length of time that woody habitats are inundated and accessible to aquatic species was considered an appropriate metric.

Woody debris habitats can be considered transient. Dead woody debris can be deposited as a result of tree/limb fall during storm events, following erosion, etc. These habitats degrade/decompose through time or get transported downstream and into the floodplain following high flow events. These debris are replaced by new debris creating a turnover of new and old debris. Live roots are created as sediments are eroded from around the roots of established trees and new trees and their associated structures such as cypress knees recruit near the channel. As described previously in Section 2.8, extensive debris cleanup

was conducted along Econfina Creek, removing the majority of woody debris within Econfina Creek including submerged trees which were present historically. As a result, much of Econfina Creek currently has little woody debris present, which is likely not representative of historical conditions.

As previously discussed, spring flows are relatively stable and represent only a portion of the Econfina Creek flows in the study area (Section 3.3). It is unknown whether water velocities associated with flows arising from Gainer, Williford, and Sylvan spring groups are sufficient to result in the erosion needed to help create live root habitat. During periods of reduced water levels, wetland trees can recruit near the stream channel and create new live root habitat when water levels return. Dead woody debris is routinely created and deposited in the creek and may have little to do with spring flows.

Due to the transient nature of instream woody habitat and impact from Hurricane Michael and debris cleanup efforts, woody debris was determined to not be appropriate for this MFL evaluation at this time and was not considered further.

4.2.3 Floodplain Vegetation Inundation

Following Hurricane Michael large portions of the Econfina Creek floodplain habitat were severely damaged, as described previously in Section 2.8. As a result, floodplain communities currently present may not be representative of what they were historically. The floodplain communities are likely to undergo rapid succession into a more stable community during the next decade and may exhibit changes in community structure compared to the early successional floodplain communities currently present. In addition, the high concentration of dead and leaning trees in the floodplain presents numerous safety concerns and precluded floodplain sampling. As a result, the sampling of trees in the floodplain was not conducted.

Although floodplain vegetation inundation was not directly evaluated, this indicator was addressed by considering the frequency of out-of-bank flows as a function of streamflow along Econfina Creek. Maintaining out-of-bank flows along Econfina Creek is expected to provide protection to riparian and wetland systems allowing for protection of this indicator and was considered in establishing MFLs for the middle Econfina Creek including Gainer, Williford, and Sylvan spring groups. Detailed methodologies for assessing out-of-bank flows are presented in Section 6.2.

4.2.4 In Stream Habitat of Aquatic Species

Since Econfina Creek provides habitat for numerous aquatic species, metrics pertaining to instream habitat of aquatic species are relevant for this MFL evaluation. Habitat suitability is defined based on relationships among depth, substrate, and stream velocity at specific transect locations. Through a series of subroutine programs in the System for Environmental Flow Analysis (SEFA) software, a prediction of the amount of available habitat (Area Weighted Suitability (AWS)) for target organism(s) over a range of stream flow conditions is created. The effects of flow reduction scenarios on AWS can be evaluated to quantify in-stream habitat metrics. Details regarding SEFA model development are presented in Section 5.2.

4.3 Estuarine Resources

Estuarine conditions are not present within the study area. Therefore, this WRV was not considered further for metric development and MFL evaluation.

4.4 Transfer of Detrital Material

Detrital material is comprised of dead organic material (largely vegetation) in the process of decomposition. Plant detritus comprises a large portion of the food base in aquatic and wetland ecosystems. Little quantifiable data is available regarding the transport of detrital material in Econfina Creek or its relationship to flow characteristics. In addition, spring water is typically very low in detritus. As a result, this WRV was unable to be associated with a directly quantifiable metric.

Although transfer of detrital material was not directly evaluated, this WRV was addressed by considering the frequency of out-of-bank flows as a function of streamflow along Econfina Creek. Maintaining out-of-bank flows along Econfina Creek is expected to provide protection to riparian and wetland systems allowing for protection of this WRV and was considered in establishing MFLs for Gainer, Williford, and Sylvan Spring Groups. Detailed methodologies for assessing out-of-bank flows are presented in Section 6.2.

4.5 Maintenance of Freshwater Storage and Supply

Maintaining long-term freshwater storage for non-consumptive uses and environmental resources is the prime objective for establishing a MFL flow regime. Freshwater storage and supply for the natural system is addressed as part of the overall minimum flow regime, which protects water availability for multiple WRVs.

Although maintenance of freshwater storage and supply was not directly evaluated, this WRV was addressed by considering the frequency of out-of-bank flows as a function of streamflow along Econfina Creek. Maintaining out-of-bank flows along Econfina Creek is expected to sustain riverine fluvial dynamics, and therefore freshwater storage and supply, allowing for protection of this WRV and was considered in establishing MFLs for Gainer, Williford, and Sylvan Spring Groups. Detailed methodologies for assessing out-of-bank flows are presented in Section 6.2.

4.6 Aesthetic and Scenic Attributes

Aesthetic and scenic attributes refer to passive uses of the river such as nature viewing, hiking, and photography. These uses are one of the main reasons for the popularity of Econfina Creek for recreational uses. Active recreational uses are described in Section 2.9. The vegetation (instream and riparian) and wildlife are addressed under WRV2 Fish and Wildlife Habitats and the Passage of Fish. Therefore, protection of this WRV is incorporated in metrics pertaining to Recreation and Fish and Wildlife Habitats.

Previous MFL assessments have described an increase in filamentous algal cover on submerged aquatic vegetation in rivers as a decrease in the aesthetics of a system (SRWMD 2013). The relationship between algal cover and water velocity has been described as a subsidy-stress relationship where changes in water velocity can promote algal growth through increased nutrient uptake but also impede algal growth through shearing (Horner and Welch 1981, Stevenson 1996, Biggs et al. 1998, King 2012). A minimum

average channel velocity of 0.8 ft/s in locations with surveyed submerged aquatic vegetation (SAV) was utilized as the metric for impediment of algal growth on SAV for the Lower Sante Fe and Ichetucknee River MFL and Silver River MFL (SRWMD 2021, SJRWMD 2017). However, little SAV is present along the Econfina Creek study area (Section 2.9.1) and instream woody habitat has been severely reduced through clearing leaving little areas for filamentous algae to attach and grow. As a result, this metric was not considered further for this MFL evaluation. Similar to excessive algal cover, nuisance and exotic vegetation can decrease the aesthetics of an aquatic system. Currently, little nuisance and exotic vegetation exists along Econfina Creek.

As a result of the lack of SAV, instream woody habitat, and nuisance/exotic vegetation, this water resource value was not considered further for MFL analysis.

4.7 Filtration and Absorption of Nutrients and Other Pollutants

Nutrients are taken up by aquatic plants where they are stored, and in some cases transported out of the aquatic system. Floodplains and wetland soils also provide areas for nitrogen mineralization and denitrification. Information concerning the filtration and absorption of nutrients and other pollutants is currently unavailable for Econfina Creek. As a result, this WRV was unable to be associated with a directly quantifiable metric.

Although filtration and absorption of nutrients and other pollutants was not directly evaluated, this WRV was addressed by considering the frequency of out-of-bank flows as a function of streamflow along Econfina Creek. Maintaining out-of-bank flows along Econfina Creek is expected to provide protection to riparian and wetland systems allowing for protection of this WRV and was considered in establishing MFLs for Gainer, Williford, and Sylvan spring groups. Detailed methodologies for assessing out-of-bank flows are presented in Section 6.2.

4.8 Sediment Loads

The importance of sediment transport in the maintenance of Econfina Creek geomorphology and its associated ecological communities was considered as a WRV for this MFL evaluation. Information concerning sediment size and transport downstream is currently unavailable for Econfina Creek. As a result, this WRV was unable to be quantified. Given the karst nature of Econfina Creek and the associated limestone outcroppings and mix of coarse sand, shell, and gravel substrate that are present along the middle portion of the creek, it is probable most of the creek's sediment load is carried at higher flows.

Although sediment transport was not directly evaluated, this WRV was addressed by considering the frequency of out-of-bank flows as a function of streamflow along Econfina Creek. Maintaining out-of-bank flows along Econfina Creek is expected to provide protection to sediment transport processes which are more likely to occur at higher flows allowing for protection of this WRV and was considered in establishing MFLs for Gainer, Williford, and Sylvan spring groups. Detailed methodologies for assessing out-of-bank flows are presented in Section 6.2.

4.9 Water Quality

Based on the water quality data analyses presented in Section 2.7, metrics pertaining to water quality were not utilized in the MFL determination for the Gainer Spring Group, Williford Spring Group, or Sylvan Spring Group. As indicated previously, levels of nitrate at Gainer Spring Group are relatively low, with an average concentration of 0.20 mg/L. Average specific conductance at Gainer Spring was 136 uS/cm indicating minimal salinity impacts. Neither parameter has a statistically significant relationship with spring flow or stream flow. Additionally, due to the extensive efforts by the District to protect Econfina Creek watershed through land acquisition coupled with minimal projected growth in the area, water quality is not anticipated to be of concern for this system.

4.10 Navigation

The District has defined this WRV as the navigation of commercial vessels within the study area. Econfina Creek is not used for commercial navigation making the Navigation WRV inappropriate for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group minimum flows determination.

4.11 Selection of Water Resource Values and Associated Metrics

After carefully considering all 10 WRVs, the WRVs evaluated explicitly for the determination of minimum Econfina Creek spring flows are:

- Recreation In and On the Water
- Fish and Wildlife Habitat and the Passage of Fish

An assessment of out-of-bank flows was also considered providing protection for several WRVs including:

- Transfer of Detrital Material
- Maintenance of Freshwater Storage and Supply
- Filtration and Absorption of Nutrients and Other Pollutants
- Sediment Loads
- Aesthetic and Scenic Attributes

Two WRVs were considered not relevant for the establishment of MFLs for Econfina Creek springs including:

- Estuarine Resources
- Navigation

A summary of WRVs, indicators, and associated metrics utilized to determine minimum flows for middle Econfina Creek and associated spring groups is shown in Table 4-1.

Table 4-1. Selected Water Resource Values, Indicators, and Metrics Utilized to Determine Minimum Flows for Middle Econfina Creek and Associated Spring Groups

Water Resource Value	Indicator	Metric(s)
Recreation in and on the water	Canoe/kayak passage	Percent of time flows maintaining a minimum thalweg depth of 1.5 ft. at all transects in the study area is achieved.
Recreation in and on the water	Power boat passage	Percent of time flows maintaining a 2 ft. depth across a 30 ft. width at all transects below SR 20 is achieved (2 boats side by side). Percent of time flows maintaining a 2 ft. depth across a 15 ft. width at all transects in the study area above SR 20 is achieved.
Fish and Wildlife Habitat and the Passage of Fish	Fish passage	Percent of time flows maintaining a minimum thalweg depth of 0.6 ft. at all transects in the study area is achieved.
Fish and Wildlife Habitat and the Passage of Fish	Floodplain vegetation inundation	Relative weighted wetted perimeter associated with inflection point(s) of streamflow versus weighted wetted perimeter within the study area.
Fish and Wildlife Habitat and the Passage of Fish	Instream habitat of aquatic species	Area weighted suitability (AWS) versus streamflow for select aquatic species using SEFA.
Transfer of Detrital Material	Riparian habitat and floodplain inundation	Relative weighted wetted perimeter associated with inflection point(s) of streamflow versus weighted wetted perimeter within the study area.
Maintenance of Freshwater Storage and Supply	Riverine fluvial dynamics	Relative weighted wetted perimeter associated with inflection point(s) of streamflow versus weighted wetted perimeter within the study area.
Filtration and Absorption of Nutrients and Other Pollutants	Riparian habitat and floodplain inundation	Relative weighted wetted perimeter associated with inflection point(s) of streamflow versus weighted wetted perimeter within the study area.
Sediment Loads	Riparian habitat and floodplain inundation	Relative weighted wetted perimeter associated with inflection point(s) of streamflow versus weighted wetted perimeter within the study area.

5 Models Used in Minimum Flow Determination

In order to assess the effect of changes in spring flow from Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group on WRV indicators and associated metrics, extensive data collection and modeling efforts were performed. Two models were developed for MFL assessment including a Hydraulic Engineering Centers River Analysis System (HEC-RAS) model for assessing low flow (passage) metrics as well as bankfull/out-of-bank flow metrics, and a System for Environmental Flow Analysis (SEFA) model for evaluating instream habitat metrics. Model development and associated data collection for both the HEC-RAS and SEFA models utilized in this MFL assessment are described below.

5.1 HEC-RAS Model Development and Calibration

The Hydrologic Engineering Centers River Analysis System (HEC-RAS) model is a widely used one-dimensional model for hydraulic analysis of river channels and associated floodplains. The stream channel geometry and properties are represented by a series of attributed cross-sections (XS). The HEC-RAS model enables the calculation of water surface profiles for steady and unsteady (transient) flow profiles. Calculations are based on computed energy losses between adjacent cross-sections.

A HEC-RAS model of the Econfina Creek MFL study area was developed for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group MFL evaluation, using HEC-RAS version 6.3.1. A summary of the development and calibration of the HEC-RAS model used for this evaluation is presented below. Further details are provided in Appendix A of this report.

A steady-state HEC-RAS (HEC-RAS Version 6.3.1) model of the middle (between Williford Spring Group and CR 388 bridge) and lower (Below CR 388 bridge) portions of Econfina Creek was developed by District staff with support from ATM, a Geosyntec Company (ATM) in support of MFL development for Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. The model was constructed with the best available data, including high resolution Digital Elevation Model (DEM), recent cross-sectional survey data throughout the model domain, and hydrologic data from all available stations along Econfina Creek. Although a HEC-RAS model had previously been developed in 2006 for the middle and lower portions of Econfina Creek for performing Federal Emergency Management Agency (FEMA) flood evaluations, a new model was constructed for purposes of MFL evaluation due to the required model resolution at low flows as well as newly available DEM, survey, and hydrologic data along with significant changes to the system resulting from Hurricane Michael impacts. Surveyed bridge dimensions for the SR 20 and CR 388 Econfina Creek bridge crossings obtained from Florida Department of Transportation, as well as dimensions contained in the existing FEMA model, were utilized for the updated MFL HEC-RAS model.

The model domain extends from immediately north of Williford Spring to the northern portion of Deer Point Lake at the confluence of Econfina Creek and Bear Creek, encompassing all spring group flow contributions considered for MFL evaluation. The model was extended just above Williford Spring to allow for Williford springflow to be included as an independent flow input from upstream flows. The model was extended to Deer Point Lake to allow for adequate representation of a downstream model boundary condition (Figure 5-1).

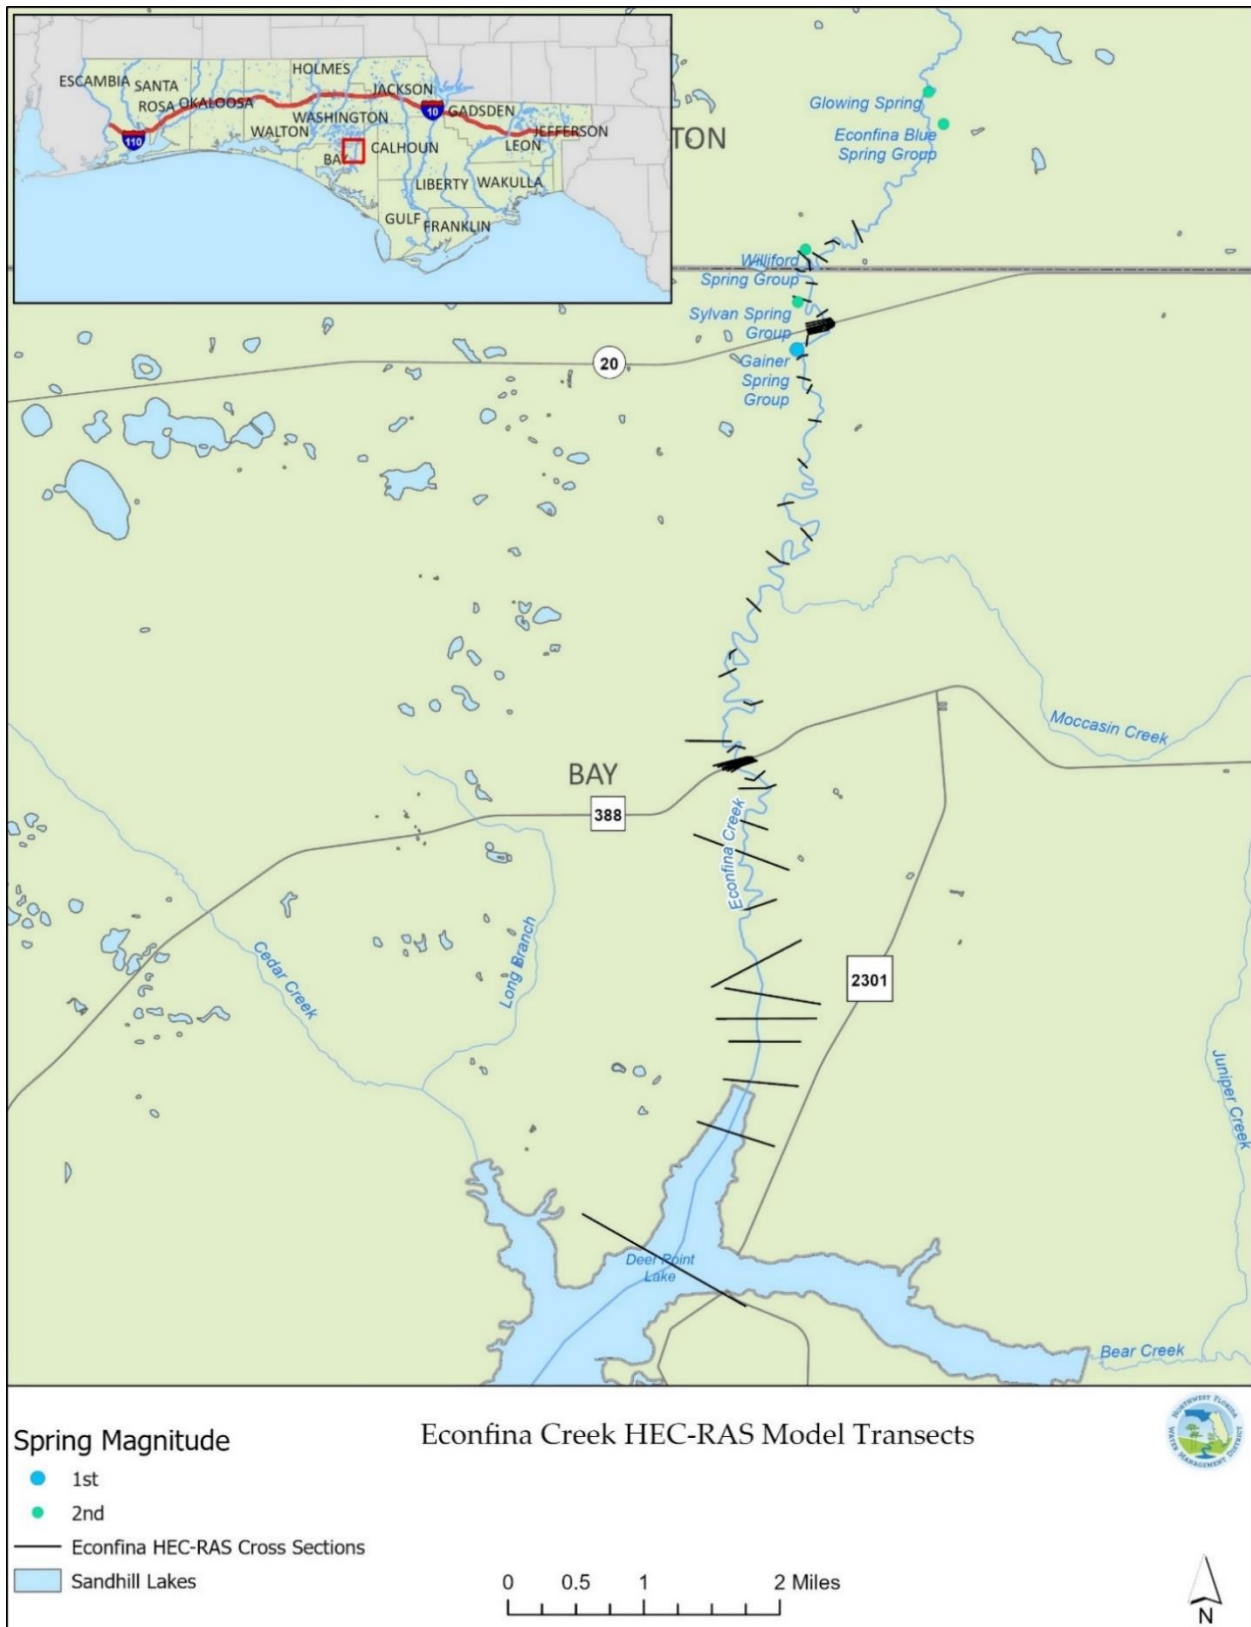


Figure 5-1. Econfina Creek and Springs MFL HEC-RAS Model Extent

Based on an initial review of the previous Econfinia Creek FEMA model, District staff in conjunction with ATM determined that all existing transect locations would need to be resurveyed to ensure the channel was represented with appropriate precision to accurately represent low flow conditions. Additionally, Econfinia Creek had undergone extensive scouring and deposition as a result of Hurricane Michael, which needed to be reflected by more recent channel bathymetry. Additional survey transect locations were also needed to better represent Econfinia Creek in the vicinity of the springs and spring runs, extend the model domain north to Williford Spring and south to Deer Point Lake, capture river bathymetry in areas with sparse representation, and better represent bridge crossings within the model. District staff, along with ATM and Janicki Environmental, Inc. conducted a field reconnaissance on June 15, 2021, to identify potential additional survey transect locations (Figure 5-2). A total of 20 additional locations were identified between immediately above Williford Spring Group and the CR 388 bridge crossing based on the above criteria (ATM 2021).

In 2021, Southeastern Surveying and Mapping, Corporation (Southeastern) performed 37 cross-section elevation surveys between Williford Spring and CR 388 bridge (Southeastern 2021a, Southeastern 2021b). Each transect included the stream channel and extended five feet upland of the top of bank on either side of the channel. The work included some surveys along spring runs in case it became necessary to represent the spring runs within the model. Initially, model transects below CR 388 were taken from the existing FEMA model. After initial model testing had begun, it became apparent updated survey of these transects would significantly improve model accuracy in the lower reach of the model domain. In 2023, Southeastern was contracted to perform an additional 12 cross-section elevation surveys below CR 388 extending to the end of the model domain in Deer Point Lake (Southeastern 2023).

A total of 40 cross sections were digitized within RAS Mapper extending sufficiently into the floodplain to accommodate high flow scenarios. Elevation survey points were utilized to replace the terrain-derived elevations within the channel for all cross sections where survey was available.

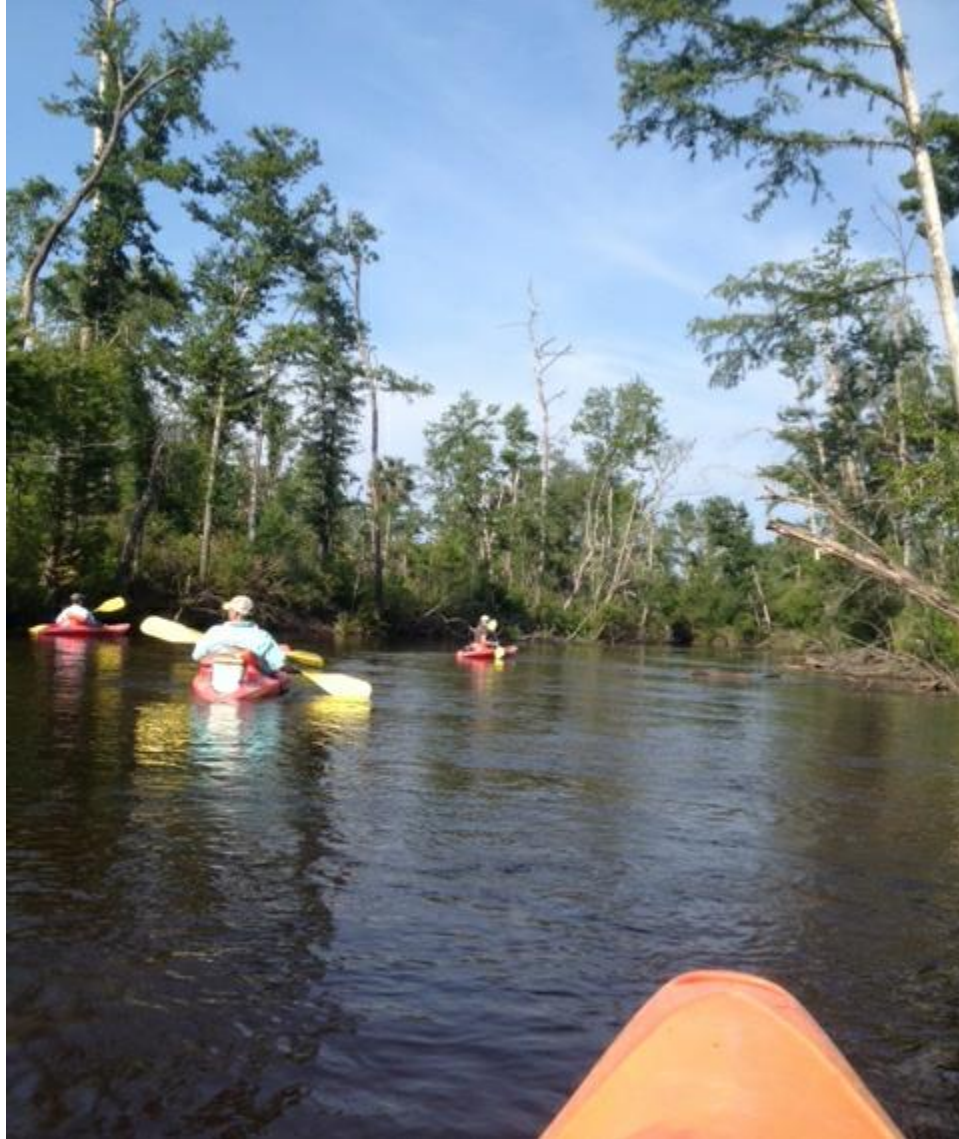


Figure 5-2. Econfina Creek Field Reconnaissance, June 2021

Flow inputs for the Econfina Creek HEC-RAS model consist of Econfina Creek flow immediately upstream of the confluence with the Williford Spring Group run, spring flow contributions from Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, and lateral inflow pickup between Gainer Spring Group and the CR 388 bridge (Figure 5-3). The Deer Point Lake water surface elevation was utilized as the downstream stage boundary condition. These inputs were derived based on surface water monitoring stations along Econfina Creek maintained by the District and USGS including:

- USGS 02359500 Econfina Creek Near Bennet, FL (Econfina Creek @ CR 388)
- NFWFMD 8548 Econfina Creek @ SR 20
- NFWFMD 8099 Econfina Creek Above Gainer Spring
- NFWFMD 8100 Econfina Creek Below Gainer Spring
- NFWFMD 8544 Deer Point Lake Near Dam



Figure 5-3. Econfina Creek Monitoring Stations Utilized to Develop Model Boundary Conditions

The steady state HEC-RAS model was calibrated by adjusting model parameters to observed stages and flows at three locations with sufficient data along Econfina Creek. The primary model parameters adjusted were channel and floodplain roughness coefficients (Manning’s n). Other adjustments included addition of interpolated cross sections to improve model stability near bridge crossings, adjustments to ineffective flow areas, and modifications to channel cross-section geometry.

Based on the evaluation of stage-discharge relationships for Econfina Creek presented in Section 3.4 and 3.5, a calibration period of April 1, 2019, to September 18, 2023, was selected as the period of best available data record at the time of model calibration which represents the current stage-discharge relationship for Econfina Creek. This period is reflective of debris removal completion and recovery of the system to a stable rating from the impact of Hurricane Michael. Fluctuations in stage-discharge relationships will continue to be monitored for this system as it continues to recover from Hurricane Michael impacts and floodplain and instream communities continue to recuperate.

The performance of Econfina Creek MFLs HEC-RAS model was evaluated by comparing the model predicted stage-discharge rating to the observed stage-discharge rating for all available data from April 1, 2019 through September 18, 2023, for all three stations listed in Table 5-1. The Gainer Spring Group composite station had a data gap during the calibration period from September 10, 2020 through June 9, 2021. Suitable data was available at all three locations to allow for comparison of ratings across a wide range of flow conditions, allowing for suitable calibration target datasets.

Table 5-1. Surface Water Stations and Available Period of Record for Calibration of the Econfina Creek MFLs HEC-RAS Model

Station Number	Site Name	Period of Record Available for Stage-Discharge Rating Calibration
USGS 02359500	Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388)	April 1, 2019 – September 18, 2023
NFWMD 8548	Econfina Creek @ SR 20	April 1, 2019 – September 18, 2023
NFWMD 8100	Econfina Creek Below Gainer Spring	October 28, 2019 - September 9, 2020; June 10, 2021- September 18, 2023

Goodness of fit was determined by graphical comparison of simulated to measured rating curves (Figures 5-4, 5-5, and 5-6). Graphical comparisons indicate the simulated rating curves replicate measured rating curves sufficiently at all three calibration locations. The simulated ratings are contained within the range of the measured ratings for all simulated percentile flows that could be compared. As described previously, the flow regime during the calibration period (April 1, 2019 through September 18, 2023) was higher than historical conditions due to increased precipitation and groundwater levels. Therefore, simulated historical conditions could not be compared under low flow conditions to measured data during the calibration period, although the majority of the flow regime coincides.

Computation of statistical model performance metrics including: mean squared error (MSE), correlation coefficient, R-squared, and Nash-Sutcliffe efficiency was determined for the Econfina Creek @ SR 20 and

Econfina Creek below Gainer stations by defining a base rating curve for each station, defined to be the current rating curve associated with normal hydrologic conditions for a riverine system (Table 5-2). Details regarding rating curve development and derivation of base rating curves is presented in Appendix A.

For Econfina Creek @ CR 388, only the current rating curve is available from the USGS. Therefore, a base rating curve could not be determined and performance metrics were not computed for the model fit to this station.

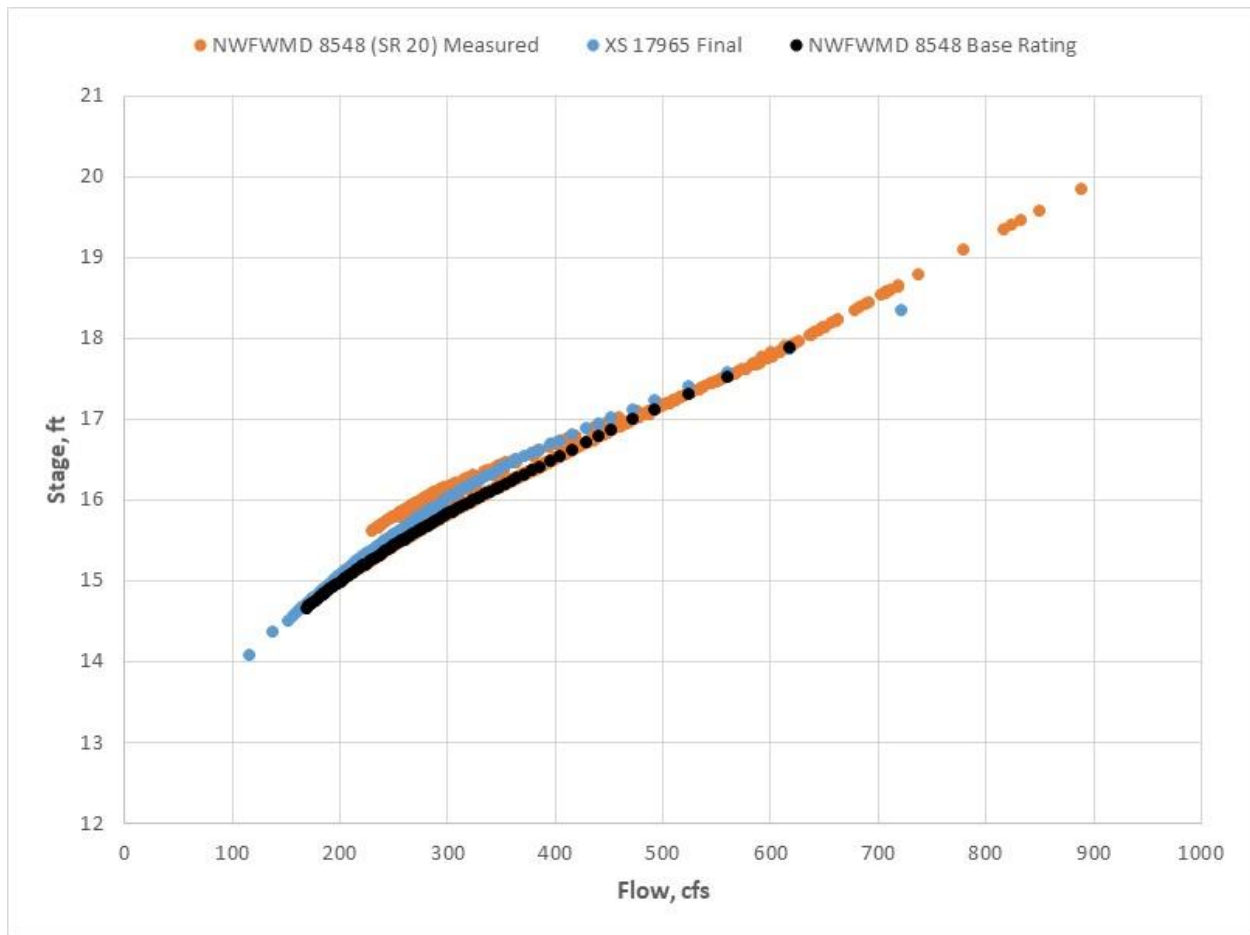


Figure 5-4. Comparison of Measured Stage-Discharge Rating at NFWWMD 8548 (Econfina Creek @ SR 20) With Final Simulated Stage-Discharge Rating at XS 17965 (Nearest XS to Econfina Creek @ SR 20 Station) for Calibration Period from 4/1/2019 through 9/18/2023

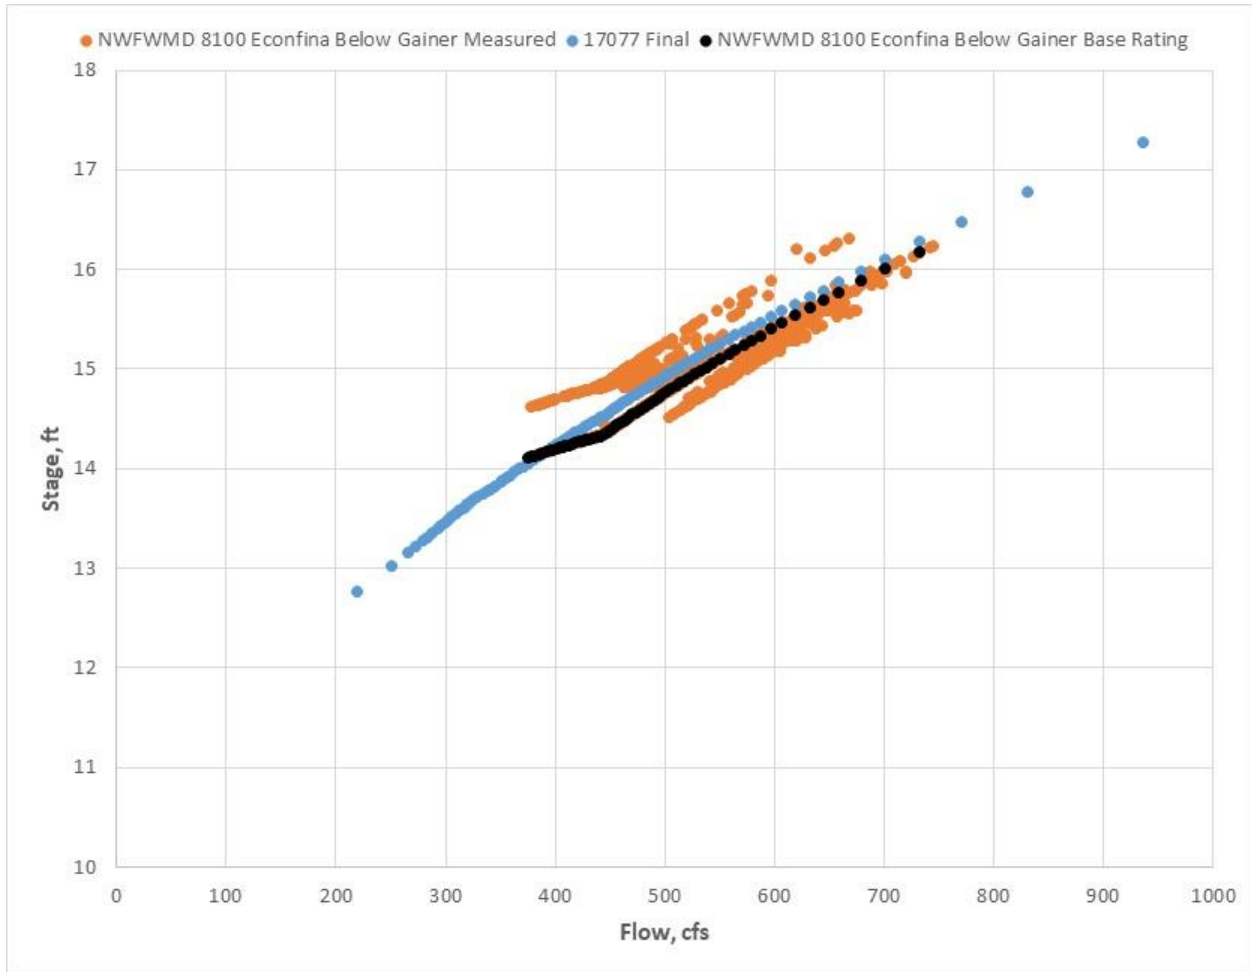


Figure 5-5. Comparison of Measured Stage-Discharge Rating at NFWWMD 8100 (Econfina Creek Below Gainer Spring Group) With Final Simulated Stage-Discharge Rating at XS 17077 (Nearest XS to Econfina Creek Below Gainer Spring Group) for Calibration Period from 4/1/2019 through 9/18/2023

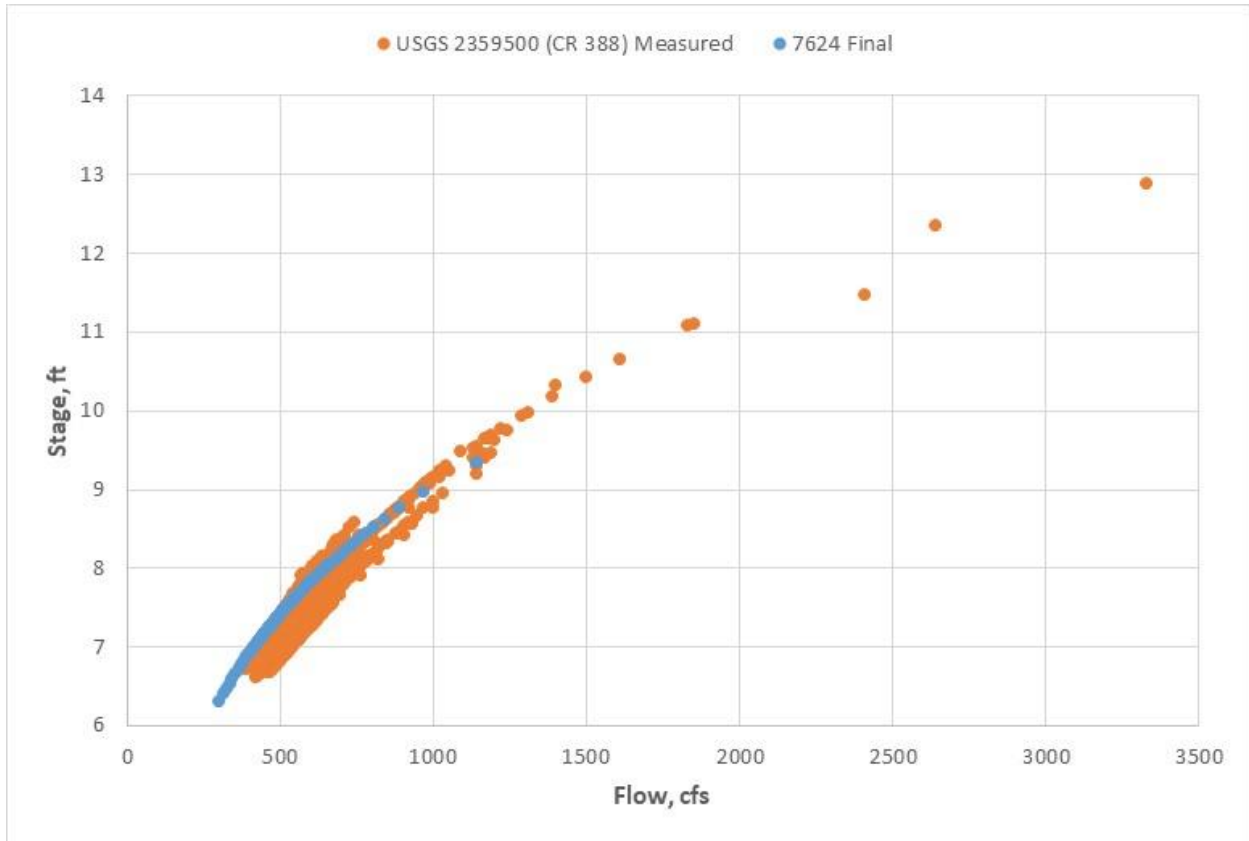


Figure 5-6. Comparison of Measured Stage-Discharge Rating at USGS 2359500 (Econfina Creek @ CR 388) With Final Simulated Stage-Discharge Rating at XS 7624 (Nearest XS to Econfina Creek @ CR 388 Station) for Calibration Period from 4/1/2019 through 9/18/2023

Table 5-2. Model Calibration Performance Metrics

Model Performance Metric	NWFID 8548 (Econfina Creek @ SR 20)	NWFID 8100 (Econfina Creek Below Gainer Spring Group)
MSE (ft ²)	0.0239	0.0195
Correlation Coefficient	0.9974	0.9932
R-squared	0.9947	0.9863
Nash- Sutcliffe	0.9474	0.9301

5.2 SEFA Model

SEFA (System for Environmental Flow Analysis) (Aquatic Habitat Analysts, Inc. 2012) is a Windows-based program that was developed as a tool for use in studies that utilize the Instream Flow Incremental Methodology (IFIM). The Instream Flow Incremental Methodology is a framework developed by the U.S. Fish and Wildlife Services in the 1970s for determining the relationship between stream flows and fish habitat. SEFA is current software that implements the IFIM framework. SEFA utilizes hydraulic models coupled with habitat suitability relationships for specific classes of species to determine relationships between streamflow and available habitat. Habitat suitability is defined based on relationships among

depth, substrate, and stream velocity at specific transect locations. Through a series of subroutine programs in SEFA, a prediction of the suitability index of available habitat (Area Weighted Suitability (AWS) for target organism(s) over a range of streamflow conditions is created.

The SEFA methodology has been applied to support the development of environmental flow regimes as required by Florida's MFL statutes. Specifically, SEFA has been applied to support MFL development for lotic ecosystems (i.e., rivers and creeks) by four of the Florida water management districts – Southwest, St. Johns River, Suwannee River, and more recently Northwest. Examples of waterbodies for which SEFA was utilized to support MFL development include the Lower Sante Fe and Ichetucknee Rivers and the Little Manatee River (SRWMD 2021, SWFWMD 2023).

The SEFA model uses the HEC-RAS (Hydrologic Engineering Center River Analysis System) model output to calculate AWS, a suitability index that reflects habitat quality and quantity. The AWS can be modeled for an individual cross section, or in aggregate for any number of cross sections or the entirety of the model domain. The SEFA model can utilize HEC-RAS cross-sectional estimates of both the area of inundated channel at a particular HEC-RAS cross section as well as velocities at specific channel locations across the main channel to derive an aggregate AWS value for a given flow that describes the relative suitability throughout the model domain. The SEFA model can be run to compute aggregate AWS for each flow in a streamflow time series. The model output is a curve relating flow to AWS, with each value of flow having a single corresponding aggregate AWS value for the model domain. Therefore, a series of flow values can be converted into a series of AWS values for each taxon/life history stage or habitat guild that comprise a given habitat suitability group. Alternative scenarios, for example time series of flows under baseline (unimpacted) conditions, can be compared to flow-reduction scenarios to determine change in AWS associated with decreases in flows (Herrick, 2021).

The District contracted with Geosyntec Consultants, Inc., d/b/a Applied Technology and Management, Inc. (ATM) to develop a System for Environmental Flow Analysis (SEFA) model for the Econfinia Creek system. Environmental Science Associates (ESA), a subcontractor, worked with ATM to satisfy the objectives of this project. The goal of this task was to examine the extent to which reductions in streamflow affect the habitat availability, as indicated by AWS, for relevant species within the Econfinia Creek Spring Group MFLs study area.

Habitat suitability curves (HSCs) represent the functional relationship between the physical habitat variables such as depth and velocity and the response of the selected guild/species/life stage. The HSC index values vary between 0 (least suitable) and 1 (most suitable) and provide a probability measure on how suitable a habitat is for a target species. Table 2-6 presents the fish species documented to occur in Econfinia Creek. Habitat suitability curves were identified by cross-referencing the species in Table 2-6 from a series of existing curves found in either the Gore library or Nagid Library. The Gore Library includes curves used in the Little Manatee River and Wekiva River MFL evaluations (SWFWMD 2023, SJRWMD 2024). The Nagid library includes curves found in the Florida Handbook of Habitat Suitability Indices (Nagid 2022a, Nagid 2022b). Based upon the relevant fish species identified in Table 5-3 and the availability of corresponding HSCs, HSCs for nine fish species were incorporated into the SEFA modeling. If both curve sources were available, preference was given to the Nagid curves as the Nagid curves were recently

developed for use and accuracy in Florida and were based upon Florida specific best available information. For many species, multiple HSCs were available for a given species reflective of habitat preferences of different life stages. When available, curves for all life stages were utilized. In addition, four HSCs were used for different general habitat guilds. Additional information on life stage and habitat guild HSCs is found in section 6.3. Appendix B presents the specific habitat suitability curves used in this effort.

Table 5-3. Fish Species Documented in Econfina Creek for Which Habitat Suitability Curves are Available

Econfina Taxa		Gore Curves	Nagid Curves
<i>Aphredoderus sayanus</i>	Pirate perch		X
<i>Ictalurus punctatus</i>	Channel catfish	X	
<i>Lepomis auratus</i>	Redbreast sunfish	X	X
<i>Lepomis macrochirus</i>	Bluegill	X	X
<i>Lepomis punctatus</i>	Spotted sunfish	X	X
<i>Micropterus salmoides floridanus</i>	Largemouth bass	X	X
<i>Minytrema melanops</i>	Spotted sucker		X
<i>Notropis harperi</i>	Redeye chub		
<i>Noturus leptacanthus</i>	Speckled madtom		X
<i>Habitat Guild – Deep Fast</i>		X	
<i>Habitat Guild – Deep Slow</i>		X	
<i>Habitat Guild – Shallow Fast</i>		X	
<i>Habitat Guild – Shallow Slow</i>		X	

In addition to the habitat suitability curves, the SEFA application requires riverine hydraulic information to simulate water depths and velocities as a function of streamflow. The calibrated steady state HEC-RAS model described in Section 5.1 was utilized to derive cross-sectional estimates of both the area of inundated channel as well as velocities at specific channel locations across the main channel. Modeling scenarios for purposes of this evaluation consisted of one model scenario for each flow percentile, based on period of record flows for all model inputs. Therefore, a total of 99 steady state model scenarios were run (P1 - P99). This allows for determination of precise relationships between flow and AWS.

The period of record flow (10/1/1935 through 10/13/2023) for the Econfina Creek @ CR 388 station (USGS 02359500) was selected as the reference time series to assess instream habitat metrics due to its long-term period of record. As described in Section 3.7, an adjustment of +1.78 cfs (representative of total 2020 groundwater withdrawals within the Econfina GWCA) was added to each average daily flow for all dates of the reference time series as a conservative estimate of baseline streamflows (flows unimpacted by groundwater withdrawals).

In order to perform scenarios reflective of baseline conditions accounting for groundwater withdrawal impacts, 1.78 cfs was added to all reference flows previously utilized for model development and calibration at all flow input locations in the model. The baseline flow scenarios were executed in the previously developed HEC-RAS model and the resultant water surface profiles and velocity distributions from all model transects in the model domain were utilized within the SEFA model. The SEFA model simulations were run based on output from each baseline model scenario from the HEC-RAS model,

resulting in estimated aggregate AWS for each fish species or guild as a function of flow for the baseline time series.

Appendix B presents the SEFA results for the baseline flow scenarios simulated. The mean, median, and maximum AWS and associated Econfinia Creek flow at the CR 388 gauge are presented. Application of these results for the instream habitat WRV assessment is described in Section 6.3.

6 Evaluation of Water Resource Values and Results

This section describes the evaluation of water resource value metrics presented in Section 4 and the resulting allowable flow reductions.

6.1 Passage (Low Flow) Metrics Evaluation

6.1.1 Methodology

The calibrated steady state HEC-RAS model described in Section 5 was utilized to evaluate effects of spring flow reductions for passage (low flow) metrics including canoe/kayak passage, power boat passage, and fish passage within the Econfina MFL study area. Modeling scenarios for purposes of WRV metric analysis consisted of one model scenario for each flow percentile, based on period of record flows for all model inputs. Therefore, a total of 99 steady state model scenarios were run (P1 - P99). This allows for determination of precise critical flow percentiles associated with a given WRV metric.

The period of record flow (10/1/1935 through 10/13/2023) for the Econfina Creek @ CR 388 station (USGS 02359500) was selected as the reference time series to assess WRV metrics due to its long-term period of record. As described in Section 3.7, an adjustment of +1.78 cfs (representative of total 2020 groundwater withdrawals within the Econfina GWCA) was added to all dates of the reference time series as a conservative estimate of baseline flows (flows unimpacted by groundwater withdrawals). This adjusted baseline timeseries was utilized to assess exceedance frequencies associated with critical flows for each WRV metric for conditions unimpacted by groundwater withdrawals.

In order to perform scenarios reflective of baseline conditions accounting for groundwater withdrawal impacts, 1.78 cfs was added to all reference flow percentiles previously utilized for model development and calibration at all flow input locations in the model. The resultant water surface profile from these model scenarios reflects baseline conditions in absence of groundwater withdrawal impacts, and was utilized for determination of critical flow percentiles associated with critical depths for each water resource value metric.

The methodology and results for each WRV metric are described below. The methodology used to determine allowable streamflow reduction associated with a 15-percent reduction in the frequency of occurrence for each WRV metric is described below. A 15-percent reduction in the percent of time in a WRV metric has been observed has been implemented as the protection standard for numerous MFL assessments throughout Florida and is also used in this assessment.

Minimum Flow Determination Methodology

1. Perform steady state model scenarios utilizing adjusted flow inputs, adding 1.78 cfs to all reference flow percentiles previously utilized for model development and calibration at all flow input locations
2. Determine critical elevation (e.g., river stage associated with sufficient depth) for the metric at each HEC-RAS transect.

3. Using the HEC-RAS model output (water surface elevation, streamflow, and flow percentile), determine the critical flow percentile for each model transect as the minimum flow which results in a water surface elevation exceeding the critical elevation.
4. Using the flow percentile from step 3, determine the critical flow at USGS 02359500 Econfina Creek @CR 388 for each transect.
5. Determine the number of days in the period of record the critical flow at USGS 02359500 Econfina Creek @CR 388 was achieved based on the flow percentile.
6. Reduce the number of days the critical flow was achieved by 15 percent.
7. Determine the flow percentile associated with the reduced number of days and determine the associated flow based on the baseline timeseries for USGS 02359500 Econfina Creek @CR 388.
8. Calculate the allowable reduction in streamflow (cfs) associated with the reduced frequency of occurrence by subtracting the flow determined in step 7 from that in step 4.
9. Determine the allowable percent streamflow reduction using the result from step 8.

6.1.2 Safe Boat Passage

As described in Section 4, safe boat passage was determined to be a relevant indicator for WRV 1- Recreation In and On The Water. Specific metrics were defined for safe canoeing/kayaking and safe power boating.

Safe canoeing/kayaking - A minimum thalweg depth of 1.5 ft. was used as the metric for safe canoe/kayak passage. The critical elevation (NAVD 88) for the safe passage of canoe/kayak vessels was determined by adding 1.5 ft. to the thalweg elevation (minimum elevation in a channel) for each transect (Figure 6-1 and Table 6-1). This metric was assessed for all transects in the study area utilizing the methodology described above in section 6.1.1.

Based on this methodology, safe canoe and kayak passage was possible at all river transects evaluated in the study area under all flow scenarios (Figure 6-1 and Table 6-1). Even under the lowest flow scenario, modeled water depth was above critical depth at the most restrictive transect (18040). Under the lowest flow scenario at the most restrictive transect, water levels were simulated to be 0.95 ft. above critical depth. Since flows limiting non-motorized boat passage were not observed during the baseline time period, this metric was not considered further for MFL determination.

Safe Power Boating - For recreational boat use along Econfina Creek above SR 20, a minimum water depth of 2.0 ft. across a continuous channel width of 15 ft. was used as the metric to evaluate safe boat passage to allow passage for a single boat in this reach. For model transects below SR 20 within the study area, the critical elevation was determined by adding a water depth of 2.0 ft. to the minimum channel elevation with a continuous 30 ft. width across the channel as has been done in multiple other MFL assessments throughout the state (Figure 6-2 and Table 6-2). This metric was assessed for all transects in the study area utilizing the methodology described above in section 6.1.1.

Based on this methodology, for all but three transects assessed, safe power boat passage was possible under all flow scenarios, including all transects below Gainer Spring Group (Figure 6-2 and Table 6-2). The remaining three transects had a critical flow at either the 2nd (P2) or 3rd (P3) flow percentile (98th or 97th

percent exceedance), indicating the safe power boat passage metric was not achieved under very low flow conditions under baseline conditions. Therefore, the most limiting flow at the Econfina Creek @ CR 388 station is 328 cfs, associated with the P3 flow scenario, to achieve safe power boat passage at the most restrictive transect (19710). For a 15% reduction in number of days critical boat passage depth at these transects is achieved, an allowable flow reduction of 92 cfs (21.92%) was determined (Table 6-3).

Table 6-1. Results for Evaluation of Canoe and Kayak Passage Metrics. Metric defined as a 1.5 ft. depth at transect thalweg

Metric				Model Results		
Transect	Minimum Substrate Elevation (NAVD 88)	Critical Depth (ft.)	Critical Water Surface Elevation (NAVD 88)	Critical Percentile Flow	Critical Streamflow at Transect, (cfs)	Water Surface Elevation (NAVD 88)
20680	14.07	1.5	15.57	<P1	58.95	17.32
20020	13.18	1.5	14.68	<P1	58.95	16.31
19710	11.13	1.5	12.63	<P1	58.95	15.7
19319	11.52	1.5	13.02	<P1	58.95	15.25
19130	11.52	1.5	13.02	<P1	101.12	15.14
18837	11	1.5	12.5	<P1	101.12	14.99
18623	11.76	1.5	13.26	<P1	101.12	14.88
18119	10.93	1.5	12.43	<P1	118.79	14.54
18040	11.98	1.5	13.48	<P1	118.79	14.43
18013	11.57	1.5	13.07	<P1	118.79	14.38
17986	11.15	1.5	12.65	<P1	118.79	14.36
17965	9.94	1.5	11.44	<P1	118.79	14.1
17937	10.56	1.5	12.06	<P1	118.79	14.07
17914	11.18	1.5	12.68	<P1	118.79	14.03
17583	8.5	1.5	10	<P1	118.79	13.68
17346	10.16	1.5	11.66	<P1	118.79	13.4
17077	9.52	1.5	11.02	<P1	221.64	12.78
16891	8.74	1.5	10.24	<P1	221.64	12.48
16392	7.32	1.5	8.82	<P1	228.52	11.9
15775	4.78	1.5	6.28	<P1	228.52	11.64
14534	5.98	1.5	7.48	<P1	247.18	11.01
13738	4.77	1.5	6.27	<P1	247.18	10.16
12723	3.67	1.5	5.17	<P1	265.37	9.4
11676	3.08	1.5	4.58	<P1	288.48	8.83
10170	1.89	1.5	3.39	<P1	291.01	7.98
9832	2.35	1.5	3.85	<P1	291.01	7.83
8998	0.33	1.5	1.83	<P1	302.78	7.33

8178	1.77	1.5	3.27	<P1	302.78	6.79
7858	0.19	1.5	1.69	<P1	302.78	6.6
7686	-0.65	1.5	0.85	<P1	302.78	6.52
7669	0	1.5	1.5	<P1	302.78	6.52
7649	0.02	1.5	1.52	<P1	302.78	6.52
7624	0.03	1.5	1.53	<P1	302.78	6.32
7608	-0.03	1.5	1.47	<P1	302.78	6.31
7586	-0.27	1.5	1.23	<P1	302.78	6.31
7322	-2.03	1.5	-0.53	<P1	302.78	6.22
7137	-0.77	1.5	0.73	<P1	302.78	6.16
6361	-0.31	1.5	1.19	<P1	302.78	5.9
5946	-1.19	1.5	0.31	<P1	302.78	5.75
4828	-0.15	1.5	1.35	<P1	302.78	5.24
4032	0.01	1.5	1.51	<P1	302.78	4.95
3633	-1.79	1.5	-0.29	<P1	302.78	4.77
3236	0.04	1.5	1.54	<P1	302.78	4.51
2851	-4.39	1.5	-2.89	<P1	302.78	4.51
2360	-2.25	1.5	-0.75	<P1	302.78	4.51
1727	-2.77	1.5	-1.27	<P1	302.78	4.5
3	-5	1.5	-3.5	<P1	302.78	4.5

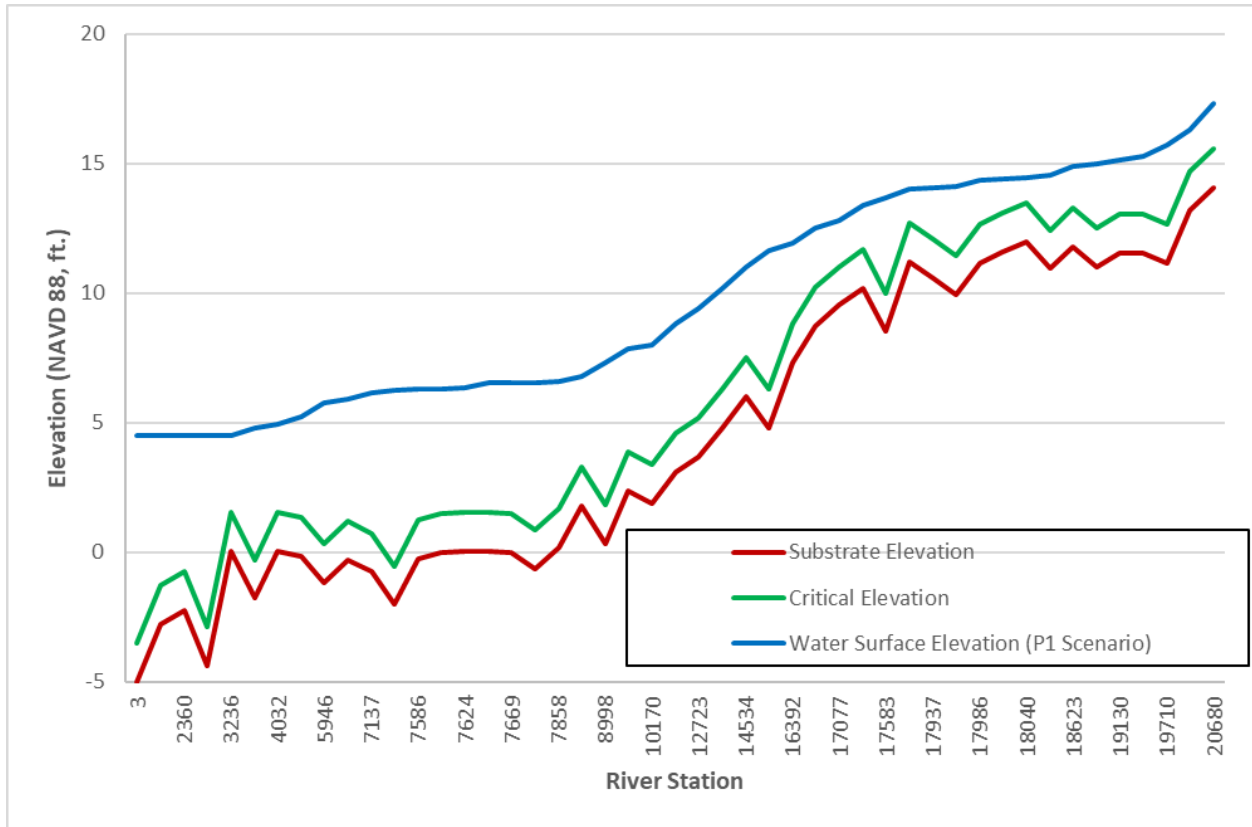


Figure 6-1. Critical Elevation and Minimum Modeled Water Levels for Safe Canoe/Kayak Passage Along Econfina Creek

Table 6-2. Results for Evaluation of Power Boat Passage Metrics. Metric defined as: 1- Minimum 2 ft. depth across a 15 ft. continuous width for transects 18013 and above. 2- Minimum 2 ft. depth across a 30 ft. Continuous width for transect 17986 and below.

Metric				Model Results		
Transect	Minimum Substrate Elevation (NAVD 88)	Critical Depth (ft.)	Critical Water Surface Elevation (NAVD 88)	Critical Percentile Flow	Critical Streamflow at Transect, (cfs)	Water Surface Elevation (NAVD 88)
20680	15.62	2	17.62	2	80.53	17.72
20020	14.1	2	16.1	<P1	58.95	16.31
19710	14.2	2	16.2	3	93.95	16.3
19319	12.6	2	14.6	<P1	58.95	15.25
19130	12.2	2	14.2	<P1	101.12	15.14
18837	11.44	2	13.44	<P1	101.12	14.99
18623	12.1	2	14.1	<P1	101.12	14.88
18119	11.4	2	13.4	<P1	118.78	14.54
18040	12.18	2	14.18	<P1	118.78	14.43
18013	12.11	2	14.11	<P1	118.78	14.38

17986	12.26	2	14.26	<P1	118.78	14.36
17965	12.01	2	14.01	<P1	118.78	14.1
17937	12.16	2	14.16	2	140.36	14.35
17914	11.62	2	13.62	<P1	118.78	14.03
17583	10.4	2	12.4	<P1	118.78	13.68
17346	11.3	2	13.3	<P1	118.78	13.4
17077	9.77	2	11.77	<P1	221.64	12.78
16891	9.03	2	11.03	<P1	221.64	12.48
16392	8.6	2	10.6	<P1	228.52	11.9
15775	6.03	2	8.03	<P1	228.52	11.64
14534	7.59	2	9.59	<P1	247.18	11.01
13738	5.95	2	7.95	<P1	247.18	10.16
12723	4.55	2	6.55	<P1	265.37	9.4
11676	4.24	2	6.24	<P1	288.48	8.83
10170	2.32	2	4.32	<P1	291.01	7.98
9832	2.8	2	4.8	<P1	291.01	7.83
8998	2.39	2	4.39	<P1	302.78	7.33
8178	1.93	2	3.93	<P1	302.78	6.79
7858	2.09	2	4.09	<P1	302.78	6.6
7686	1.33	2	3.33	<P1	302.78	6.52
7669	0.07	2	2.07	<P1	302.78	6.52
7649	0.44	2	2.44	<P1	302.78	6.52
7624	0.2	2	2.2	<P1	302.78	6.32
7608	0.15	2	2.15	<P1	302.78	6.31
7586	1.1	2	3.1	<P1	302.78	6.31
7322	2.1	2	4.1	<P1	302.78	6.22
7137	0.88	2	2.88	<P1	302.78	6.16
6361	0.79	2	2.79	<P1	302.78	5.9
5946	0.59	2	2.59	<P1	302.78	5.75
4828	0.53	2	2.53	<P1	302.78	5.24
4032	0.48	2	2.48	<P1	302.78	4.95
3633	1.25	2	3.25	<P1	302.78	4.77
3236	2.26	2	4.26	<P1	302.78	4.51
2851	-2.44	2	-0.44	<P1	302.78	4.51
2360	0.52	2	2.52	<P1	302.78	4.51
1727	-0.22	2	1.78	<P1	302.78	4.5
3	0.25	2	2.25	<P1	302.78	4.5

Table 6-3. Calculation of Allowable Flow Reductions for Critical Boat Passage Transects

Model Results				15% Decrease		Allowable Flow Reduction	
Transect	Critical Percentile Flow	Critical Streamflow at Transect (cfs)	Critical Streamflow at Econfina Creek@ CR 388 (cfs)	Adjusted Percentile Flow for a 15% Reduction in Days Exceeded	Flow Associated with 15% reduction in days Exceeded (cfs)	Allowable flow reduction at Econfina Creek@ CR 388	Percent Change
20680	P2	80.53	318.78	16.7	415.78	97.00	23.33
19710	P3	93.95	327.78	17.6	419.78	92.00	21.92
17937	P2	140.36	318.78	16.7	415.78	97.00	23.33

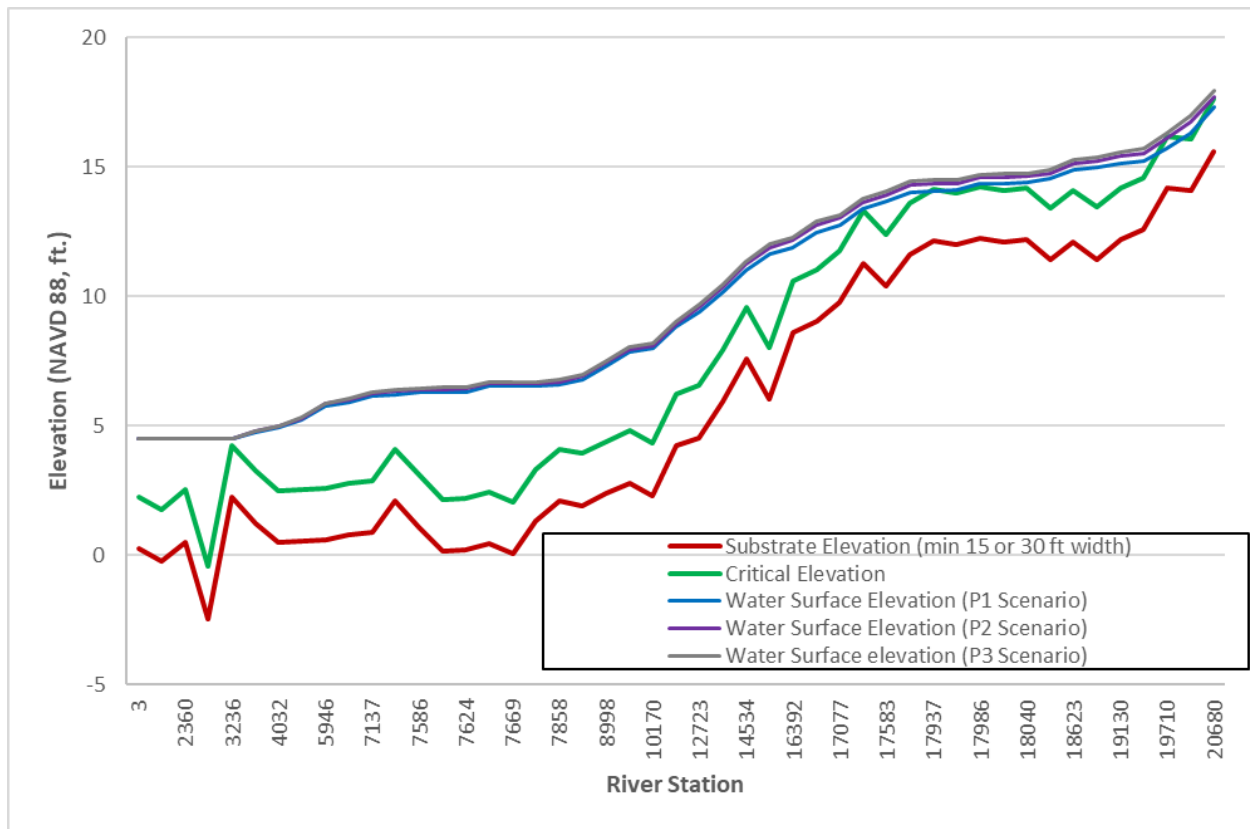


Figure 6-2. Critical Elevation and Minimum Modeled Water Levels for Safe Power Boat Passage Along Econfina Creek

6.1.3 Fish Passage

As described in Section 4, fish passage was determined to be a relevant indicator for WRV 2- Fish and Wildlife Habitat and the Passage of Fish. A minimum thalweg depth of 0.6 ft. was used as the metric for safe fish passage. The critical elevation (NAVD 88) for fish passage was determined by adding 0.6 ft. to the thalweg elevation (minimum elevation in a channel) for each transect (Figure 6-3 and Table 6-4). This metric was assessed for all transects in the study area utilizing the methodology described above in section 6.1.1.

Based on this methodology, safe fish passage was possible at all transects evaluated in the study area under all flow scenarios (Figure 6-3 and Table 6-4). Even under the lowest flow scenario, modeled water depth was above critical depth at the most restrictive transect (18040). Under the lowest flow scenario at the most restrictive transect, water levels were simulated to be 1.85 ft. above critical depth. Since flows limiting fish passage were not observed during the baseline time period, this metric was not considered further for MFL determination.

Table 6-4. Results for Evaluation of Fish Passage. Metric defined as a 0.6 ft. depth at transect thalweg.

Metric				Model Results		
Transect	Minimum Substrate Elevation (NAVD 88)	Critical Depth (ft.)	Critical Water Surface Elevation (NAVD 88)	Critical Percentile Flow	Critical Streamflow at Transect (cfs)	Water Surface Elevation (NAVD 88)
20680	14.07	0.6	14.67	<P1	58.95	17.32
20020	13.18	0.6	13.78	<P1	58.95	16.31
19710	11.13	0.6	11.73	<P1	58.95	15.7
19319	11.52	0.6	12.12	<P1	58.95	15.25
19130	11.52	0.6	12.12	<P1	101.12	15.14
18837	11	0.6	11.6	<P1	101.12	14.99
18623	11.76	0.6	12.36	<P1	101.12	14.88
18119	10.93	0.6	11.53	<P1	118.78	14.54
18040	11.98	0.6	12.58	<P1	118.78	14.43
18013	11.57	0.6	12.17	<P1	118.78	14.38
17986	11.15	0.6	11.75	<P1	118.78	14.36
17965	9.94	0.6	10.54	<P1	118.78	14.1
17937	10.56	0.6	11.16	<P1	118.78	14.07
17914	11.18	0.6	11.78	<P1	118.78	14.03
17583	8.5	0.6	9.1	<P1	118.78	13.68
17346	10.16	0.6	10.76	<P1	118.78	13.4
17077	9.52	0.6	10.12	<P1	221.64	12.78
16891	8.74	0.6	9.34	<P1	221.64	12.48
16392	7.32	0.6	7.92	<P1	228.52	11.9
15775	4.78	0.6	5.38	<P1	228.52	11.64
14534	5.98	0.6	6.58	<P1	247.18	11.01
13738	4.77	0.6	5.37	<P1	247.18	10.16
12723	3.67	0.6	4.27	<P1	265.37	9.4
11676	3.08	0.6	3.68	<P1	288.48	8.83
10170	1.89	0.6	2.49	<P1	291.01	7.98
9832	2.35	0.6	2.95	<P1	291.01	7.83
8998	0.33	0.6	0.93	<P1	302.78	7.33
8178	1.77	0.6	2.37	<P1	302.78	6.79
7858	0.19	0.6	0.79	<P1	302.78	6.6

7686	-0.65	0.6	-0.05	<P1	302.78	6.52
7669	0	0.6	0.6	<P1	302.78	6.52
7649	0.02	0.6	0.62	<P1	302.78	6.52
7624	0.03	0.6	0.63	<P1	302.78	6.32
7608	-0.03	0.6	0.57	<P1	302.78	6.31
7586	-0.27	0.6	0.33	<P1	302.78	6.31
7322	-2.03	0.6	-1.43	<P1	302.78	6.22
7137	-0.77	0.6	-0.17	<P1	302.78	6.16
6361	-0.31	0.6	0.29	<P1	302.78	5.9
5946	-1.19	0.6	-0.59	<P1	302.78	5.75
4828	-0.15	0.6	0.45	<P1	302.78	5.24
4032	0.01	0.6	0.61	<P1	302.78	4.95
3633	-1.79	0.6	-1.19	<P1	302.78	4.77
3236	0.04	0.6	0.64	<P1	302.78	4.51
2851	-4.39	0.6	-3.79	<P1	302.78	4.51
2360	-2.25	0.6	-1.65	<P1	302.78	4.51
1727	-2.77	0.6	-2.17	<P1	302.78	4.5
3	-5	0.6	-4.4	<P1	302.78	4.5

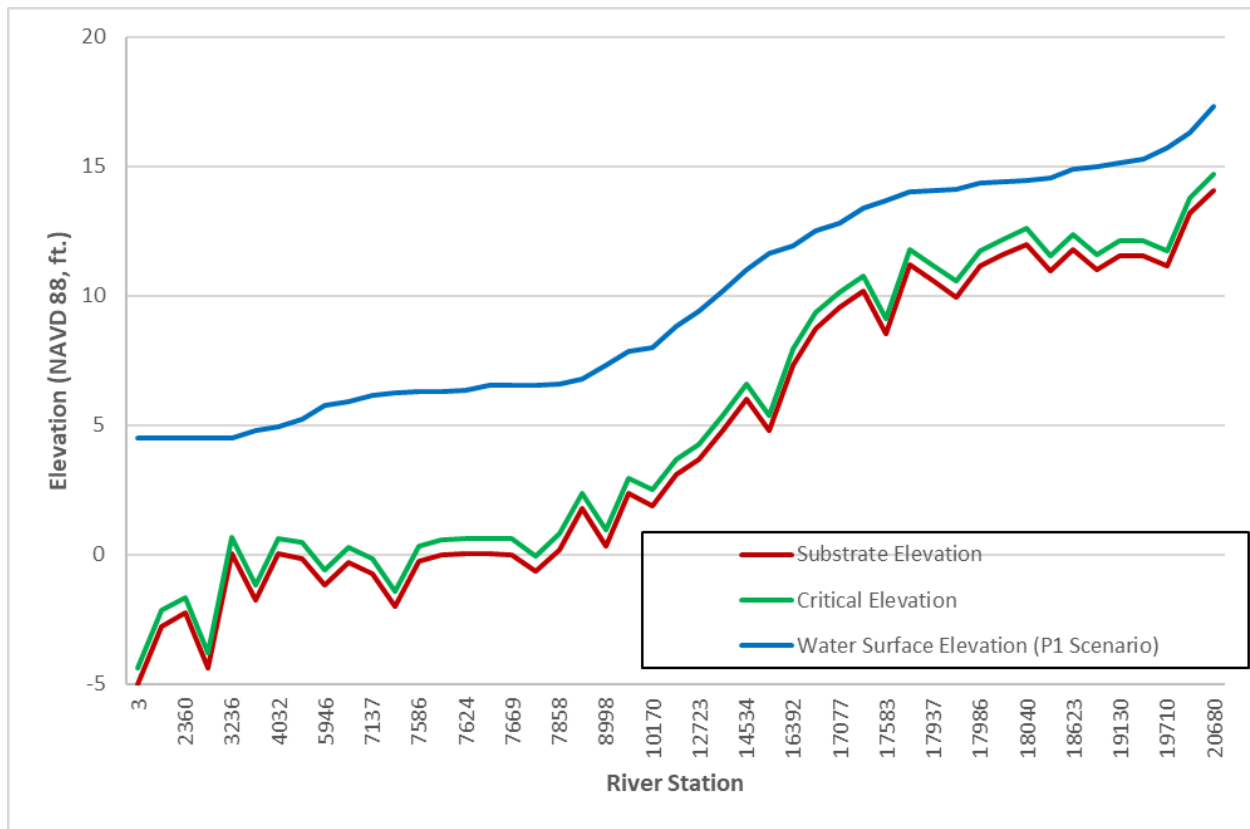


Figure 6-3. Critical Elevation and Minimum Modeled Water Levels for Safe Fish Passage Along Econfina Creek

6.2 Bankfull and Out-of-Bank Flow Evaluation

Bankfull flow is defined as the streamflow resulting in river stage at the interface between the open channel and the alluvial floodplain (AMEC 2012). Out-of-bank flows are therefore flows resulting in river stages in excess of that for bankfull flow, which begins to inundate floodplain communities. Protection of bankfull and out-of-bank flows may contribute to preserving the ecological health of Econfina Creek. These flow conditions allow for inundation of floodplain communities, which allows support of the extent and integrity as well as improved overall productivity of these communities (SRWMD 2015). Floodplain inundation also provides additional nutrients to the river, through transfer of detrital matter (SRWMD 2013). Additionally, bankfull flow is effective at maintaining channel dimensions and overall integrity or fluvial geomorphology of riverine systems (AMEC 2012). One aspect of this is maintenance of sediment transport mechanisms, which allows for maintenance of a riverine system's dynamic equilibrium, which in turn maintains the overall integrity of the system. If this balance is not maintained, excessive scour and/or deposition could occur altering the dynamic equilibrium of the system (SRWMD 2021). Given the karst nature of Econfina Creek, it is probable most of the creek's sediment load is carried at higher flows. Therefore, protection of bankfull and out-of-bank flows are anticipated to protect sediment transport along Econfina Creek.

An assessment bankfull and of out-of-bank flows was considered for establishment of Econfina Creek MFLs providing protection for several WRVs including:

- Fish and Wildlife Habitat and the Passage of Fish: Inundation of Floodplain Communities
- Transfer of Detrital Material
- Maintenance of Freshwater Storage and Supply
- Filtration and Absorption of Nutrients and Other Pollutants
- Sediment Loads

Based on an extensive literature review of methods used to assess bankfull and out-of-bank flows in previous MFL assessments, two methodologies were considered for this assessment based on applicability to Econfina Creek:

- Evaluation of Wetted Perimeter
- Evaluation of Bankfull Profile

Details are presented in the sections below.


6.2.1 Evaluation of Wetted Perimeter


Wetted perimeter is defined as the distance along the stream bed and banks where contact with water is made along a cross-section. Evaluation of the relationship of wetted perimeter versus flow can be utilized to identify portions of a cross section with minimal increase in wetted perimeter per unit flow increase (e.g. river bank) as well as portions of a cross section with large increases in wetted perimeter per unit flow increase (e.g. river bed or floodplain). Inflection points can be identified at the toe of bank, top of bank, and potentially elsewhere where changes in the relationship between wetted perimeter and flow occur.

Evaluation of wetted perimeter to evaluate riparian bank habitat and bankfull flows was conducted for development of previous MFL assessments including the Aucilla/Wacissa River MFL, and the Rainbow River MFL (SRWMD 2016a, SWFWMD 2017b). Based on review of these assessments, a similar evaluation was conducted for the development of Econfina Creek MFLs.

Output from each of the 99 flow scenarios simulated in HEC-RAS (P1-P99) was utilized to determine the wetted perimeter for each transect within the Econfina MFL study area as a function of flow. Transects in the lower portion of the domain below XS 6361 were assessed separately from the rest of the model domain since below this location, Econfina Creek widens as it transitions into Deer Point Lake Reservoir resulting in wetted perimeter on the order of 10-20 times that of the transects throughout most of the model domain. In addition, the topography in the upper portion of the model domain is much steeper than in the lower domain, resulting in portions of the upper domain achieving bankfull flow only at high flows while the lower portion of the model domain achieves bankfull flows regularly. For these reasons, these transects were separated from the rest of the model domain to avoid bias in the weighted wetted perimeter computation from the few transects in the lowest portion of the domain.


To illustrate these differences, an example transect in the upper and lower portion of the modal domain are contrasted in Figures 6-4a, 6-4b, and 6-5. In the vicinity of transect 14534 in the upper portion of the domain, Econfina Creek is sinuous with steep banks and minimal floodplain surrounding the creek. Bankfull flows are achieved only for the 96th percentile flow at this location. In contrast, in the vicinity of transect 4828 in the lower portion of the domain, Econfina Creek is wide and flat with an extensive floodplain and less defined banks. Bankfull flows are achieved above the 15th percentile flow, with wetted perimeter approximately 10 times that of transect 14534 once bankfull flow is achieved at transect 4828.

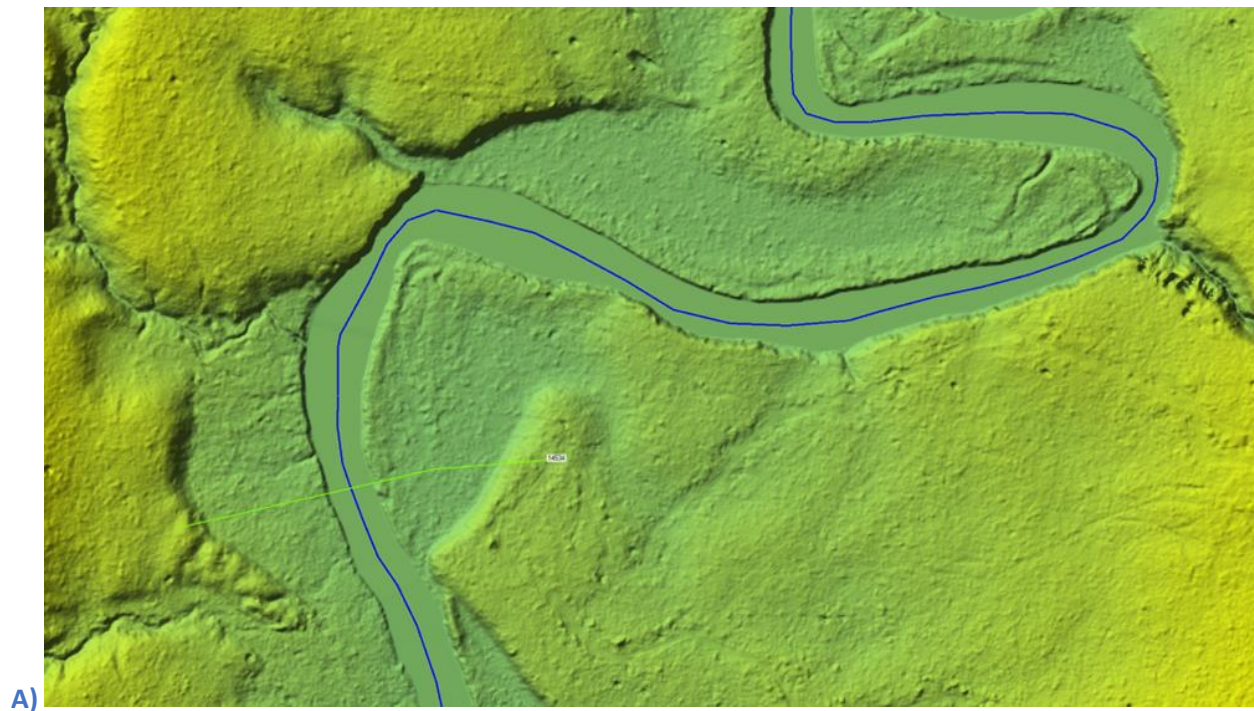

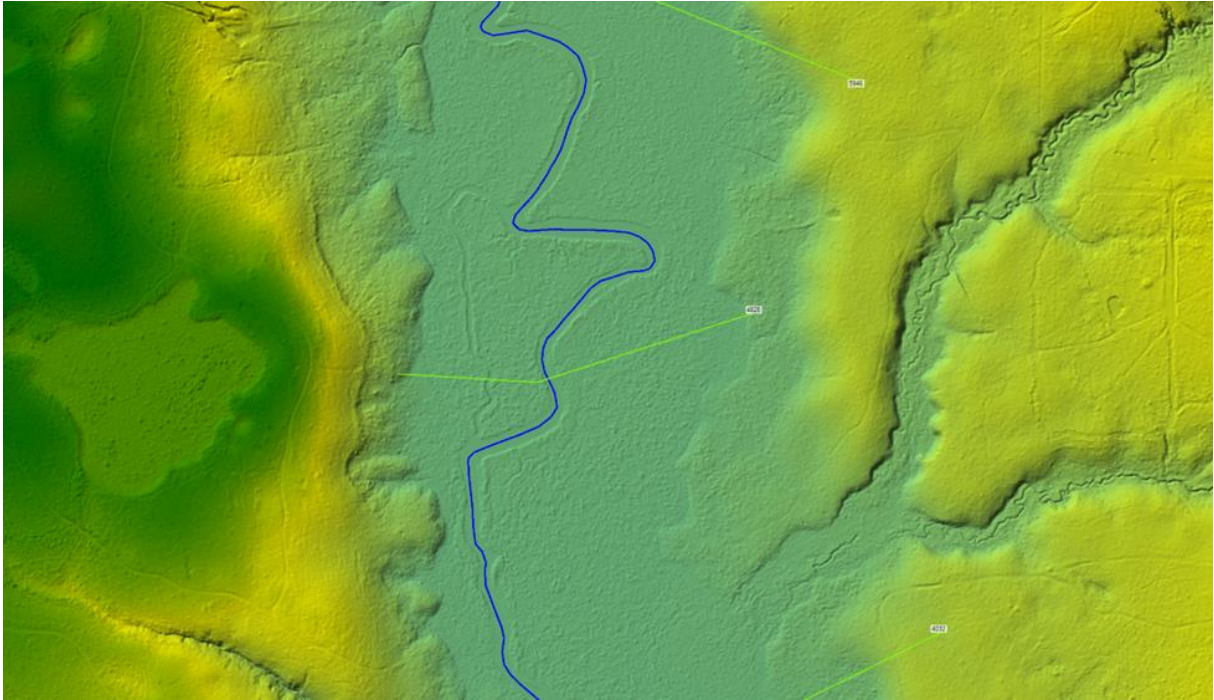


B)

Figure 6-4. Example Topography in the Upper and Lower Portion of the Domain A) Zoomed in B) Zoomed out

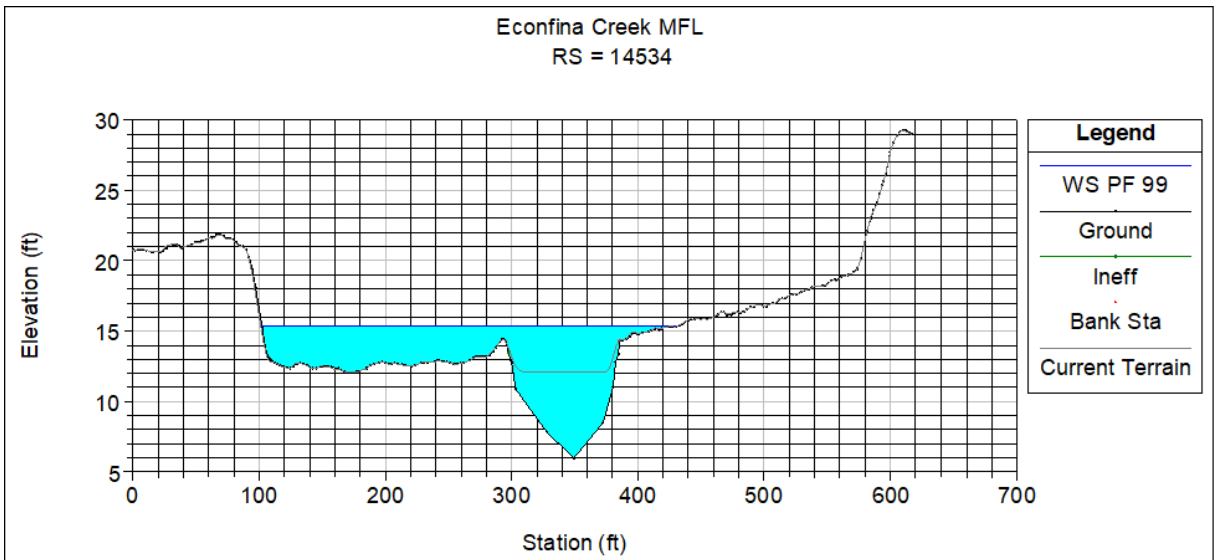

A)

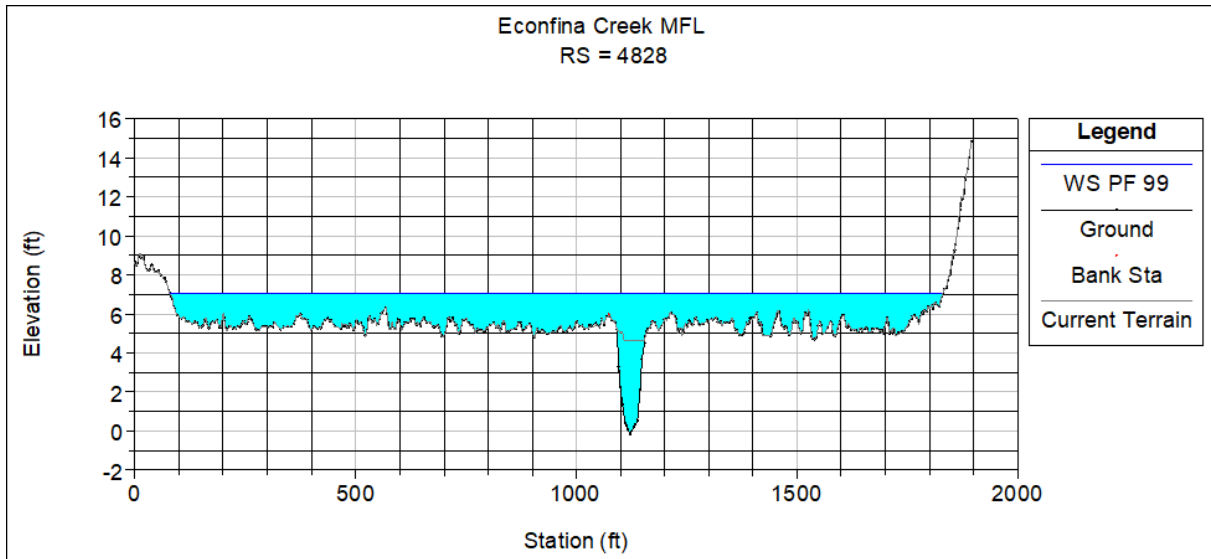

B)

Figure 6-5. Example Model Transect in the Upper and Lower Portion of the Domain. Flows depicted are for the 99 percent percentile **A)** [text] **B)** [text]

For each flow scenario, the average wetted perimeter per subreach was computed as the average wetted perimeter for the immediate upstream and downstream transect. A subreach is defined as the distance between adjacent transects. For each flow scenario, the weighted wetted perimeter for the study area was computed by summing the product of average subreach wetted perimeters and subreach lengths and dividing that quantity by the total river reach length. The resulting plot of weighted wetted perimeter versus flow at Econfina Creek @ CR 388 for all model transects including and above XS 6361 is shown in Figure 6-6. The resulting plot of weighted wetted perimeter versus flow at Econfina Creek @ CR 388 for all model transects below XS 6361 is shown in Figure 6-7. Review of Figure 6-6 showed an inflection point at 709 cfs (P90 scenario) suggesting the top of bank. A possible inflection point at 417 cfs (P17) was identified suggesting the toe of bank. Review of Figure 6-7 showed an inflection point at 484 cfs (P40 scenario) suggesting the top of bank. This was selected at the approximate point of the curve where the rate of change of weighted wetted perimeter with respect to flow was equal to 1. For flows greater than 484 cfs, the rate of change of wetted perimeter per unit increase in flow is less than 1, suggesting out of bank flows. A possible inflection point at 328 cfs (P3) was identified suggesting the toe of bank. Further inflection points were not identified anywhere else within the riparian bank (between toe and top of bank).

For the identified inflection points, the allowable change in flow was determined based on a 15% reduction in weighted wetted perimeter. For the upper inflection points, this would be protective of riparian bank habitat in the vicinity of the top of bank, providing protection to WRVs associated with bankfull and out-of-bank flows. For the lower inflection points, this would be protective of snag and root and similar woody habitat occurring near the toe of bank. For the top of bank inflection points, a 15% reduction in weighted wetted perimeter resulted in an allowable flow reduction of 10.78%, based on the analysis of model transects including and above XS 6361, and an allowable flow reduction of 47.59%, based on the analysis of model transects below XS 6361 (Table 6-5, Table 6-6). For the toe of bank

inflection points, a 15% reduction in weighted wetted perimeter resulted in a weighted wetted perimeter which was met under all flow scenarios modeled. Therefore, the toe of bank inflection point was not considered further for MFL determination.

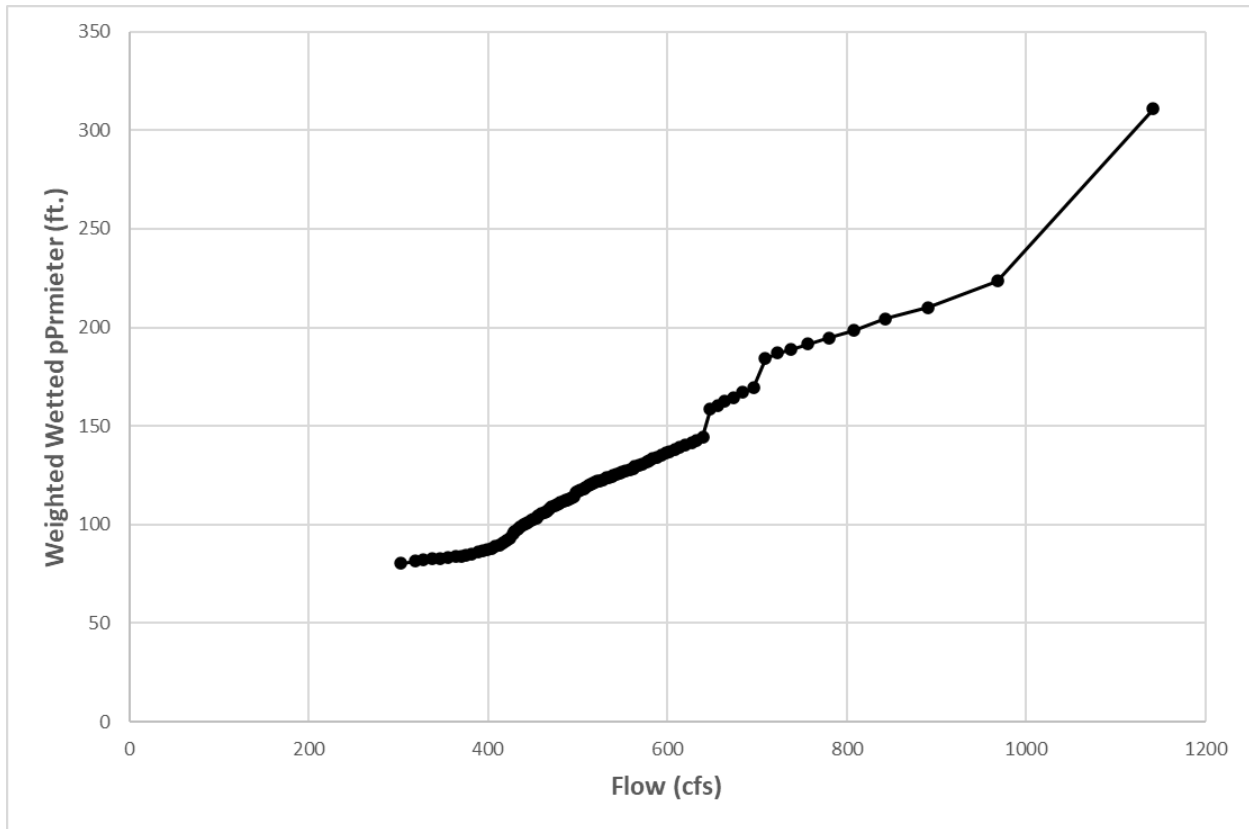


Figure 6-6. Average Transect Weighted Wetted Perimeter versus Flow at Econfina Creek @ CR 388, above XS 6361

Table 6-5. Flow Reduction Associated with 15% Reduction in Weighted Wetted Perimeter (WWP), above XS 6361

Model Results			15% Decrease		Allowable Flow Reduction	
Inflection Point	WWP, ft.	Adjusted streamflow at Econfina Creek@ CR 388 (cfs)	Flow Associated with 15% reduction in WWP (cfs)	Reduced WWP, ft.	Allowable flow reduction at Econfina Creek@ CR 388	Percent Change
Top of Bank (P90)	184.30	708.78	639.8	156.65	69	10.78
Toe of Bank* (P17)	90.68	416.78	<303	77.08	n/a	n/a

*For the Toe of Bank, the lowest modeled WWP was 26.46 ft. for the P1 scenario (301 cfs). Therefore, this condition is always met.

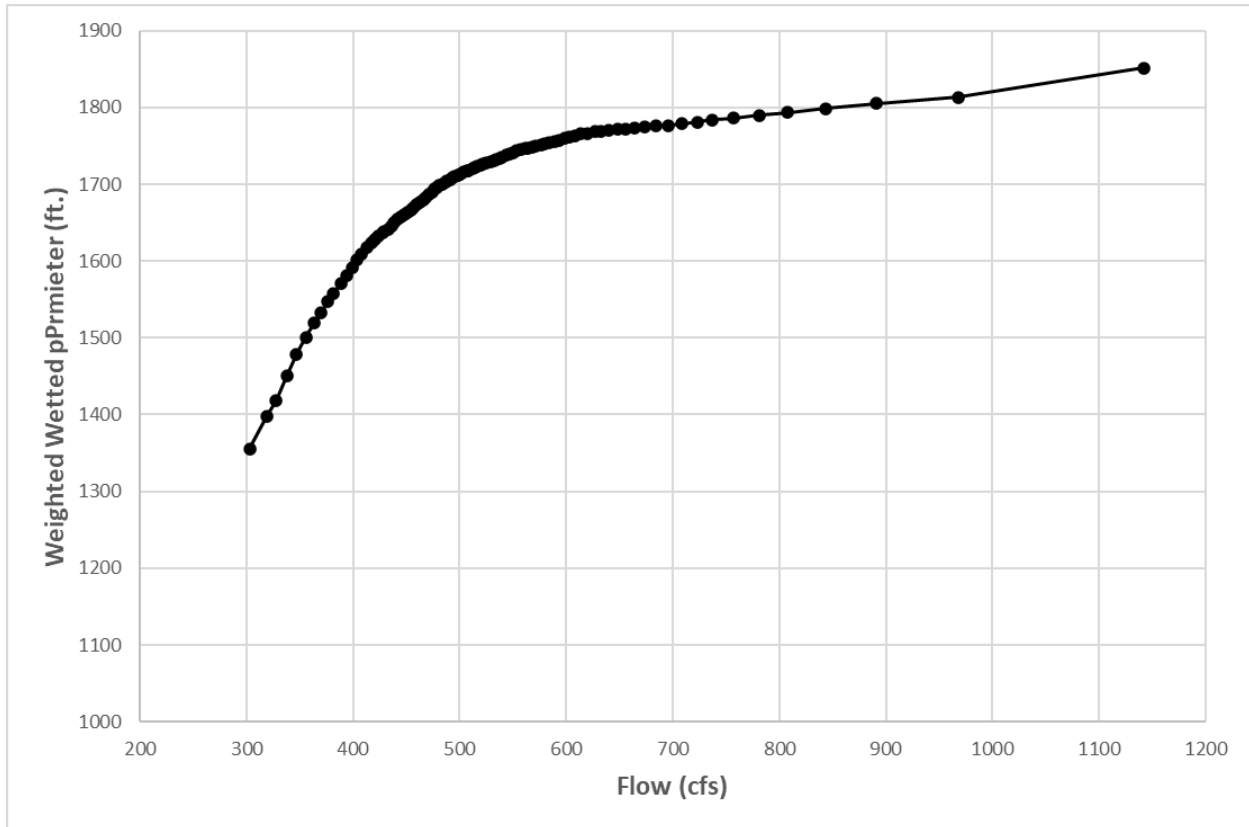


Figure 6-7. Average Transect Weighted Wetted Perimeter versus Flow at Econfina Creek @ SR 20 below XS 6361

Table 6-6. Flow Reduction Associated with 15% Reduction in Weighted Wetted Perimeter (WWP), below XS 6361

Model Results			15% Decrease		Allowable Flow Reduction	
Inflection Point	WWP, ft.	Adjusted streamflow at Econfina Creek@ CR 388, cfs	Flow Associated with 15% reduction in WWP (cfs)	Reduced WWP, ft.	Allowable flow reduction at Econfina Creek@ CR 388	Percent Change
Top of Bank (P40)	1,700.59	483.78	327.8	1,445.51	156	47.59
Toe of Bank* (P3)	1,418.45	327.78	<303	1,205.68	n/a	n/a

*For the Toe of Bank, the lowest modeled WWP was 365.78 ft. for the P1 scenario (301 cfs). Therefore, this condition is always met.

6.2.2 Evaluation of Bankfull Profile

An alternative method of evaluating bankfull and out-of-bank flows is to evaluate flows required to achieve water surface elevations which meet or exceed top of bank elevations. This approach has been utilized in several previous MFL assessments, including the Lower Sante Fe and Ichetucknee Rivers MFL, the Middle Suwannee River MFL, and Econfina River MFL (SRWMD 2021, SRWMD 2016c, SRWMD 2015). The first step of this method is to determine right and left top of bank elevations along the river, defined as the elevation at which the stream just begins to overflow onto the floodplain. These elevations can be determined through field investigations of bankfull indicators such as the elevation where the slope becomes level, inflections or breaks in the slope of the bank, and scour lines and undercuts in the bank found around plant roots (AMEC 2012).

For the purposes of determining top of bank elevations for evaluation of bankfull flows for Econfina Creek MFLs, the high-resolution generated terrain with RAS-Mapper combined with elevation transects performed by Southeastern Surveying and Mapping Corporation provided sufficient depiction of Econfina Creek topography within the model domain. High resolution post-Hurricane Michael light detection and ranging (LiDAR) was received by the District in August 2022 which consisted of raster files with 0.76 meter grid cell resolution for the majority of the District, including the study area in the vicinity of Econfina Creek. Post-Hurricane Michael LiDAR for this area was flown between December 2019 and October 2020. District staff developed a mosaic DEM from provided raster files. This DEM was utilized to develop a terrain layer in RAS Mapper which was utilized to determine bank lines and top of bank elevations. In 2021, Southeastern Surveying and Mapping, Corporation (Southeastern) performed 37 cross-section elevation surveys extending from five feet upland of top of bank on either side of the channel between Williford Spring and CR 388 bridge, including notation of top of bank elevation (Southeastern 2021a, Southeastern 2021b). In 2023, Southeastern was contracted to perform an additional 12 cross-section elevation surveys below CR 388 extending to the end of the model domain in Deer Point Lake (Southeastern 2023). These elevation surveys were utilized to refine model cross section geometry, including top of bank elevations.

A bank profile for the length of the study area was determined based on the relationship between minimum of the right and left top of bank elevation for each transect and relative distance downstream (Figure 6-8). A linear regression trendline was determined with an R^2 of 0.9357 indicating a reasonable relationship. This relationship can be utilized to approximate the top of bank elevation at any location along the Econfina Creek study area. Utilizing the bank profile relationship as opposed to directly assessing bankfull flows at individual transects based on top of bank elevations reduces potential error resulting from selection of top of bank elevations at specific locations. At transect 7624 (closest to Econfina Creek @ CR 388 gauge location), the estimated top of bank is 9.47 ft. based on the regression relationship. The actual top of bank elevation is 11.72 ft. at this location. Utilizing either estimate of top of bank at this location results in bankfull flow not being achieved under any flow condition modeled (maximum simulated water surface elevation is 9.34 ft.) Based on this assessment, assessment of bankfull flows based on top of bank elevations and bankfull profile was not considered further for MFL determination.

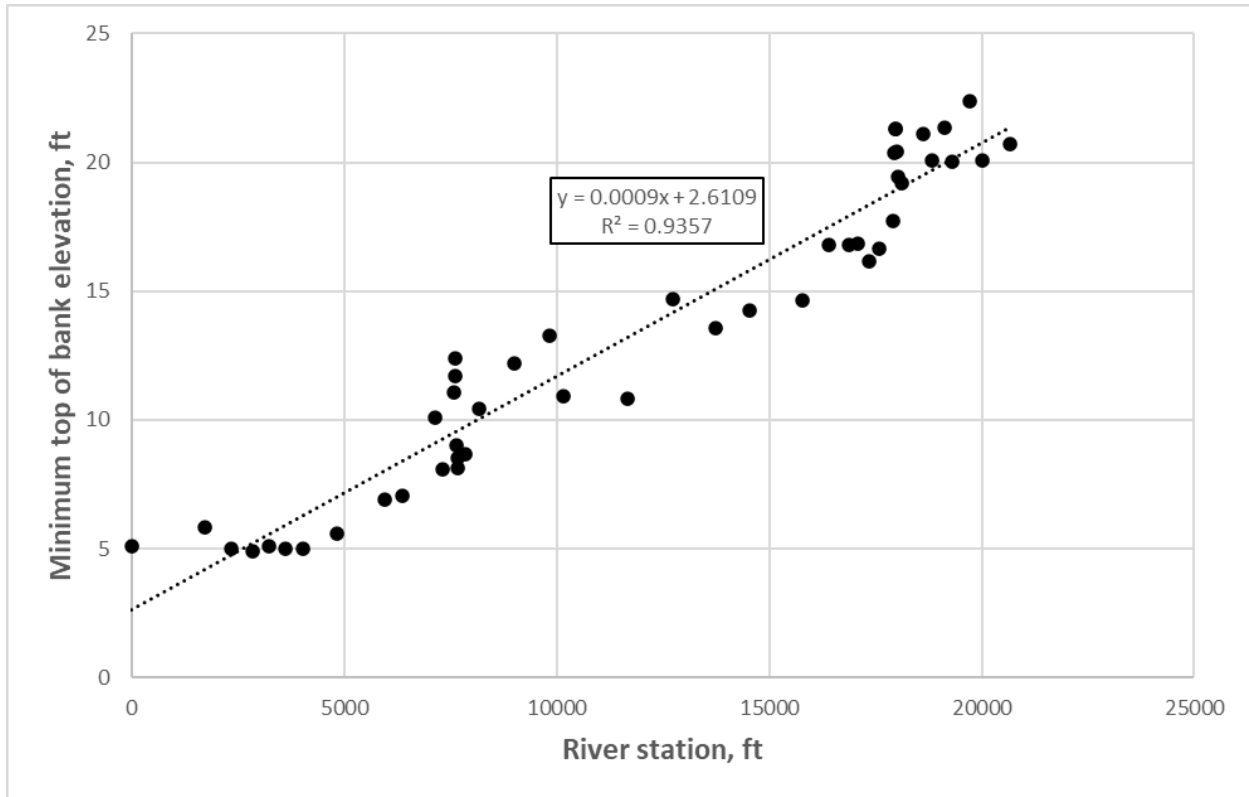


Figure 6-8. Bank Profile for Econfina Creek Study Area

6.3 Evaluation of In Stream Habitat

Output from the SEFA model, described in Section 5.2, was utilized to determine the relationship between Econfina Creek flow and the area weighted suitability (AWS) for aquatic species and guilds. Appendix B presents the SEFA results for the baseline flow scenarios simulated. The mean, median, and maximum AWS and associated Econfina Creek flow at the CR 388 gauge are presented.

Since the SEFA analysis provides an estimate for aggregate AWS for each flow simulated, the relationship between flow and AWS can be used to estimate the reduction in flow that would result in a 15% reduction in AWS for the most sensitive species or guild. Similar to other WRV metrics assessed, a threshold of 15% reduction in AWS was utilized as the protection standard for instream habitat for establishment of MFLs for this assessment. The maximum AWS was selected as the metric of interest as a conservative assumption to protect Econfina Creek instream habitat. Figure 6-9 presents a conceptual depiction of the estimation of the flow that results in a 15% reduction in the maximum AWS for a species or guild of interest.

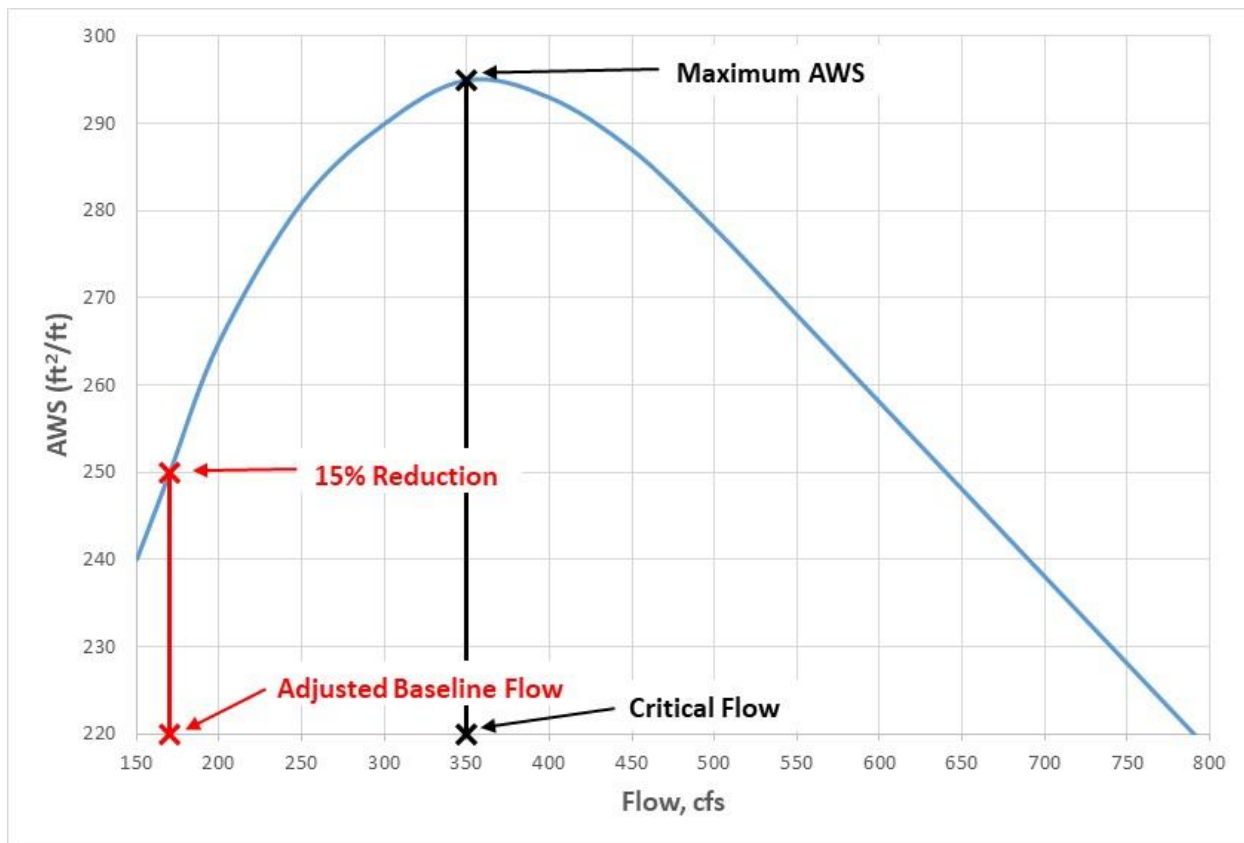


Figure 6-9. Conceptual Depiction of the Estimation of the Critical Flow Resulting in a 15% Reduction in AWS.

The relationship between the AWS and flow for each species or guild assessed, which displayed a reduction in AWS with reduced flow, is shown in Figure 6-10. Species or guilds which displayed an increase in AWS with reduced flow are not displayed and were excluded from further analysis. The flow range that defines the X-axis is the range from simulated baseline flows (P1 - P99) presented in Appendix B. For each of the relevant species or guilds, the maximum AWS was calculated from the resultant output as well as the flow associated with a 15-percent reduction in the maximum AWS (Table 6-7). These critical points are also indicated on the graphics in Figure 6-10.

Based on Table 6-7, the maximum AWS for many of the taxa/life stages occurred at the P99 flow (1141.8 cfs). These results generally reflect lack of sensitivity in most of the taxa/life stages as relatively large flow reductions are required to achieve a 15% allowable reduction in AWS. The slow shallow guild taxa displayed the greatest sensitivity to flow change as a 16.4% flow reduction from the adjusted baseline flow results in a 15% reduction in max AWS and is therefore the critical guild of interest for MFL considerations. A 15% reduction in max AWS for the slow shallow guild translates to an allowable flow reduction of 51 cfs (362 cfs- 311 cfs).

The shallow slow habitat guild describes a set of habitat characteristics shared by many species and life history stages and was defined and utilized previously for instream habitat modeling of the Little Manatee River (Herrick, 2021). These species have similar taxonomic, functional, and life history characteristics and

as a result have similar habitat suitability curves for velocity, depth, and substrate/cover. These species include:

- Redbreast Sunfish (*Lepomis auritus*)
- Bluegill (*Lepomis macrochirus*)
- Largemouth Bass (*Micropterus salmoides*) (juveniles)
- Spotted Sunfish (*Lepomis punctatus*)
- Warmouth (*Lepomis gulosus*)
- Eastern Mosquitofish (*Gambusia holbrooki*)

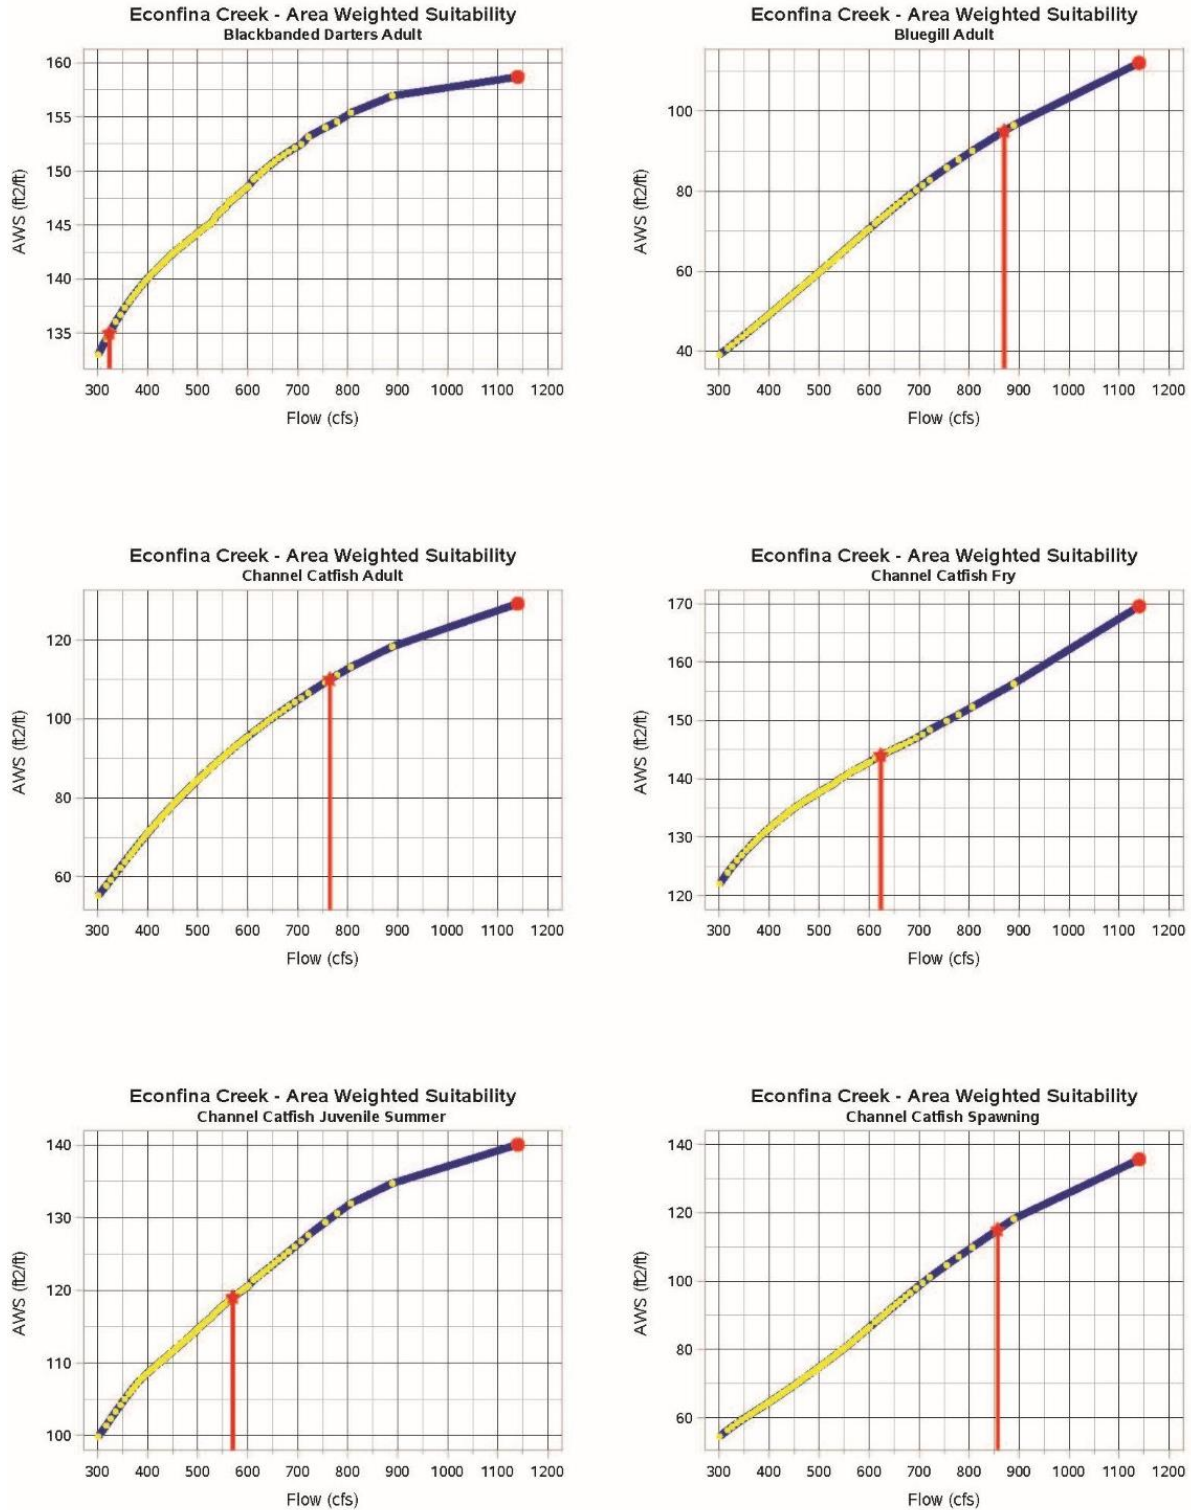


Figure 6-10. Relationship between Flow at Econfina Creek @ CR 388 and AWS for Species and Guilds of Interest.

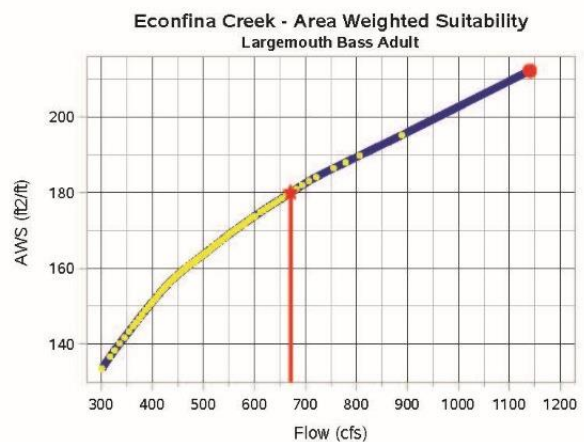
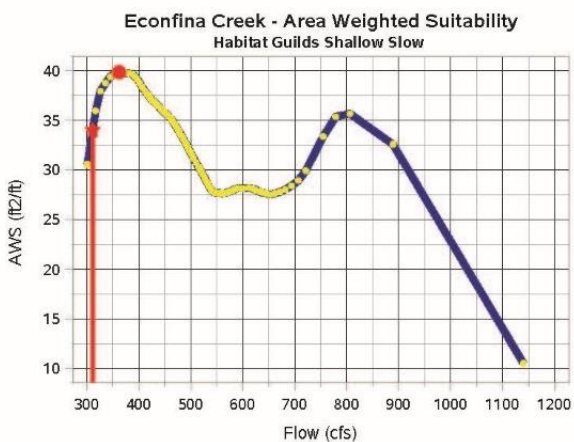
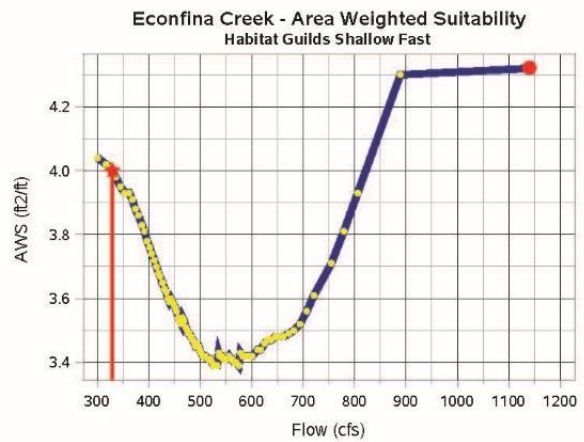
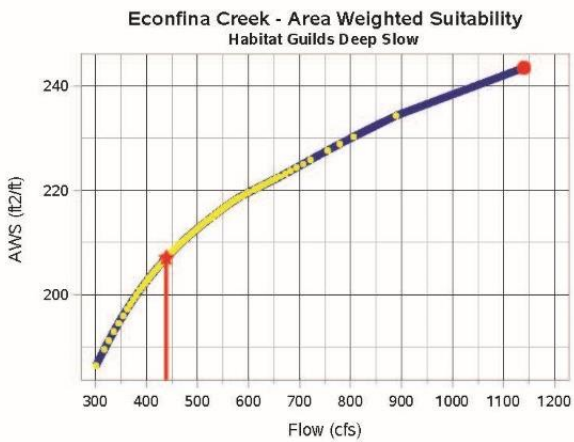
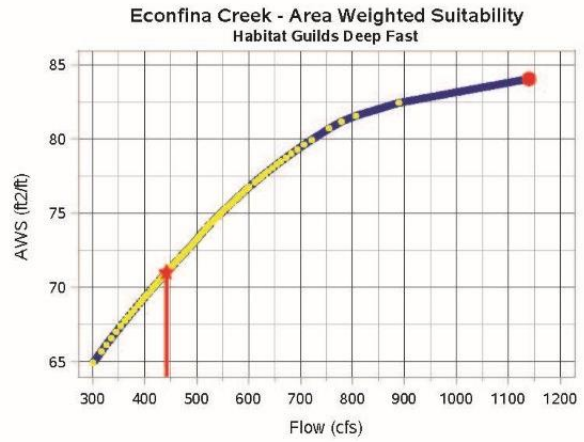
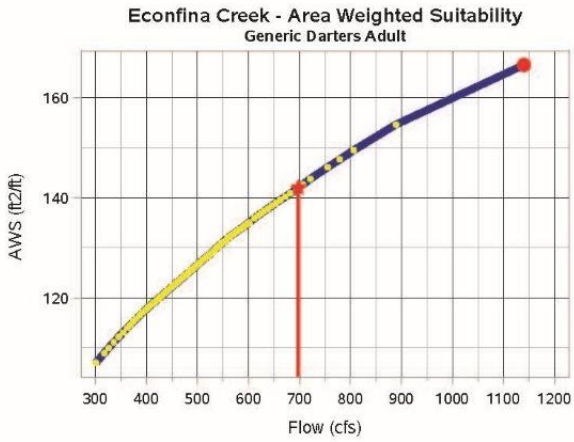


Figure 6-10, continued. Relationship between Flow at Econfina Creek @ CR 388 and AWS for Species and Guilds of Interest

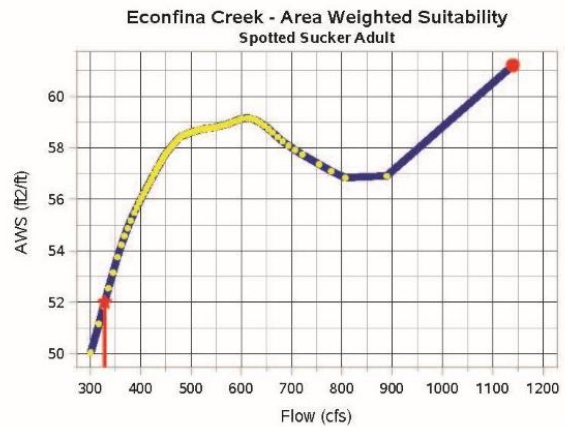
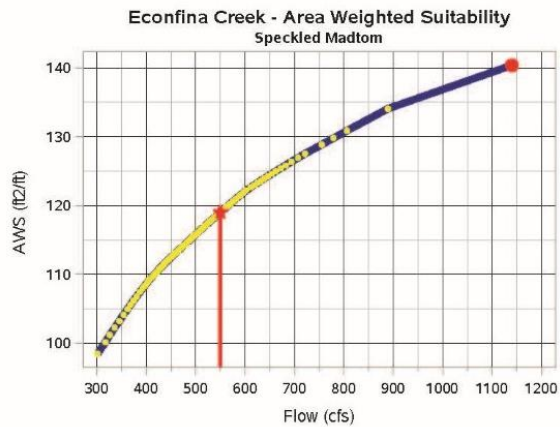
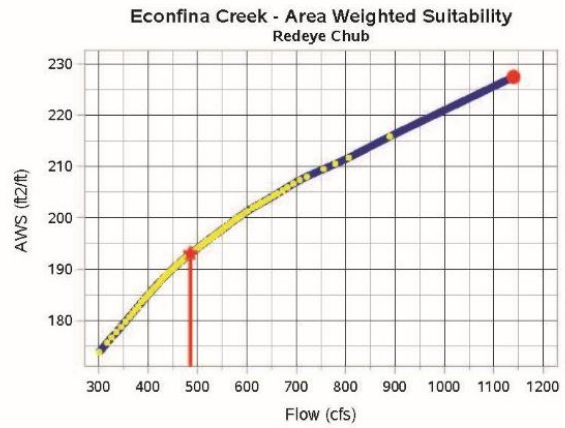
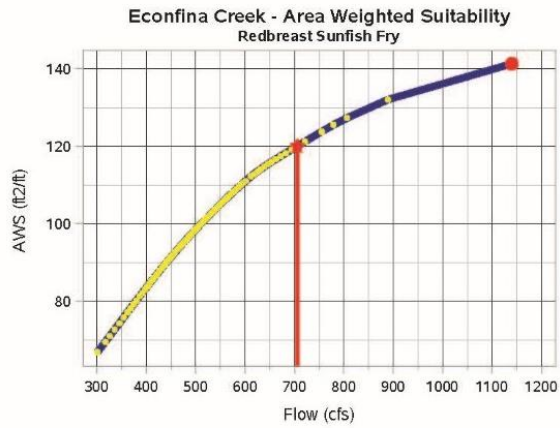
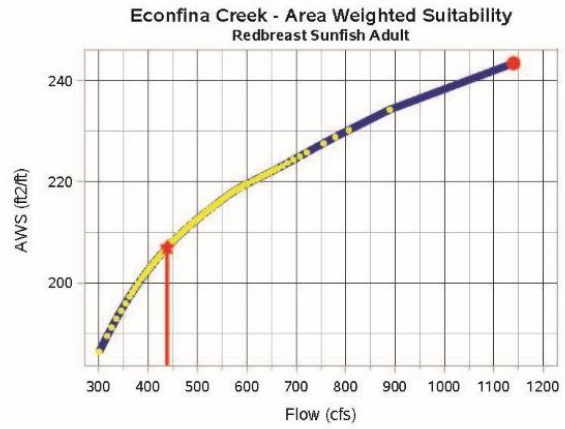
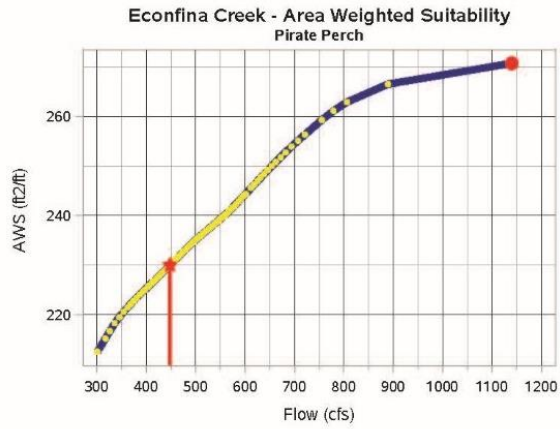


Figure 6-10, continued. Relationship between Flow at Econfina Creek @ CR 388 and AWS for Species and Guilds of Interest

Table 6-7. Flow Reduction Associated with 15% Reduction in Maximum Area Weighted Suitability (AWS)

Taxon	Max. AWS	Econfina Creek @CR 388 Flow @ Maximum AWS, cfs	15% Reduction in Maximum AWS	Econfina Creek @CR 388 Flow @ Reduced Maximum AWS, cfs	Allowable Flow Reduction, cfs	Allowable Flow Reduction Percent Change (From Adjusted Baseline Flow)
Habitat Guild - Shallow Slow	39.8	362	34	311	51	16.4%
Bluegill Adult	112.1	1140	95	870	270	31.0%
Channel Catfish Spawning	135.6	1140	115	857	283	33.0%
Channel Catfish Adult	129.3	1140	110	764	376	49.2%
Redbreast Sunfish Fry	141.3	1140	120	706	434	61.5%
Generic Darters Adult	166.6	1140	142	698	442	63.3%
Largemouth Bass Adult	212.3	1140	180	671	469	69.9%
Channel Catfish Fry	169.6	1140	144	623	517	83.0%
Channel Catfish Juvenile Summer	140	1140	119	570	570	100.0%
Speckled Madtom	140.4	1140	119	550	590	107.3%
Redeye Chub	227.4	1140	193	486	654	134.6%
Pirate Perch	270.8	1140	230	448	692	154.5%
Habitat Guild - Deep Fast	84.1	1140	71	442	698	157.9%
Habitat Guild - Deep Slow	243.4	1140	207	439	701	159.7%
Redbreast Sunfish Adult	243.4	1140	207	439	701	159.7%
Habitat Guild - Shallow Fast	4.3	1140	4	329	811	246.5%
Spotted Sucker Adult	61.2	1140	52	328	812	247.6%
Blackbanded Darters Adult	158.7	1140	135	323	817	252.9%

7 Summary and Recommended Minimum Flows

The development of minimum flows for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group builds upon methods applied elsewhere in Florida, as well as for minimum flows established for St. Marks River Rise and Wakulla and Sally Ward springs by the District. The District's approach toward establishing MFLs for the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group is that an alternative hydrologic regime exists such that the system's water resource values are protected from significant harm caused from water withdrawals. The approach is based on quantifiable relationships between spring discharge and multiple physical and ecological features related to specific water resource values (WRVs). Rule 62-40.473, Florida Administrative Code, outlines requirements regarding specific WRVs which must be considered in setting MFLs (Table 1-1).

The results from the evaluation of multiple WRV metrics were used to determine the recommended minimum flows for Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. Although significant harm is not specifically defined in statute, an allowable 15-percent reduction in WRV metrics has been implemented as the protection standard for multiple MFLs throughout Florida. The 15-percent threshold is also used in this assessment, recognizing additional data collection and long-term research to confirm or refine this threshold for MFL assessments in Florida would be beneficial. The MFL implementation will follow an adaptive management approach, with MFLs periodically reviewed and reevaluated by the District to reflect new data and information. As new data and information are developed regarding the definition of threshold for significant harm, the District will consider this information in future MFL re-evaluations.

The reference gauge selected to establish a combined minimum flow for the middle Econfina Creek system, inclusive of flow inputs from Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group, is the USGS station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388). This station was selected as the reference gauge since it is located downstream of all spring groups of interest and has a sufficient period of record which could be utilized to determine historical baseline conditions (10/1/1935 through 10/14/2023). The Econfina Creek @ SR 20 station was not selected as a reference gauge due to a shorter period of record (11/5/1992 through 10/3/2023) as well as anticipated construction on SR 20 which may require temporarily removing this gauge. In addition, flows at this location are not inclusive of flows at the Gainer Spring Group.

Due to limited flow measurements and absence of long-term continuous flow record for the spring groups of interest, particularly for Williford Spring Group and Sylvan Spring Group, establishment of spring group specific MFLs is not possible currently. The combined average discharge of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group represents approximately 42 percent of the long-term baseline average flow at the Econfina Creek @ CR 388 station. Therefore, the establishment of an MFL at the Econfina Creek @ CR 388 station will be protective of spring discharge from these spring groups.

The Econfina Creek baseline flow record was determined by adjusting the historical reference flow record for USGS station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388) adding in estimated 2020 withdrawals in the contribution area of 1.15 mgd (1.78 cfs) to all flows in the historical record. This serves as a conservative estimate of withdrawal impacts on Econfina Creek baseline flows.

Flow reductions from baseline hydrologic conditions were evaluated at critical flows associated with safe boating and fish passage, maintaining bankfull flows, and protecting instream habitat of aquatic species for Econfina Creek (See Section 6 for details). For each metric evaluated, the critical flow was determined at specific locations throughout Econfina Creek and were translated to an equivalent flow (based on flow percentile) at the reference gauge (Econfina Creek @ CR 388). Allowable reductions in Econfina Creek flow corresponding to a 15-percent reduction in inundation frequency (e.g., time) were determined for metrics pertaining to safe boating and fish passage. Allowable reductions in Econfina Creek flow corresponding to a 15-percent reduction in inundation frequency (e.g., time) as well as a 15-percent reduction in weighted wetted perimeter were determined for metrics pertaining to maintaining bankfull flows. Allowable reductions in Econfina Creek flow corresponding to a 15-percent reduction in maximum area weighted suitability were determined to protect instream habitat of aquatic species.

A summary of allowable flow reductions at Econfina Creek @ CR 388 gauge for each WRV metric evaluated is shown in Table 7-1. The most limiting metric is instream habitat with an allowable flow reduction of 51 cfs associated with a baseline flow at CR 388 of 311 cfs which was associated with shallow water, low velocity fish species. The weighted wetted perimeter top of bank inflection point, above HEC-RAS transect 6361, had an allowable flow reduction of 69 cfs, associated with a baseline flow at CR 388 of 639.8 cfs. The weighted wetted perimeter top of bank inflection point, below HEC-RAS transect 6361, had an allowable flow reduction of 156 cfs, associated with a baseline flow at CR 388 of 327.8 cfs. Safe power boating was achieved throughout the study area for all but the lowest flow scenarios simulated. The critical HEC-RAS transect for power boating is located in the upper reach of the study area, in the vicinity of Williford Spring, where Econfina Creek is relatively narrow and shallow. An allowable flow reduction of 92 cfs, associated with a baseline flow 419.78 cfs was determined for safe passage based on this critical transect. Safe canoe/kayak passage and safe fish passage were achieved under all flow scenarios evaluated throughout the study area. Bankfull conditions were never achieved at transect 7624 (closest to Econfina Creek @ CR 388 gauge location) for any flow scenario evaluated based on the bankfull profile analysis (Section 6.2). Figures 7-1 and 7-2 show collectively the allowable flow reductions associated with each metric evaluated across the range of baseline flows at Econfina CR 388 gauge.

The proposed alternative hydrologic regime for Econfina Creek would shift the baseline flow duration curve downward by the most limiting allowable flow reduction of 51 cfs, across the range of baseline flows for Econfina Creek CR 388 gauge. Setting a single minimum flow at the average daily baseline flow for Econfina Creek CR 388 gauge provides for adequate protection of middle Econfina Creek including Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group. The recommended minimum flow is an allowable flow reduction of 51 cfs from the Econfina Creek @ CR 388 gauge average baseline flow of 537 cfs. This translates to an allowable reduction of 9.5 percent of average baseline Econfina Creek flow (Table 7-2).

Table 7-1. Summary of WRV Metrics and Allowable Flow Reductions at the Econfina CR 388 Gauge

Indicator	WRV Assessment Method	Critical Flow (cfs, flow percentile)	Adjusted Baseline Time Series Flow (cfs, flow percentile)	Allowable Flow Reduction (cfs, percent reduction)
safe power boating passage	percent of time achieved	327.78 (3)	419.78 (17.6)	92 (21.92)
safe canoe/kayak passage	percent of time achieved	limiting depth never achieved in study area		
safe fish passage	percent of time achieved	limiting depth never achieved in study area		
instream habitat (SEFA)	SEFA/ maximum area weighted suitability	362 (7)	311 (1.4)	51 (16.4)
bankfull flow/out of bank flow	weighted wetted perimeter top of bank inflection point, above HEC-RAS transect 6361	708.78 (90)	639.8 (83)	69 (10.78)
bankfull flow/out of bank flow	weighted wetted perimeter top of bank inflection point, below HEC-RAS transect 6361	483.78 (40)	327.8 (3)	156 (47.59)
bankfull flow/out of bank flow	percent of time bankfull flows achieved	bankfull conditions never achieved at transect 7624 (closest to Econfina Creek @ CR 388 gauge location)		

Table 7-2. Recommended Minimum Flow for Middle Econfina Creek, Inclusive of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group

System	Average Baseline Flow at Reference Gauge	Allowable Flow Reduction at Reference Gauge*	Allowable Percent Flow Reduction from Average Baseline Flow
Middle Econfina Creek and Springs (Inclusive of Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group)	537 cfs (347 mgd)	51 cfs (33 mgd)	9.5%

*Reference gauge is USGS station 2359500 Econfina Creek Near Bennett, FL (Econfina Creek @ CR 388).

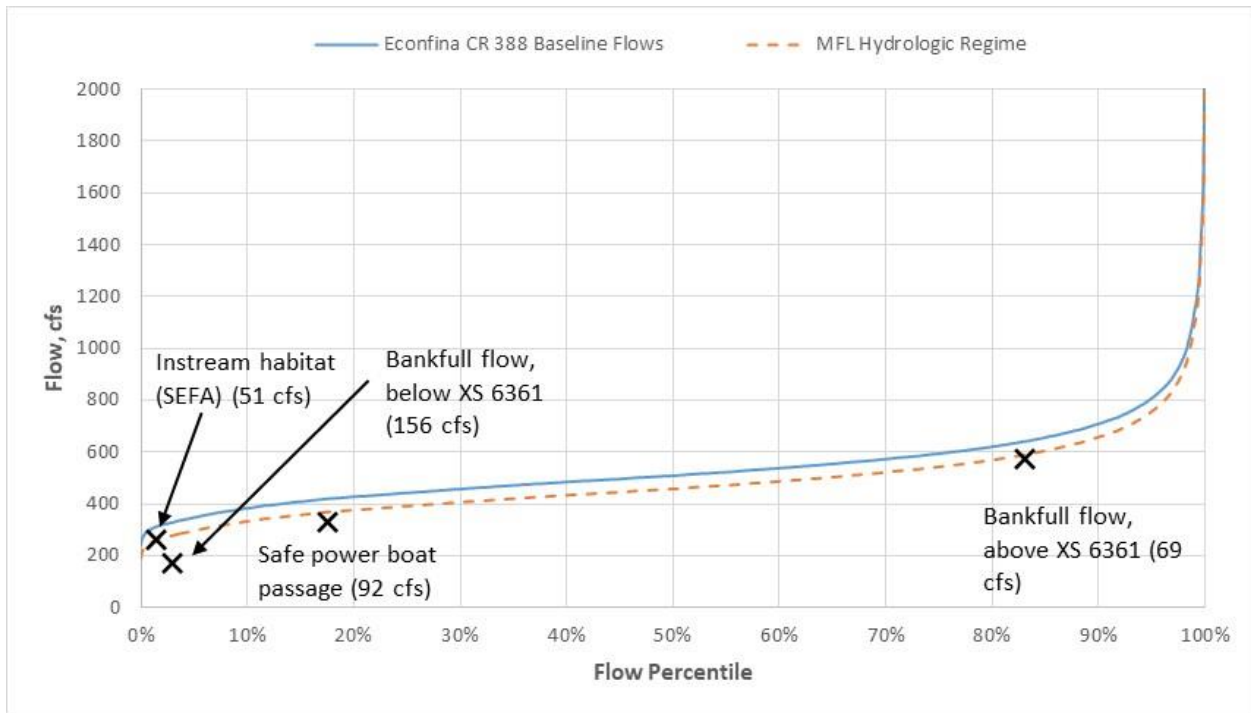


Figure 7-1. Proposed MFL Flow Frequency Curve for Econfinia Creek @ CR 388 for WRV Metrics Evaluated

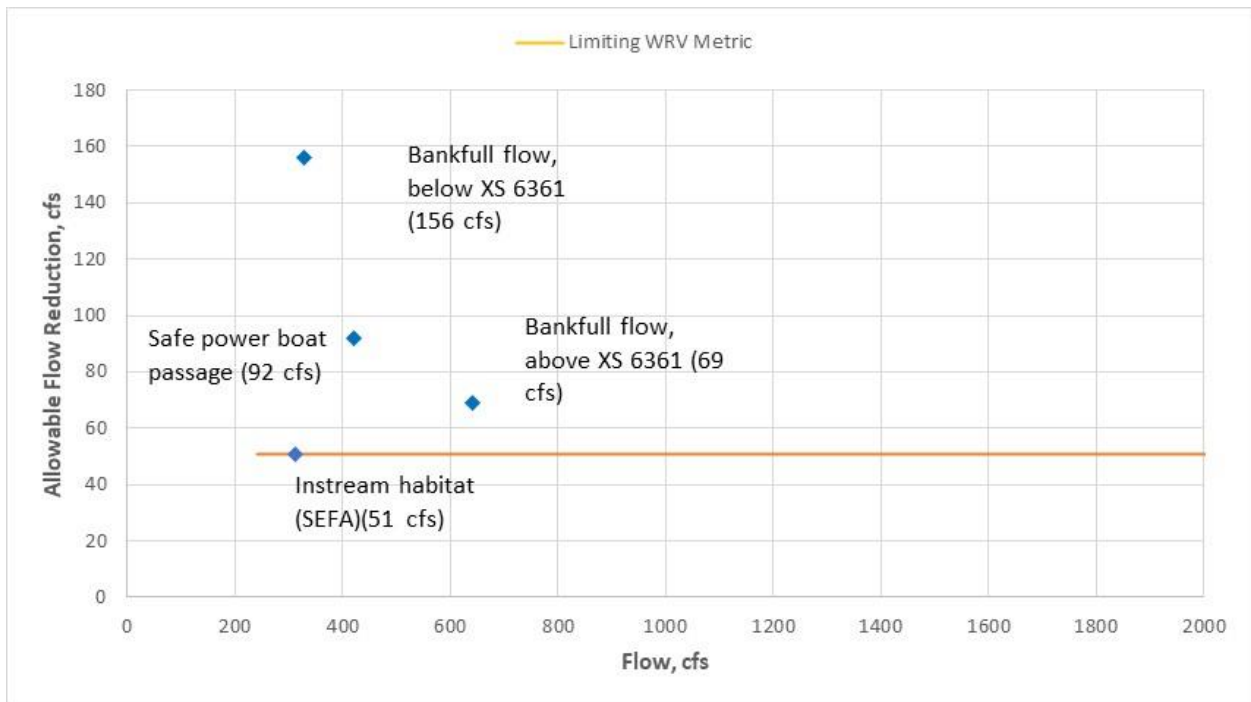


Figure 7-2. Allowable Flow Reductions at Econfinia Creek @ CR 388 for WRV Metrics Evaluated

8 Adaptive Management

The District is committed to taking an adaptive management approach to the Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group MFL assessment. Environmental systems and resources are dynamic systems which are constantly changing. An adaptive management strategy will help ensure that the Econfina Creek Springs Groups are protected from consumptive uses well into the future. As such, the established MFL will be periodically evaluated to check the status of the creek and springs flows in relation to the minimum flow. If warranted, a re-evaluation of the MFL for the system may be recommended. Multiple efforts have already been implemented prior to the completion of this MFL technical assessment to ensure improved monitoring and assessment of the system moving forward. These efforts include, but are not limited to:

1. Continued data collection of ground water levels from wells that have been constructed or instrumented with data loggers to increase the spatial and temporal resolution of aquifer level data within the Econfina Creek watershed,
2. Continued data collection of continuous stage and discharge at Econfina Creek @ SR 20, and Econfina Creek above and below Gainer Spring group stations,
3. Review and/or enhance as appropriate available models used for MFL technical assessments,
4. Continued evaluation of changes in river flows and hydraulics, including continued effects from Hurricane Michael,
5. Review additional data concerning floodplain habitat and woody debris along Econfina Creek as it becomes available and consider for future MFL evaluations.

Additional available data will be incorporated into future MFL reevaluations as appropriate and changes to MFL metrics may be considered.

9 References

- Abbe, T.B. and D.R. Montgomery. 1996. Large Woody Debris Jams, Channel Hydraulics and Habitat Formation in Large Rivers. *Regulated Rivers: Research and Management*. 12: 201-221.
- AMEC Environment and Infrastructure, Inc. 2012. Fluvial Geomorphic Investigation of the Upper Santa Fe River, Lower Santa Fe River and Ichetucknee River. Prepared for the Suwannee River Water Management District.
- Applied Technology and Management, Inc. 2021. Econfina Creek Reconnaissance: Summary of Observations and Recommendations. Final Technical Memorandum.
- Aquatic Habitat Analysts, Inc. 2012. SEFA: System for Environmental Flow Analysis. Available from <http://sefa.co.nz/>. Version 1.8.
- Barrios, K., and A. Chelette. 2004. Econfina Creek Spring Inventory: Washington and Bay Counties, FL. Northwest Florida Water Management District. Water Resources Special Report 04-02.
- Benke, A.C., T.C. Van Arsdall, Jr., and D.M. Gillespie. 1984. Invertebrate Productivity in a Subtropical Blackwater River: The Importance of Habitat and Life History. *Ecological Monographs*. 54 (1): 25-63.
- Benke, A.C., R.L. Henry III, D.M. Gillespie, and R.J. Hunter. 1985. Importance of Snag Habitat for Animal Production in Southeastern Streams. *Fisheries*. Volume 10 (5): 8-13.
- Biggs, B.J.F., D.G. Goring and V.I. Nikora. 1998. Subsidy and stress responses of stream periphyton to gradients in water velocity as a function of community growth form. *Journal of Phycology*. 34: 598-607.
- Campbell, K., 1993a. Geologic Map of Washington County, Florida, Scale: 1:126,720. Florida Geological Survey Open File Map Series 18, 1 sheet, <https://doi.org/10.35256/OFMS18>
- Campbell, K., 1993b. Geologic Map of Bay County, Florida, Scale: 1:126,720. Florida Geological Survey Open File Map Series 19, 1 sheet, <https://doi.org/10.35256/OFMS19>
- Chelette, A. and J. Sutton, 2017, digital communication, geographic information system spatial dataset Econfina_GWCA2017 in Northwest Florida Water Management District geodatabase gis-sql.sde and as shapefile Econfina_GWCA2017.shp
- Crowe, J.B., W. Huang, F.G. Lewis. 2008. Assessment of Freshwater Inflows to North Bay from the Deer Point Watershed of the St. Andrew Bay System. Havana: Northwest Florida Water Management District. Water Resources Assessment 08-01.
- FDACS. 2015. Florida Statewide Agricultural Irrigation Demand (FSAID), Estimated Water Demand, 2015-2035. Prepared for the Florida Department of Agriculture and /Consumer Services (FDACS) by the Balmoral Group.

FDACS. 2022. Florida Statewide Agricultural Irrigation Demand (FSAID), Estimated Water Demand, 2020-2045. Prepared for the Florida Department of Agriculture and /Consumer Services (FDACS) by the Balmoral Group. June 30, 2022.

Florida Department of Environmental Protection. 2019. Florida Land Use Cover and Forms Classification System ((FLUCFCS): 2009. "LU_NWFWMD_2019_JUL23." Florida Department of Environmental Protection. <http://www.fgdl.org/metadataexplorer/explorer.jsp>.

Florida Department of Environmental Protection. 2023. Econfina Creek Paddling Guide. Last updated Sept. 2023. [Econfina Creek Paddling Guide | Florida Department of Environmental Protection](#)

Florida Fish and Wildlife Conservation Commission. 2018. Florida's Endangered and Threatened Species (Updated on December 2018). . <https://myfwc.com/media/1945/threatend-endangered-species.pdf>. Accessed on October 2, 2019.

Florida Fish and Wildlife Conservation Commission. 2019a. Gulf Moccasinshell, *Medionidus penicillatus*, Species Status. <https://myfwc.com/wildlifehabitats/profiles/invertebrates/gulf-moccasinshell/>. Accessed on October 2, 2019.

Florida Fish and Wildlife Conservation Commission. 2019b. Oval pigtoe, *Pleurobema pyriforme*, Species Status. <https://myfwc.com/wildlifehabitats/profiles/invertebrates/oval-pigtoe/>. Accessed on October 2, 2019.

Florida Fish and Wildlife Conservation Commission.2024. Grass Carp, Species Status. <https://myfwc.com/wildlifehabitats/profiles/freshwater/grass-carp/> Accessed on December 19, 2024.

Gore, J., Dahm, C. and C. Klimas. 2002. A Review of "Upper Peace River: An Analysis of Minimum Flows and Levels." August 25, 2002 draft by Ecological Evaluation Section, Resource Conservation and Management Department. Prepared for Southwest Florida Water Management District, Brooksville, Florida.

Helsel, D.R., and Hirsch, R.M., 1992, Studies in environmental science 49—Statistical methods in water resources: Amsterdam, Elsevier, 522 p.

Herrick, G, 2021 Instream Habitat Modeling in the Little Manatee River. Update using System for Environmental Flow Analysis (SEFA). Southwest Florida Water Management District.

Horner, R.R. and E.B. Welch. 1981. Stream periphyton development in relation to current velocity and nutrients. Canadian Journal of Fisheries and Aquatic Sciences. 38: 449-457.

King, S.A. 2012. Effects of Flow on Filamentous algae and nutrient limitation in lotic systems. Dissertation presented to the University of Florida, Gainesville, FL.

Miller, J.A., 1986, Hydrogeologic framework of the Floridan aquifer system in Florida and in parts of Georgia, Alabama, and South Carolina: U.S. Geological Survey Professional Paper 1403–B, 91 p.

- Munson, A. and J. Delfino. 2007. Minimum wet-season flows and levels in Southwest Florida Rivers. *Journal of the American Water Resources*.
- Musgrove, R.H., Foster, J.B., and Toler, L.G., 1965, Water Resources of the Econfina Creek Basin Area in Northwestern Florida, Florida Geological Survey Report of Investigations Number 41, 51 p., 28 fig, 2 tables.
- Nagid, E.J. 2022a. Florida Handbook of Habitat Suitability Indices. Florida Fish and Wildlife Conservation Commission. Final Report to the Southwest Florida Water Management District, Brooksville, Florida. <https://doi.org/10.6095/YQWK-P357>.
- Nagid, E.J. 2022b. Data from: Handbook of Florida Habitat Suitability Indices, Freshwater Streams [Data set]. Florida Fish and Wildlife Conservation Commission - Fish and Wildlife Research Institute. <https://doi.org/10.6095/GJ9W-5H42>.
- Northwest Florida Water Management District. 2017. St. Andrew Bay Watershed Surface Water Improvement and Management Plan, November 2017. Program Development Series 17-08.
- Northwest Florida Water Management District. 2018. 2018 Water Supply Assessment Update. WRA 18-01. December 2018.
- Northwest Florida Water Management District. 2019. Recommended Minimum Flows for the St. Marks River Rise. Leon County, Florida. March 2019.
- Northwest Florida Water Management District. 2020. Changes in Hydrologic Conditions for the Chipola River and Econfina Creek systems due to Hurricane Michael. Draft Technical Report.
- Northwest Florida Water Management District. 2021. Recommended Minimum Flows for Wakulla Spring and Sally Ward Spring. Wakulla County, Florida. March 2021.
- Northwest Florida Water Management District. 2022. Recreational Activities Matrix. <https://nfwwater.com/lands/recreation/recreation-activities-matrix/>. Data accessed on December 1, 2022.
- Northwest Florida Water Management District. 2023. 2023 Water Supply Assessment Update. WRA 23-01. December 2023.
- O'Brien, C.A. and J.D. Williams. 2002. Reproductive biology of freshwater mussels (Bivalvia: Unionidae) endemic to eastern Gulf coastal Plain drainages of Alabama, Florida, and Georgia. *American Malacological Bulletin*. 17: 1417-148.
- Perry, R.G. 1995. Regional Assessment of Land Use Nitrogen Loading of Unconfined Aquifers. Ph.D. Dissertation, University of South Florida, Tampa, Florida.
- Pratt, Thomas R., Richards Christopher J., Milla, Katherine A., Wagner Jeffrey R., Johnson, Jay L., and Curry, Ross J., October 1996, Northwest Florida Water Management District Water Resources Special Report 96-

4, https://nfwwater.com/content/download/6722/48947/WRSR96-04Hydrogeology_of_the_NFWWMD_compressed.pdf

Richards, Christopher J., June 1997, Delineation of the Floridan Aquifer zone of contribution for Econfina Creek and Deer Point Lake, Bay and Washington Counties, Florida, Northwest Florida Water Management District Water Resources Special Report 97-2, https://nfwwater.com/content/download/7337/55302/econfina_recharge.pdf

Rupert, F.R., and Means, G.H., 2009, Geology of Washington County, Florida. Florida Geological Survey Open File Report 95, 16 p., http://publicfiles.dep.state.fl.us/FGS/FGS_Publications/OFR/OFR95rev/WashingtonCo092209.pdf

Schmidt, Walter and Wiggs Clark, Murlene, 1980, Geology of Bay County, Florida, Bulletin 57, Florida Geological Survey, 96 p.

Southeastern Surveying and Mapping Inc. 2021a. Specific Purpose Survey- Econfina Creek Transects and Staff Gauges. Final Report.

Southeastern Surveying and Mapping Inc. 2021b. Specific Purpose Survey- Additional Econfina Creek Transects. Final Report.

Southeastern Surveying and Mapping Inc. 2023. Specific Purpose Survey- Lower Econfina Creek Transects. Final Report.

Southwest Florida Water Management District. 2002. Upper Peace River an Analysis of Minimum Flows and Levels. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

Southwest Florida Water Management District. 2008. Weeki Wachee River System Recommended Minimum Flows and Levels. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

Southwest Florida Water Management District. 2010. Proposed Minimum Flows and Levels for the Lower Peace River and Shell Creek. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida

Southwest Florida Water Management District. 2011. The Determination of Minimum Flows for the Lower Myakka River. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

Southwest Florida Water Management District. 2012a. Recommended Minimum Flows for the Homosassa River System. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

Southwest Florida Water Management District. 2012b. Recommended Minimum Flows for the Chassahowitzka River System. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

Southwest Florida Water Management District. 2017a. Recommended Minimum flow for the Crystal River/Kings Bay System, Revised Final Report. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

Southwest Florida Water Management District. 2017b. Recommended Minimum flow for the Rainbow River System, Revised Final Draft Report. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

Southwest Florida Water Management District. 2023. Recommended Minimum Flows for the Little Manatee River. Final Draft Report. Technical Report of the Southwest Florida Water Management District, Brooksville, Florida.

St. Johns River Water Management District. 2017. Minimum Flows Determination for Silver Springs. Marion County, Florida. Final Report. Technical Publication SJ2017-2, Palatka, Florida.

St. Johns River Water Management District. 2024. Minimum Flows and Levels (MFLs) Reevaluation for the Wekiva River at State Road 46, Wekiwa Springs, Rock Springs, Palm Springs, Sanlando Springs, Starbuck Springs and Miami Springs; and MFLs Determination for the Little Wekiva River, Lake, Orange and Seminole Counties. Draft Technical Publication. St. Johns River Water Management District, Palatka, FL.

Stevenson, R.J. 1996. The stimulation and drag of current. Pages 321-340 in R.J. Stevenson, M.L. Bothwell and R.L. Lowe (editors). Algal ecology: freshwater benthic ecosystems. Academic Press, Inc., San Diego, CA, USA.

Suwannee River Water Management District. 2005. Lower Suwannee River MFLs Technical Report. Suwannee River Water Management District, Live Oak, Florida.

Suwannee River Water Management District. 2007. MFL Establishment for the Upper Santa Fe River. Suwannee River Water Management District, Live Oak, Florida.

Suwannee River Water Management District. 2013. Minimum Flows and Levels for the Lower Santa Fe and Ichetucknee Rivers and Priority Springs.

Suwannee River Water Management District. 2015. Minimum Flows and Levels, Econfina River, Florida. <https://www.srwm.org/DocumentCenter/View/11357>.

Suwannee River Water Management District. 2016a. Minimum Flows and Levels for the Aucilla River, Wacissa River and Priority Springs. Technical Report prepared for the Southwest Florida Water Management District.

Suwannee River Water Management District. 2016b. Minimum Flows and Levels Assessment for the Upper Suwannee River and Priority Springs. Suwannee River Water Management District, Live Oak, Florida.

Suwannee River Water Management District. 2016c. Minimum Flows and Levels Assessment for the Middle Suwannee River and Priority Springs. Suwannee River Water Management District, Live Oak, Florida.

Suwannee River Water Management District. 2021. Minimum Flows and Minimum Water Levels Re-Evaluation for the Lower Santa Fe and Ichetucknee Rivers and Priority Springs, Final Report. Suwannee River Water Management District, Live Oak, Florida.

U.S. Census Bureau. 2022. U.S. Census Block Points. Updated August 15, 2022. [USA Census Block Points - Overview](#)

Williams, J.D., R.S. Butler, G.L. Warren, and N.A. Johnson. 2014. Freshwater Mussels of Florida. University of Alabama Press, Tuscaloosa, Al.

Williams, L.J., and Dixon, J.F., 2015, Digital surfaces and thicknesses of selected hydrogeologic units of the Floridan aquifer system in Florida and parts of Georgia, Alabama, and South Carolina: U.S. Geological Survey Data Series 926, 24 p., <http://dx.doi.org/10.3133/ds926>

Williams, L.J., and Kuniatsky, E.L., 2016, Revised hydrogeologic framework of the Floridan aquifer system in Florida and parts of Georgia, Alabama, and South Carolina (ver 1.1, March 2016): U.S. Geological Survey Professional Paper 1807, 140 p., 23 pls, <http://dx.doi.org/10.3133/pp1807>.

10 Appendices

10.1 Appendix A: Update and Calibration of the Hydrologic Engineering Center River Analysis System (HEC-RAS) Model: Econfina Creek System.

10.2 Appendix B: SEFA Model Development and Evaluation of Instream Habitat Metrics for Gainer Spring Group, Williford Spring Group, and Sylvan Spring Group Minimum Flows and Levels